

4



3

DWG NO. 1000072 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

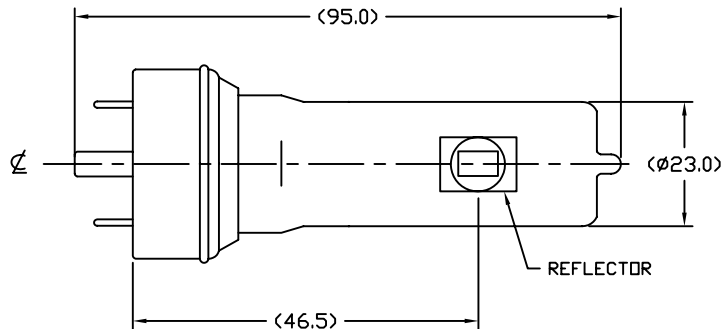

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS

VOLTAGE	120 V
WATTAGE	1200 W
COLOR TEMP.	3350 K
TOTAL LUMEN	N/A
BASE TYPE	G17t-7
AVERAGE LIFE	20 HRS
FILAMENT TYPE	C-13D
BURN POSITION	BD

NEXT ASSY USED ON

APPLICATION

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630	
		APPROVALS			
		DRAWN	R.AMPARO	08/30/99	TITLE BRN JCS120V-1200W
		CHKD	D.GILCZYNSKI	08/30/99	
		ENGR			
		MFG			
MATERIAL COMPOSITE	QUAL		SIZE	CODE IDENT NO.	DWG NO.
FINISH	DSGN ACTVY		B	BRN	1000072
	GOVT ACTVY		SCALE	WEIGHT	SHEET
			NONE		1 OF 1

4

3

2

1

CAD