


4

3

DWG NO. 1000077 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

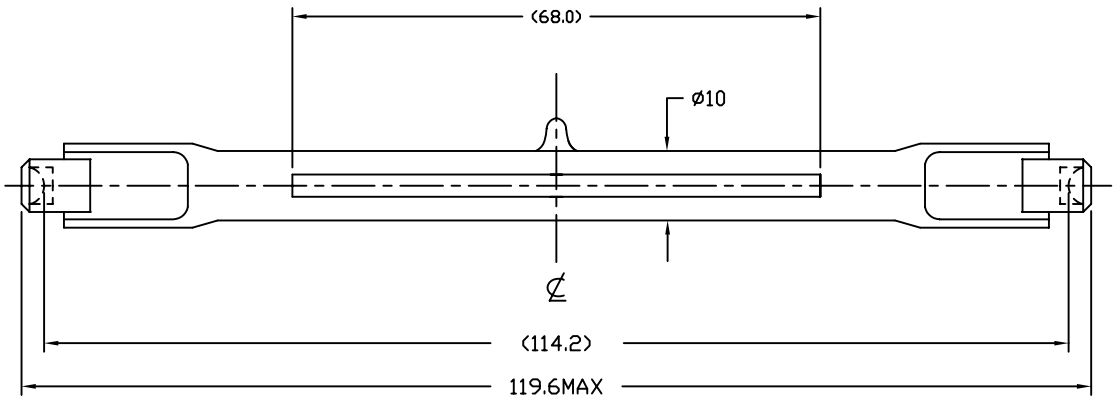

- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	240 V
WATTAGE	500 W
LUMENS	9500 Lm
COLOR TEMP.	3000 K
BASE TYPE	R7S-12
AVERAGE LIFE	2000 HRS
FILAMENT TYPE	C-8
BURN POSITION	Horizontal±4°

APPLICATION	
NEXT ASSY	USED ON

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING	CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630			
	APPROVALS					DATE
	DRAWN	R.AMPARO	08/16/99	TITLE BSH J240V-500WN		
	CHKD	D.GILCZYNSKI	08/16/99			
	ENGR					
MATERIAL COMPOSITE	MFG		SIZE CODE IDENT NO. DWG NO. B BSH 1000077			
	QUAL					
FINISH	DSGN ACTVY		SCALE NONE WEIGHT SHEET 1 OF 1			
	GOVT ACTVY					