


4

3

DWG NO. 1000082 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

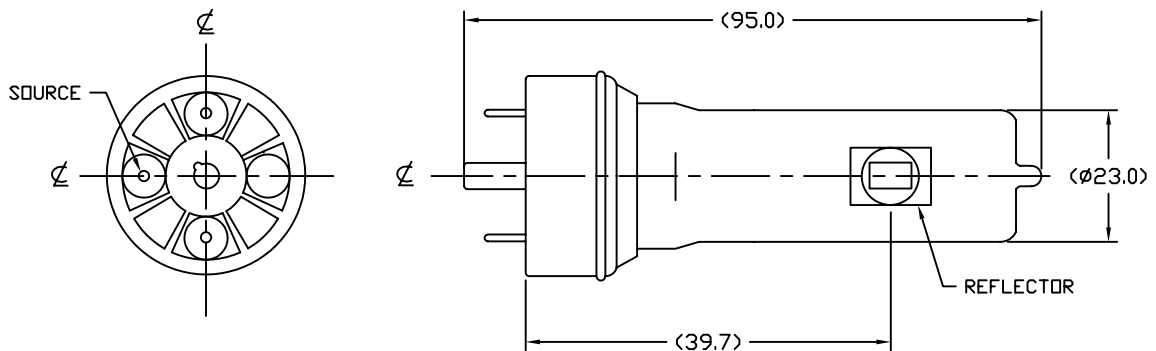

- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	1200 W
COLOR TEMP.	3350 K
TOTAL LUMEN	38200 Lm
BASE TYPE	G17t-7
AVERAGE LIFE	20 HRS
FILAMENT TYPE	C-13D
BURN POSITION	BD

NEXT ASSY	USED ON
APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING MATERIAL COMPOSITE FINISH		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO			08/30/99
		CHKD	D.GILCZYNSKI			08/30/99
		ENGR		TITLE BTG JCS120V-1200W		
		MFG				
		QUAL				
		DSGN ACTVY				
		GOVT ACTVY		SIZE	CODE IDENT NO.	DWG NO.
				B	BTG	1000082
		SCALE	WEIGHT	SHEET		
		NONE		1 OF 1		