

4


3

DWG NO. 1000086 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

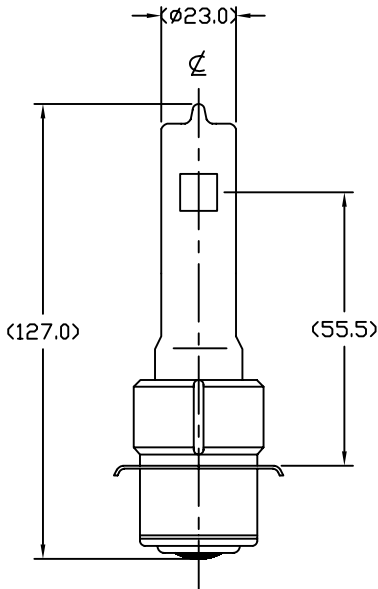

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	750 W
COLOR TEMP.	3200 K
TOTAL LUMEN	20000 Lm
BASE TYPE	P28S
AVERAGE LIFE	200 HRS
FILAMENT TYPE	C-13D
BURN POSITION	BD/Hor

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DATE		
			DRAWN	R.AMPARO	08/31/99
			CHKD	D.GILCZYNSKI	08/31/99
			ENGR		
			MFG		
			QUAL		
			DSGN ACTVY		
			GOV'T ACTVY		
MATERIAL			USHIO AMERICA, INC.		
COMPOSITE			5440 Cerritos Avenue Cypress, CA 90630		
FINISH			TITLE		
			BTP		
			JCS120V-750WCP28		
			SIZE	CODE IDENT NO.	DWG NO.
			B	BTP	1000086
			SCALE	WEIGHT	SHEET
			NONE		1 OF 1