


	E155P120H E155P120C E155PL120 E155PL120C
Start method:	Programmed Start
Connection type:	Leads (H) or Connectors
Input voltage:	120±10%, 50/60Hz
Lamp Configuration	N/a

Electrical Specifications

Lamp Class	LPS #	Rated Lamp (W)	Min. Start Temp (F)	Ballast Factor	Input Current (A)	Input Power (W)	Power Factor	MAX LCCF	MAX % THD
F54T5 HO	1	54	0	1.00	0.48	57.3	0.99	1.55	10
F39T5 HO	1	36	0	1.20	0.37	44.6	0.99		
F24T5 HO	1	24	0	1.30	0.25	29.5	0.99		
FT55/2G11	1	55	0	1.00	0.43	51.7	0.99		
FT50/2G11	1	50	0	1.00	0.47	56.3	0.99		
FT36/2G11	1	36	0	1.00	0.35	41.6	0.99		


Wiring Diagram

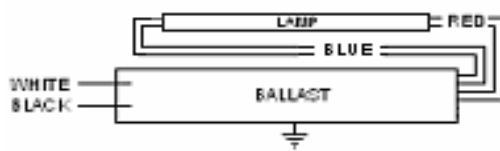

Lead Length (inches)

Black	N/A
White	N/A
Green	N/A
Blue	N/A
Red	N/A
Yellow	N/A

Enclosure Drawing

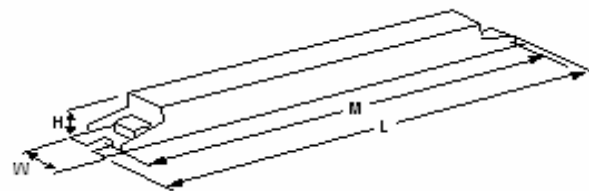

Enclosure Dimensions (inches)

Length (L)	Width (W)	Height (H)	Mounting (M)
14.22	1.15	0.95	13.75

Caution: Leaded ballasts (H suffix) are being phased out.
PL ballast are optimized for FT55/ FT50/ FT36 lamps.

NOTES:

1. Conforms to FCC, part 18, Class A for commercial applications.
2. Conforms to ANSI C62.41-1993 for transient protection.
5. Conforms to ANSI C82.11
4. Class P, sound rated A