


4

3

DWG NO. 1000088 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

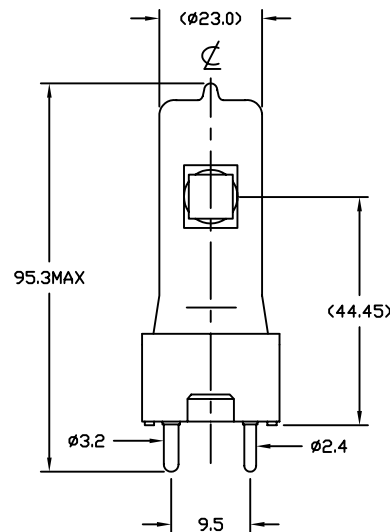

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	900 W
BULB FINISH	CLEAR
COLOR TEMP.	3300 K
BASE TYPE	GY9.5
AVERAGE LIFE	75 HRS
FILAMENT TYPE	CC-13D
BURN POSITION	BD/Hor

NEXT ASSY	USED ON

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS		
LIST OF MATERIALS							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630			
		APPROVALS				DATE	
		DRAWN R.AMPARO	08/31/99				
		CHKD D.GILCZYNSKI	08/31/99	TITLE	BVA JCS120V-900W		
		ENGR					
		MFG					
		QUAL					
		MATERIAL	COMPOSITE		SIZE	CODE IDENT NO.	DWG NO.
		FINISH	DSGN ACTVY		B	BVA	1000088
			GOVT ACTVY		SCALE	WEIGHT	SHEET
			NONE		1 OF 1		

4

3

2

1

CAD