



GLASS TUBE W/
ALUMINUM END CAP

- Compatible Control Systems
 - Lutron EcoSystem Digital Control – dims down to 1%
 - Lutron 3-Wire Phase Control – dims down to 1%
 - DALI Digital – dims down to 1%
 - 0-10V – dims down to 5%
 - Line Voltage Dimming (LVD) – 5% (120V only for dimming)
- Simplest & safest option for substantial maintenance and energy savings
- Keep existing fixtures, sensors, and control system—no mess, no fixture recycling, and no need to break the ceiling plane
- Retrofit for over 50% less than installing a new fixture
- Optimize local utility rebates



120-277V
EXT DRIVER / LVD =
120V DIMMING ONLY

0-10V
DIMMING
DIMS DOWN TO 5%

**LUTRON ECOSYSTEM
& 3-WIRE**

**TYPE C
RETROFIT**

20% THD
>90
PWR FACTOR

195°
BEAM ANGLE

320°
LIGHT
DISTRIBUTION

80+
CRI

32°F TO 104°F
OPERATING TEMP

50,000hrs
L70
RATED LIFE

ETL CLASSIFIED



NOT ALL PRODUCT COMBINATIONS ARE LISTED ON THE DLC QUALIFIED PRODUCTS LIST. WHEN SEARCHING THE DLC QPL, USE QUOTATION MARKS AROUND OUR BRAND NAME OR PART # ("C-FLEX" OR "RP-T8-4FT-1L-830-10V-M-G2-10W") OR VISIT OUR WEBSITE (WWW.C-FLEXRETROFITS.COM) FOR AN EXCEL FILE THAT PROVIDES A FULL LISTING OF QUALIFIED PRODUCTS AND INCLUDES THE DLC PRODUCT ID.



PART NUMBER BUILDER

MFR	TYPE	LENGTH	# OF LAMPS	CCT	CONTROL INTERFACE*	CASE (C)	GEN	OPTIONS
RP							G2	
	T8LO	2FT	1L	830 = 3000K	E1 = LUTRON ECO SYSTEM (DIMS DOWN TO 1%)	K = SQUARE W/ STUDS		-BMF
	T8HO	3FT	2L	835 = 3500K	3W = LUTRON 3-WIRE (DIMS DOWN TO 1%)	KN = SQUARE W/O STUDS		-EMG
	T8	4FT	3L	840 = 4000K	10V = 0-10V DIMMING (DIMS DOWN TO 5%. KITS W/ M CASE DRIVER REQUIRE WATTAGE OPTION. SEE CONFIGURATION TABLE BELOW FOR SETTINGS)	M = LINEAR (SEE DIMENSIONS ON LAST PAGE)		-W
	T5		4L	850 = 5000K	LVD = LINE VOLTAGE DIMMING (5% DIMMING TYPICAL. 120V/277V SWITCHED; 120V ONLY FOR DIMMING)			SEE TABLE BELOW
	T5HO				DA = DALI DIGITAL (DEFAULT DRIVER SETTINGS: CONTROL OUTPUT ENABLED, LOGARITHMIC DIMMING, 1% DIMMING LEVEL. CONTACT US IF DIFFERENT SETTINGS ARE REQUIRED)			
					*CONTACT US FOR ADDITIONAL CONTROL OPTIONS			

EXAMPLE PART NUMBER RP-T8-4FT-1L-830-10V-M-G2-EMG

OPTIONS

BMF	EMG	W
ECOSYSTEM BALLAST MODULE Must specify 3W control only. Used only if EC5 ballast had sensors connected.	EMERGENCY BATTERY BACKUP (See page 8 for more details)	SPECIFIC WATTAGE (Only required with 0-10V M-case driver option)
		

E1 DRIVER (PG. 9) W/ EMG CONFIGURATIONS (PG. 8)

PART #	LAMPS PER DRIVER	SYSTEM WATTAGE	SYSTEM LUMENS	EMG CONFIGURATION
RP-T5-2FT-1L-8XX-E1-C-G2	1	13	1430	A
RP-T5-2FT-2L-8XX-E1-C-G2	2	25	2750	A
RP-T5-2FT-3L-8XX-E1-C-G2	3	38	4180	A
RP-T5-3FT-1L-8XX-E1-C-G2	1	13	1430	A
RP-T5-3FT-2L-8XX-E1-C-G2	2	25	2750	A
RP-T5-3FT-3L-8XX-E1-C-G2	3	38	4180	A
RP-T5-4FT-1L-8XX-E1-C-G2	1	19	2090	A
RP-T5-4FT-2L-8XX-E1-C-G2	2	37	4070	A
RP-T5-4FT-3L-8XX-E1-C-G2	3	55	6050	B
RP-T5HO-2FT-1L-8XX-E1-C-G2	1	15	1650	A
RP-T5HO-2FT-2L-8XX-E1-C-G2	2	29	3190	A
RP-T5HO-2FT-3L-8XX-E1-C-G2	3	44	4840	B
RP-T5HO-3FT-1L-8XX-E1-C-G2	1	15	1650	A
RP-T5HO-3FT-2L-8XX-E1-C-G2	2	29	3190	A
RP-T5HO-3FT-3L-8XX-E1-C-G2	3	44	4840	B
RP-T5HO-4FT-1L-8XX-E1-C-G2	1	29	3190	A
RP-T5HO-4FT-2L-8XX-E1-C-G2	2	58	6380	B
RP-T5HO-4FT-3L-8XX-E1-C-G2	3	87	9570	C
RP-T8LO-4FT-1L-8XX-E1-C-G2	1	17	1870	A
RP-T8LO-4FT-2L-8XX-E1-C-G2	2	29	3190	A
RP-T8LO-4FT-3L-8XX-E1-C-G2	3	41	4510	B
RP-T8LO-4FT-4L-8XX-E1-C-G2	4	56	6160	B
RP-T8-2FT-1L-8XX-E1-C-G2	1	12	1320	A
RP-T8-2FT-2L-8XX-E1-C-G2	2	18	1980	A
RP-T8-2FT-3L-8XX-E1-C-G2	3	28	3080	A
RP-T8-2FT-4L-8XX-E1-C-G2	4	38	4180	B
RP-T8-3FT-1L-8XX-E1-C-G2	1	12	1320	A
RP-T8-3FT-2L-8XX-E1-C-G2	2	18	1980	A
RP-T8-3FT-3L-8XX-E1-C-G2	3	28	3080	B
RP-T8-3FT-4L-8XX-E1-C-G2	4	38	4180	B
RP-T8-4FT-1L-8XX-E1-C-G2	1	18	1980	A
RP-T8-4FT-2L-8XX-E1-C-G2	2	35	3850	A
RP-T8-4FT-3L-8XX-E1-C-G2	3	53	5830	B
RP-T8-4FT-4L-8XX-E1-C-G2	4	71	7810	B
RP-T8HO-4FT-1L-8XX-E1-C-G2	1	28	3080	A
RP-T8HO-4FT-2L-8XX-E1-C-G2	2	51	5610	B
RP-T8HO-4FT-3L-8XX-E1-C-G2	3	74	8140	C



3W DRIVER (PG. 9) W/ EMG CONFIGURATIONS (PG. 8)

PART #	LAMPS PER DRIVER	SYSTEM WATTAGE	SYSTEM LUMENS	EMG CONFIGURATION
RP-T5-2FT-1L-8XX-3W-C-G2	1	13	1430	A
RP-T5-2FT-2L-8XX-3W-C-G2	2	25	2750	A
RP-T5-2FT-3L-8XX-3W-C-G2	3	38	4180	A
RP-T5-3FT-1L-8XX-3W-C-G2	1	13	1430	A
RP-T5-3FT-2L-8XX-3W-C-G2	2	25	2750	A
RP-T5-3FT-3L-8XX-3W-C-G2	3	38	4180	A
RP-T5-4FT-1L-8XX-3W-C-G2	1	19	2090	A
RP-T5-4FT-2L-8XX-3W-C-G2	2	37	4070	A
RP-T5-4FT-3L-8XX-3W-C-G2	3	48	5280	B
RP-T5HO-2FT-1L-8XX-3W-C-G2	1	15	1650	A
RP-T5HO-2FT-2L-8XX-3W-C-G2	2	29	3190	A
RP-T5HO-2FT-3L-8XX-3W-C-G2	3	44	4840	B
RP-T5HO-3FT-1L-8XX-3W-C-G2	1	15	1650	A
RP-T5HO-3FT-2L-8XX-3W-C-G2	2	29	3190	A
RP-T5HO-3FT-3L-8XX-3W-C-G2	3	44	4840	B
RP-T5HO-4FT-1L-8XX-3W-C-G2	1	29	3190	A
RP-T5HO-4FT-2L-8XX-3W-C-G2	2	48	5280	B
RP-T8LO-4FT-1L-8XX-3W-C-G2	1	17	1870	A
RP-T8LO-4FT-2L-8XX-3W-C-G2	2	29	3190	A
RP-T8LO-4FT-3L-8XX-3W-C-G2	3	41	4510	B
RP-T8-2FT-1L-8XX-3W-C-G2	1	13	1430	A
RP-T8-2FT-2L-8XX-3W-C-G2	2	18	1980	A
RP-T8-2FT-3L-8XX-3W-C-G2	3	28	3080	A
RP-T8-2FT-4L-8XX-3W-C-G2	4	38	4180	B
RP-T8-3FT-1L-8XX-3W-C-G2	1	12	1320	A
RP-T8-3FT-2L-8XX-3W-C-G2	2	18	1980	A
RP-T8-3FT-3L-8XX-3W-C-G2	3	28	3080	B
RP-T8-3FT-4L-8XX-3W-C-G2	4	38	4180	B
RP-T8-4FT-1L-8XX-3W-C-G2	1	18	1980	A
RP-T8-4FT-2L-8XX-3W-C-G2	2	35	3850	A
RP-T8-4FT-3L-8XX-3W-C-G2	3	48	5280	B
RP-T8HO-4FT-1L-8XX-3W-C-G2	1	28	3080	A
RP-T8HO-4FT-2L-8XX-3W-C-G2	2	48	5280	B

LVD-KN DRIVER (PG. 9) W/ EMG CONFIGURATIONS (PG. 8)

PART #	LAMPS PER DRIVER	SYSTEM WATTAGE	SYSTEM LUMENS	EMG CONFIGURATION
RP-T5-2FT-1L-8XX-LVD-KN-G2	1	11	1210	A
RP-T5-2FT-2L-8XX-LVD-KN-G2	2	22	2420	A
RP-T5-2FT-3L-8XX-LVD-KN-G2	3	33	3630	A
RP-T5-3FT-1L-8XX-LVD-KN-G2	1	11	1210	A
RP-T5-3FT-2L-8XX-LVD-KN-G2	2	22	2420	A
RP-T5-3FT-3L-8XX-LVD-KN-G2	3	33	3630	A
RP-T5-4FT-1L-8XX-LVD-KN-G2	1	19	2090	A
RP-T5-4FT-2L-8XX-LVD-KN-G2	2	37	4070	A
RP-T5-4FT-3L-8XX-LVD-KN-G2	3	55	6050	B
RP-T5HO-2FT-1L-8XX-LVD-KN-G2	1	15	1650	A
RP-T5HO-2FT-2L-8XX-LVD-KN-G2	2	29	3190	A
RP-T5HO-2FT-3L-8XX-LVD-KN-G2	3	42	4620	B
RP-T5HO-3FT-1L-8XX-LVD-KN-G2	1	15	1650	A
RP-T5HO-3FT-2L-8XX-LVD-KN-G2	2	29	3190	A
RP-T5HO-3FT-3L-8XX-LVD-KN-G2	3	42	4620	B
RP-T5HO-4FT-1L-8XX-LVD-KN-G2	1	29	3190	A
RP-T5HO-4FT-2L-8XX-LVD-KN-G2	2	58	6380	B
RP-T5HO-4FT-3L-8XX-LVD-KN-G2	3	69	7590	C
RP-T8LO-4FT-1L-8XX-LVD-KN-G2	1	13	1430	A
RP-T8LO-4FT-2L-8XX-LVD-KN-G2	2	26	2860	A
RP-T8LO-4FT-3L-8XX-LVD-KN-G2	3	38	4180	B
RP-T8LO-4FT-4L-8XX-LVD-KN-G2	4	56	6160	B
RP-T8-2FT-1L-8XX-LVD-KN-G2	1	12	1320	A
RP-T8-2FT-2L-8XX-LVD-KN-G2	2	18	1980	A
RP-T8-2FT-3L-8XX-LVD-KN-G2	3	28	3080	A
RP-T8-2FT-4L-8XX-LVD-KN-G2	4	38	4180	B
RP-T8-3FT-1L-8XX-LVD-KN-G2	1	12	1320	A
RP-T8-3FT-2L-8XX-LVD-KN-G2	2	18	1980	A
RP-T8-3FT-3L-8XX-LVD-KN-G2	3	28	3080	B
RP-T8-3FT-4L-8XX-LVD-KN-G2	4	38	4180	B
RP-T8-4FT-1L-8XX-LVD-KN-G2	1	19	2090	A
RP-T8-4FT-2L-8XX-LVD-KN-G2	2	37	4070	A
RP-T8-4FT-3L-8XX-LVD-KN-G2	3	55	6050	B
RP-T8-4FT-4L-8XX-LVD-KN-G2	4	71	7810	B
RP-T8HO-4FT-1L-8XX-LVD-KN-G2	1	27	2970	A
RP-T8HO-4FT-2L-8XX-LVD-KN-G2	2	53	5830	B
RP-T8HO-4FT-3L-8XX-LVD-KN-G2	3	69	7590	C



LVD-M AND K DRIVER* (PG. 9) W/ EMG CONFIGURATIONS (PG. 8)

PART #	LAMPS PER DRIVER	SYSTEM WATTAGE	SYSTEM LUMENS	EMG CONFIGURATION
RP-T5-2FT-2L-8XX-LVD-C-G2	2	22	2420	A
RP-T5-2FT-3L-8XX-LVD-C-G2	3	33	3630	A
RP-T5-3FT-2L-8XX-LVD-C-G2	2	22	2420	A
RP-T5-3FT-3L-8XX-LVD-C-G2	3	33	3630	A
RP-T5-4FT-2L-8XX-LVD-C-G2	2	37	4070	A
RP-T5HO-2FT-2L-8XX-LVD-C-G2	2	29	3190	A
RP-T5HO-2FT-3L-8XX-LVD-C-G2	3	42	4620	B
RP-T5HO-3FT-2L-8XX-LVD-C-G2	2	29	3190	A
RP-T5HO-3FT-3L-8XX-LVD-C-G2	3	42	4620	B
RP-T5HO-4FT-1L-8XX-LVD-C-G2	1	29	3190	A
RP-T8LO-4FT-2L-8XX-LVD-C-G2	2	26	2860	A
RP-T8LO-4FT-3L-8XX-LVD-C-G2	3	38	4180	B
RP-T8-2FT-3L-8XX-LVD-C-G2	3	28	3080	A
RP-T8-2FT-4L-8XX-LVD-C-G2	4	38	4180	B
RP-T8-3FT-2L-8XX-LVD-C-G2	2	18	1980	A
RP-T8-3FT-3L-8XX-LVD-C-G2	3	28	3080	B
RP-T8-4FT-2L-8XX-LVD-C-G2	2	37	4070	A
RP-T8HO-4FT-1L-8XX-LVD-C-G2	1	27	2970	A

*REPLACE "C" WITH M OR K IN ORDER TO SPECIFY DRIVE CASE TYPE

10V-M DRIVER (PG. 9) W/ EMG CONFIGURATIONS (PG. 8)

PART #	LAMPS PER DRIVER	SYSTEM WATTAGE	SYSTEM LUMENS	EMG CONFIGURATION
RP-T5-2FT-1L-8XX-10V-M-G2-6W	1	6	660	A
RP-T5-3FT-1L-8XX-10V-M-G2-6W	1	6	660	A
RP-T5-4FT-1L-8XX-10V-M-G2-6W	1	6	660	A
RP-T8-2FT-1L-8XX-10V-M-G2-6W	1	6	660	A
RP-T8-3FT-1L-8XX-10V-M-G2-6W	1	6	660	A
RP-T8-4FT-1L-8XX-10V-M-G2-6W	1	6	660	A
RP-T5-2FT-1L-8XX-10V-M-G2-8W	1	8	880	A
RP-T5-3FT-1L-8XX-10V-M-G2-8W	1	8	880	A
RP-T5-4FT-1L-8XX-10V-M-G2-8W	1	8	880	A
RP-T8-2FT-1L-8XX-10V-M-G2-8W	1	8	880	A
RP-T8-3FT-1L-8XX-10V-M-G2-8W	1	8	880	A
RP-T8-4FT-1L-8XX-10V-M-G2-8W	1	8	880	A
RP-T5-2FT-1L-8XX-10V-M-G2-10W	1	10	1100	A
RP-T5-2FT-2L-8XX-10V-M-G2-10W	2	10	1100	A
RP-T5-3FT-1L-8XX-10V-M-G2-10W	1	10	1100	A
RP-T5-4FT-1L-8XX-10V-M-G2-10W	1	10	1100	A
RP-T8-2FT-1L-8XX-10V-M-G2-10W	1	10	1100	A
RP-T8-2FT-2L-8XX-10V-M-G2-10W	2	10	1100	A
RP-T8-3FT-1L-8XX-10V-M-G2-10W	1	10	1100	A
RP-T8-4FT-1L-8XX-10V-M-G2-10W	1	10	1100	A
RP-T5-2FT-1L-8XX-10V-M-G2-12W	1	12	1320	A
RP-T5-2FT-2L-8XX-10V-M-G2-12W	2	12	1320	A
RP-T5-2FT-3L-8XX-10V-M-G2-12W	3	12	1320	A
RP-T5-3FT-1L-8XX-10V-M-G2-12W	1	12	1320	A
RP-T5-3FT-2L-8XX-10V-M-G2-12W	2	12	1320	A
RP-T5-4FT-1L-8XX-10V-M-G2-12W	1	12	1320	A
RP-T5-4FT-2L-8XX-10V-M-G2-12W	2	12	1320	A
RP-T8-2FT-2L-8XX-10V-M-G2-12W	2	12	1320	A
RP-T8-2FT-3L-8XX-10V-M-G2-12W	3	12	1320	A
RP-T8-3FT-1L-8XX-10V-M-G2-12W	1	12	1320	A
RP-T8-3FT-2L-8XX-10V-M-G2-12W	2	12	1320	A
RP-T8-4FT-1L-8XX-10V-M-G2-12W	1	12	1320	A
RP-T8-4FT-2L-8XX-10V-M-G2-12W	2	12	1320	A
RP-T5-2FT-1L-8XX-10V-M-G2-15W	1	15	1650	A
RP-T5-2FT-2L-8XX-10V-M-G2-15W	2	15	1650	A
RP-T5-2FT-3L-8XX-10V-M-G2-15W	3	15	1650	A
RP-T5-3FT-1L-8XX-10V-M-G2-15W	1	15	1650	A
RP-T5-3FT-2L-8XX-10V-M-G2-15W	2	15	1650	A
RP-T5-3FT-3L-8XX-10V-M-G2-15W	3	15	1650	A
RP-T5-4FT-1L-8XX-10V-M-G2-15W	1	15	1650	A
RP-T5-4FT-2L-8XX-10V-M-G2-15W	2	15	1650	A
RP-T8-2FT-2L-8XX-10V-M-G2-15W	2	15	1650	A
RP-T8-2FT-3L-8XX-10V-M-G2-15W	3	15	1650	A
RP-T8-3FT-2L-8XX-10V-M-G2-15W	2	15	1650	A
RP-T8-3FT-3L-8XX-10V-M-G2-15W	3	15	1650	A
RP-T8-4FT-1L-8XX-10V-M-G2-15W	1	15	1650	A
RP-T8-4FT-2L-8XX-10V-M-G2-15W	2	15	1650	A



10V-M DRIVER (PG. 9) W/ EMG CONFIGURATIONS (PG. 8)

PART #	LAMPS PER DRIVER	SYSTEM WATTAGE	SYSTEM LUMENS	EMG CONFIGURATION
RP-T5-2FT-2L-8XX-10V-M-G2-18W	2	18	1980	A
RP-T5-2FT-3L-8XX-10V-M-G2-18W	3	18	1980	A
RP-T5-2FT-4L-8XX-10V-M-G2-18W	4	18	1980	A
RP-T5-3FT-2L-8XX-10V-M-G2-18W	2	18	1980	A
RP-T5-3FT-3L-8XX-10V-M-G2-18W	3	18	1980	A
RP-T5-3FT-4L-8XX-10V-M-G2-18W	4	18	1980	A
RP-T5-4FT-1L-8XX-10V-M-G2-18W	1	18	1980	A
RP-T5-4FT-2L-8XX-10V-M-G2-18W	2	18	1980	A
RP-T5-4FT-3L-8XX-10V-M-G2-18W	3	18	1980	A
RP-T8-2FT-2L-8XX-10V-M-G2-18W	2	18	1980	A
RP-T8-2FT-3L-8XX-10V-M-G2-18W	3	18	1980	A
RP-T8-2FT-4L-8XX-10V-M-G2-18W	4	18	1980	A
RP-T8-3FT-2L-8XX-10V-M-G2-18W	2	18	1980	A
RP-T8-3FT-3L-8XX-10V-M-G2-18W	3	18	1980	A
RP-T8-3FT-4L-8XX-10V-M-G2-18W	4	18	1980	A
RP-T8-4FT-1L-8XX-10V-M-G2-18W	1	18	1980	A
RP-T8-4FT-2L-8XX-10V-M-G2-18W	2	18	1980	A
RP-T8-4FT-3L-8XX-10V-M-G2-18W	3	18	1980	A
RP-T5-2FT-2L-8XX-10V-M-G2-20W	2	20	2200	A
RP-T5-2FT-3L-8XX-10V-M-G2-20W	3	20	2200	A
RP-T5-2FT-4L-8XX-10V-M-G2-20W	4	20	2200	A
RP-T5-3FT-2L-8XX-10V-M-G2-20W	2	20	2200	A
RP-T5-3FT-3L-8XX-10V-M-G2-20W	3	20	2200	A
RP-T5-3FT-4L-8XX-10V-M-G2-20W	4	20	2200	A
RP-T5-4FT-1L-8XX-10V-M-G2-20W	1	20	2200	A
RP-T5-4FT-2L-8XX-10V-M-G2-20W	2	20	2200	A
RP-T5-4FT-3L-8XX-10V-M-G2-20W	3	20	2200	A
RP-T8-2FT-2L-8XX-10V-M-G2-20W	2	20	2200	A
RP-T8-2FT-3L-8XX-10V-M-G2-20W	3	20	2200	A
RP-T8-2FT-4L-8XX-10V-M-G2-20W	4	20	2200	A
RP-T8-3FT-2L-8XX-10V-M-G2-20W	2	20	2200	A
RP-T8-3FT-3L-8XX-10V-M-G2-20W	3	20	2200	A
RP-T8-3FT-4L-8XX-10V-M-G2-20W	4	20	2200	A
RP-T8-4FT-1L-8XX-10V-M-G2-20W	1	20	2200	A
RP-T8-4FT-2L-8XX-10V-M-G2-20W	2	20	2200	A
RP-T8-4FT-3L-8XX-10V-M-G2-20W	3	20	2200	A
RP-T5-2FT-2L-8XX-10V-M-G2-25W	2	25	2750	A
RP-T5-2FT-3L-8XX-10V-M-G2-25W	3	25	2750	A
RP-T5-2FT-4L-8XX-10V-M-G2-25W	4	25	2750	A
RP-T5-3FT-2L-8XX-10V-M-G2-25W	2	25	2750	A
RP-T5-3FT-3L-8XX-10V-M-G2-25W	3	25	2750	A
RP-T5-3FT-4L-8XX-10V-M-G2-25W	4	25	2750	A
RP-T5-4FT-2L-8XX-10V-M-G2-25W	2	25	2750	A
RP-T5-4FT-3L-8XX-10V-M-G2-25W	3	25	2750	A
RP-T5-4FT-4L-8XX-10V-M-G2-25W	4	25	2750	A
RP-T5HO-4FT-1L-8XX-10V-M-G2-25W	1	25	2750	A
RP-T8-2FT-3L-8XX-10V-M-G2-25W	3	25	2750	A
RP-T8-2FT-4L-8XX-10V-M-G2-25W	4	25	2750	A
RP-T8-3FT-2L-8XX-10V-M-G2-25W	2	25	2750	A
RP-T8-3FT-3L-8XX-10V-M-G2-25W	3	25	2750	A
RP-T8-3FT-4L-8XX-10V-M-G2-25W	4	25	2750	A
RP-T8-4FT-1L-8XX-10V-M-G2-25W	1	25	2750	A
RP-T8-4FT-2L-8XX-10V-M-G2-25W	2	25	2750	A
RP-T8-4FT-3L-8XX-10V-M-G2-25W	3	25	2750	A
RP-T8-4FT-4L-8XX-10V-M-G2-25W	4	25	2750	A
RP-T5-2FT-3L-8XX-10V-M-G2-30W	3	30	3300	A
RP-T5-2FT-4L-8XX-10V-M-G2-30W	4	30	3300	A
RP-T5-3FT-2L-8XX-10V-M-G2-30W	2	30	3300	A
RP-T5-3FT-3L-8XX-10V-M-G2-30W	3	30	3300	A
RP-T5-3FT-4L-8XX-10V-M-G2-30W	4	30	3300	A
RP-T5-4FT-2L-8XX-10V-M-G2-30W	2	30	3300	A
RP-T5-4FT-3L-8XX-10V-M-G2-30W	3	30	3300	A
RP-T5-4FT-4L-8XX-10V-M-G2-30W	4	30	3300	A
RP-T8-2FT-3L-8XX-10V-M-G2-30W	3	30	3300	A
RP-T8-2FT-4L-8XX-10V-M-G2-30W	4	30	3300	A
RP-T8-3FT-3L-8XX-10V-M-G2-30W	3	30	3300	A
RP-T8-3FT-4L-8XX-10V-M-G2-30W	4	30	3300	A
RP-T8-4FT-2L-8XX-10V-M-G2-30W	2	30	3300	A
RP-T8-4FT-3L-8XX-10V-M-G2-30W	3	30	3300	A
RP-T8-4FT-4L-8XX-10V-M-G2-30W	4	30	3300	A



10V-M DRIVER (PG. 9) W/ EMG CONFIGURATIONS (PG. 8)

PART #	LAMPS PER DRIVER	SYSTEM WATTAGE	SYSTEM LUMENS	EMG CONFIGURATION
RP-T5-2FT-3L-8XX-10V-M-G2-35W	3	35	3850	A
RP-T5-2FT-4L-8XX-10V-M-G2-35W	4	35	3850	A
RP-T5-3FT-3L-8XX-10V-M-G2-35W	3	35	3850	A
RP-T5-3FT-4L-8XX-10V-M-G2-35W	4	35	3850	A
RP-T5-4FT-2L-8XX-10V-M-G2-35W	2	35	3850	A
RP-T5-4FT-3L-8XX-10V-M-G2-35W	3	35	3850	A
RP-T5-4FT-4L-8XX-10V-M-G2-35W	4	35	3850	A
RP-T8-2FT-4L-8XX-10V-M-G2-35W	4	35	3850	A
RP-T8-3FT-3L-8XX-10V-M-G2-35W	3	35	3850	A
RP-T8-3FT-4L-8XX-10V-M-G2-35W	4	35	3850	A
RP-T8-4FT-2L-8XX-10V-M-G2-35W	2	35	3850	A
RP-T8-4FT-3L-8XX-10V-M-G2-35W	3	35	3850	A
RP-T8-4FT-4L-8XX-10V-M-G2-35W	4	35	3850	A
RP-T5-2FT-4L-8XX-10V-M-G2-40W	4	40	4400	B
RP-T5-3FT-4L-8XX-10V-M-G2-40W	4	40	4400	B
RP-T5-4FT-2L-8XX-10V-M-G2-40W	2	40	4400	B
RP-T5-4FT-3L-8XX-10V-M-G2-40W	3	40	4400	B
RP-T5-4FT-4L-8XX-10V-M-G2-40W	4	40	4400	B
RP-T8-2FT-4L-8XX-10V-M-G2-40W	4	40	4400	B
RP-T8-3FT-4L-8XX-10V-M-G2-40W	4	40	4400	B
RP-T8-4FT-2L-8XX-10V-M-G2-40W	2	40	4400	B
RP-T8-4FT-3L-8XX-10V-M-G2-40W	3	40	4400	B
RP-T8-4FT-4L-8XX-10V-M-G2-40W	4	40	4400	B
RP-T5-2FT-4L-8XX-10V-M-G2-45W	4	45	4950	B
RP-T5-3FT-4L-8XX-10V-M-G2-45W	4	45	4950	B
RP-T5-4FT-3L-8XX-10V-M-G2-45W	3	45	4950	B
RP-T5-4FT-4L-8XX-10V-M-G2-45W	4	45	4950	B
RP-T5HO-4FT-2L-8XX-10V-M-G2-45W	2	45	4950	B
RP-T8-3FT-4L-8XX-10V-M-G2-45W	4	45	4950	B
RP-T8-4FT-2L-8XX-10V-M-G2-45W	2	45	4950	B
RP-T8-4FT-3L-8XX-10V-M-G2-45W	3	45	4950	B
RP-T8-4FT-4L-8XX-10V-M-G2-45W	4	45	4950	B
RP-T5-4FT-3L-8XX-10V-M-G2-50W	3	50	5500	B
RP-T5-4FT-4L-8XX-10V-M-G2-50W	4	50	5500	B
RP-T5HO-4FT-2L-8XX-10V-M-G2-50W	2	50	5500	B
RP-T8-4FT-2L-8XX-10V-M-G2-50W	2	50	5500	B
RP-T8-4FT-3L-8XX-10V-M-G2-50W	3	50	5500	B
RP-T8-4FT-4L-8XX-10V-M-G2-50W	4	50	5500	B
RP-T5-4FT-3L-8XX-10V-M-G2-60W	3	60	6600	B
RP-T5-4FT-4L-8XX-10V-M-G2-60W	4	60	6600	B
RP-T8-4FT-3L-8XX-10V-M-G2-60W	3	60	6600	B
RP-T8-4FT-4L-8XX-10V-M-G2-60W	4	60	6600	B
RP-T5-4FT-3L-8XX-10V-M-G2-70W	3	70	7700	C
RP-T5-4FT-4L-8XX-10V-M-G2-70W	4	70	7700	C
RP-T8-4FT-3L-8XX-10V-M-G2-70W	3	70	7700	C
RP-T8-4FT-4L-8XX-10V-M-G2-70W	4	70	7700	C
RP-T5-4FT-4L-8XX-10V-M-G2-80W	4	80	8800	C
RP-T5HO-4FT-3L-8XX-10V-M-G2-80W	3	80	8800	C
RP-T8-4FT-3L-8XX-10V-M-G2-80W	3	80	8800	C
RP-T8-4FT-4L-8XX-10V-M-G2-80W	4	80	8800	C



DA DRIVER* (PG. 9) W/ EMG CONFIGURATIONS (PG. 8)

PART #	LAMPS PER DRIVER	SYSTEM WATTAGE	SYSTEM LUMENS	EMG CONFIGURATION
RP-T5-2FT-1L-8XX-DA-C-G2	1	13	1430	CONFIGURATION A
RP-T5-2FT-2L-8XX-DA-C-G2	2	25	2750	CONFIGURATION A
RP-T5-2FT-3L-8XX-DA-C-G2	3	38	4180	CONFIGURATION A
RP-T5-3FT-1L-8XX-DA-C-G2	1	13	1430	CONFIGURATION A
RP-T5-3FT-2L-8XX-DA-C-G2	2	25	2750	CONFIGURATION A
RP-T5-3FT-3L-8XX-DA-C-G2	3	38	4180	CONFIGURATION A
RP-T5-4FT-1L-8XX-DA-C-G2	1	19	2090	CONFIGURATION A
RP-T5-4FT-2L-8XX-DA-C-G2	2	37	4070	CONFIGURATION A
RP-T5-4FT-3L-8XX-DA-C-G2	3	55	6050	CONFIGURATION B
RP-T5HO-2FT-1L-8XX-DA-C-G2	1	15	1650	CONFIGURATION A
RP-T5HO-2FT-2L-8XX-DA-C-G2	2	29	3190	CONFIGURATION A
RP-T5HO-2FT-3L-8XX-DA-C-G2	3	44	4840	CONFIGURATION B
RP-T5HO-3FT-1L-8XX-DA-C-G2	1	15	1650	CONFIGURATION A
RP-T5HO-3FT-2L-8XX-DA-C-G2	2	29	3190	CONFIGURATION A
RP-T5HO-3FT-3L-8XX-DA-C-G2	3	44	4840	CONFIGURATION B
RP-T5HO-4FT-1L-8XX-DA-C-G2	1	29	3190	CONFIGURATION A
RP-T5HO-4FT-2L-8XX-DA-C-G2	2	58	6380	CONFIGURATION B
RP-T5HO-4FT-3L-8XX-DA-C-G2	3	87	9570	CONFIGURATION C
RP-T5HO-4FT-3L-8XX-LVD-KN-G2	3	69	7590	CONFIGURATION C
RP-T8LO-4FT-1L-8XX-DA-C-G2	1	17	1870	CONFIGURATION A
RP-T8LO-4FT-2L-8XX-DA-C-G2	2	29	3190	CONFIGURATION A
RP-T8LO-4FT-3L-8XX-DA-C-G2	3	41	4510	CONFIGURATION B
RP-T8LO-4FT-4L-8XX-DA-C-G2	4	56	6160	CONFIGURATION B
RP-T8-2FT-1L-8XX-DA-C-G2	1	12	1320	CONFIGURATION A
RP-T8-2FT-2L-8XX-DA-C-G2	2	18	1980	CONFIGURATION A
RP-T8-2FT-3L-8XX-DA-C-G2	3	28	3080	CONFIGURATION A
RP-T8-2FT-4L-8XX-DA-C-G2	4	38	4180	CONFIGURATION B
RP-T8-3FT-1L-8XX-DA-C-G2	1	12	1320	CONFIGURATION A
RP-T8-3FT-2L-8XX-DA-C-G2	2	18	1980	CONFIGURATION A
RP-T8-3FT-3L-8XX-DA-C-G2	3	28	3080	CONFIGURATION B
RP-T8-3FT-4L-8XX-DA-C-G2	4	38	4180	CONFIGURATION B
RP-T8-4FT-1L-8XX-DA-C-G2	1	18	1980	CONFIGURATION A
RP-T8-4FT-2L-8XX-DA-C-G2	2	35	3850	CONFIGURATION A
RP-T8-4FT-3L-8XX-DA-C-G2	3	53	5830	CONFIGURATION B
RP-T8-4FT-4L-8XX-DA-C-G2	4	71	7810	CONFIGURATION B
RP-T8HO-4FT-1L-8XX-DA-C-G2	1	28	3080	CONFIGURATION A
RP-T8HO-4FT-2L-8XX-DA-C-G2	2	51	5610	CONFIGURATION B
RP-T8HO-4FT-3L-8XX-DA-C-G2	3	74	8140	CONFIGURATION C

*DEFAULT DRIVER SETTINGS: CONTROL OUTPUT ENABLED, LOGARITHMIC DIMMING, 1% DIMMING LEVEL. CONTACT US IF DIFFERENT SETTINGS ARE REQUIRED



EMG CONFIGURATIONS

4W ALL-IN-ONE EMG [CONFIGURATION A]

EXISTING TUBES WILL LIGHT IN EMG MODE
Approximately 500 lumens for 90 minutes.
Contact us for more options

DRIVER



EMG DIMENSIONS: 5.34" x 1.69" x 1.01"
(SEE LINE DRAWING BELOW)
SEE EXAMPLE 1 BELOW FOR WIRING DIAGRAM

4W ALL-IN-ONE EMG W/ SEPARATE LIGHT ENGINE
[CONFIGURATION B]

SEPARATE LIGHT ENGINE WILL LIGHT IN EMG MODE
Approximately 500 lumens for 90 minutes.
Contact us for more options

DRIVER



LIGHT ENGINE



EMG DIMENSIONS: 5.34" x 1.69" x 1.01"
(SEE LINE DRAWING BELOW)
LIGHT ENGINE DIMENSIONS: 4.7" x .83" x .04"
SEE EXAMPLE 2 BELOW FOR WIRING DIAGRAM

**8W EMG DRIVER, SEPARATE BATTERY & LIGHT ENGINE
[CONFIGURATION C]**

SEPARATE LIGHT ENGINE WILL LIGHT IN EMG MODE
Approximately 1000 lumens for 90 minutes.
Contact us for more options


DRIVER + LIGHT ENGINE



EMG DIMENSIONS: 5.34" x 1.69" x 1.01"
(SEE LINE DRAWING BELOW)
LIGHT ENGINE DIMENSIONS: 4.7" x .83" x .04"
BATTERY DIMENSIONS: 3.48" x 2.76" x .99"
(SEE LINE DRAWING BELOW)


EMG

USED FOR ALL EMG KITS

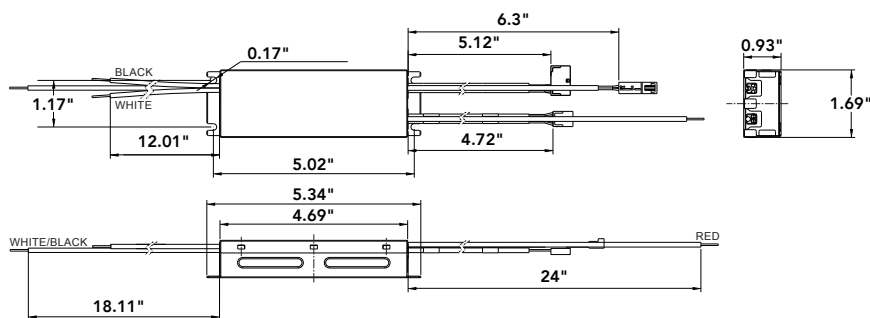


EMG W/ EXTERNAL BATTERY

USED FOR CONFIGURATION C




WIRING DIAGRAMS

CONFIGURATION A

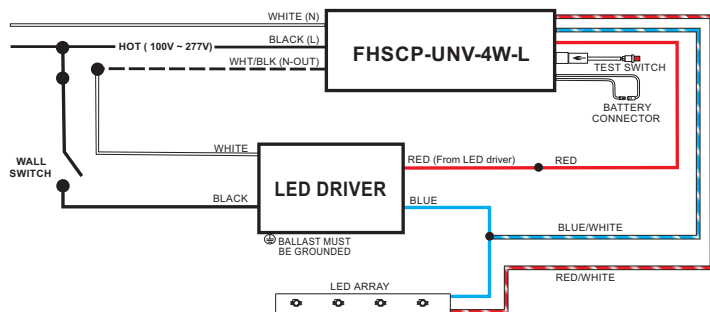

CONFIGURATION B & C

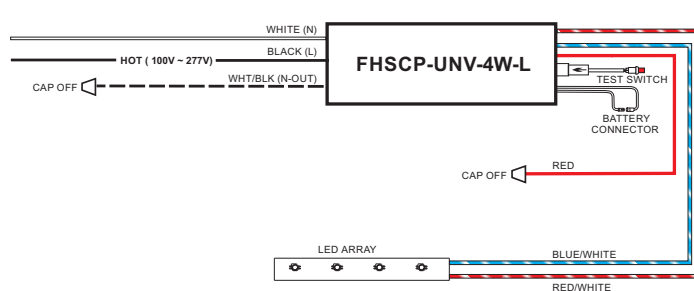




DRIVER DIMENSIONS


LUTRON



CASE TYPE K

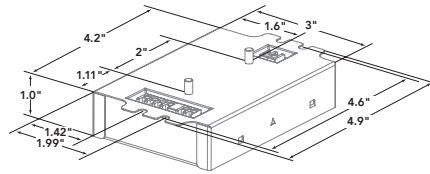


K CASE CONNECTOR LOCATIONS
(WITH STUDS)




KN CASE SIDE ENTRY CONNECTOR LOCATIONS
(WITHOUT STUDS)



CASE TYPE M

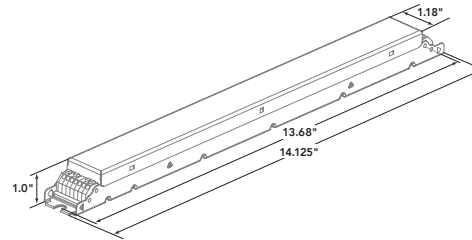


LVD

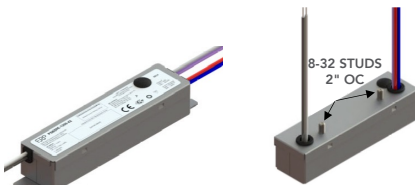


M CASE

K CASE

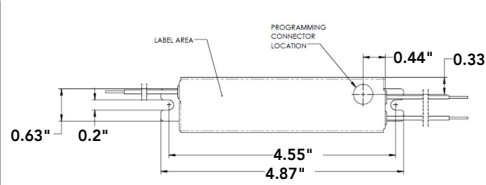

M CASE

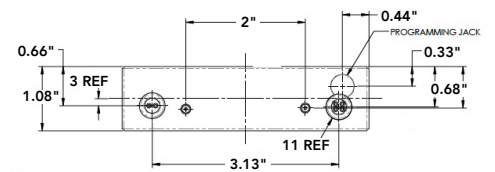


K CASE




KN CASE
25W SYSTEM MAX

KN CASE
26W-60W SYSTEM MAX




KN CASE 25W SYSTEM MAX






KN CASE 26W-60W SYSTEM WATTAGE

NOTE IT IS IMPORTANT THAT LVD DRIVERS ARE MOUNTED TO A FLAT SURFACE IN ORDER TO MAXIMIZE SERVICE LIFE


10V

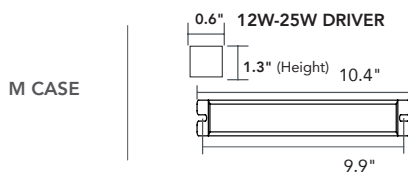

M CASE

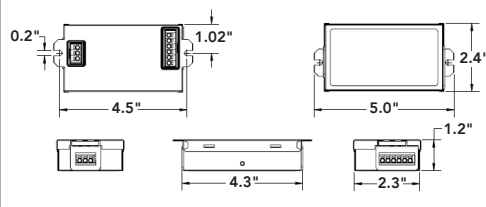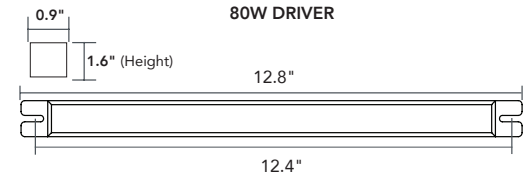


KN CASE

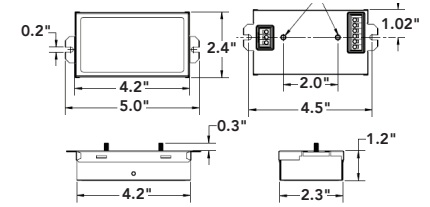

K CASE



MOST COMMON FIXTURE TYPES

CEILING / TROFFER	LINEAR STRIP	SURFACE MOUNT
		



FOR MORE INFORMATION VISIT C-FLEXRETROFITS.COM OR CONTACT US