


4

3

DWG NO. 1000089 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

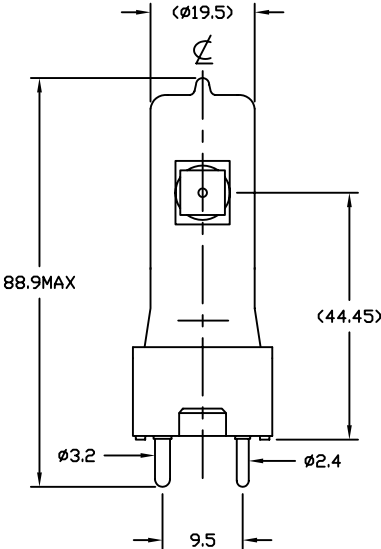

- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	625 W
BULB FINISH	CLEAR
COLOR TEMP.	3350 K
BASE TYPE	GY9.5
AVERAGE LIFE	75 HRS
FILAMENT TYPE	CC-13D
BURN POSITION	BD/Hor

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING	CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630			
	APPROVALS					DATE
	DRAWN R.AMPARO	08/31/99				
	CHKD D.GILCZYNSKI	08/31/99	TITLE			
	ENGR		BVE			
	MFG		JCS120V-625W			
	QUAL		SIZE			
	DSGN ACTVY		CODE IDENT NO.			
	GOVT ACTVY		DWG NO.			
	MATERIAL			1000089		
COMPOSITE			B			
FINISH			BVE			
		SCALE		WEIGHT		
		NONE		SHEET		
				1 OF 1		

4

3

2

1

CAD