


4

3

DWG NO. 1000091 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

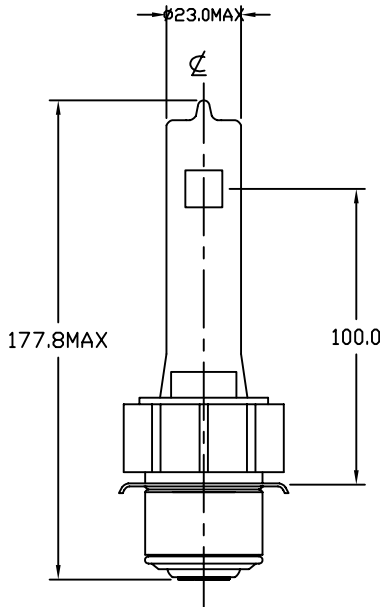

- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	1000 W
COLOR TEMP.	3050 K
TOTAL LUMEN	23000 Lm
BASE TYPE	P40S
AVERAGE LIFE	500 HRS
FILAMENT TYPE	C-13D
BURN POSITION	Any

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± 3 .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING	CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630		
	APPROVALS		DATE		
	DRAWN	R.AMPARO	08/30/99		
	CHKD	D.GILCZYNSKI	08/30/99		
	ENGR			TITLE	
MATERIAL COMPOSITE	MFG			BVT JCS120V-1000WBP40	
	QUAL			SIZE	CODE IDENT NO.
	DSGN ACTVY			B	BVT
FINISH			DWG NO.		1000091
	GOVT ACTVY			SCALE	WEIGHT
				NONE	SHEET 1 OF 1

4

3

2

1

CAD