


4

5

DWG NO. 1000093 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

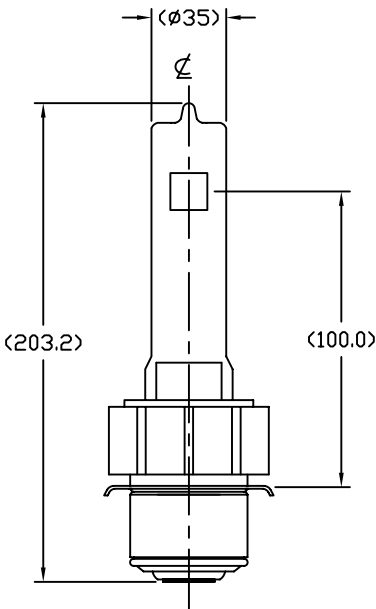

- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	2000 W
COLOR TEMP.	3200 K
TOTAL LUMEN	57500 Lm
BASE TYPE	P40S
AVERAGE LIFE	300 HRS
FILAMENT TYPE	C-13
BURN POSITION	ANY

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DATE		
			DRAWN R.AMPARO		
			CHKD D.GILCZYNSKI		
MATERIAL COMPOSITE			ENGR		
			MFG		
			QUAL		
FINISH			DSGN ACTVY		
			GOVT ACTVY		
			TITLE		
			USHIO AMERICA, INC.		
			5440 Cerritos Avenue Cypress, CA 90630		
			SIZE B		
			CODE IDENT NO. BVW		
			DWG NO. 1000093		
			SCALE NONE		
			WEIGHT		
			SHEET 1 OF 1		

4

3

2

1

CAD