


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

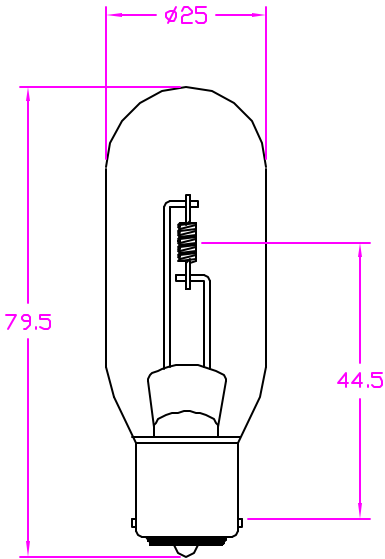

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP; SHOULD BE MAINTAINED BELOW 350°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
RATED VOLTAGE	10 V
AMPERAGE	7.5 A
BULB FINISH	CLEAR
TOTAL LUMENS	1700 Lm
AVERAGE LIFE	100 HRS
BASE TYPE	BA15s
FILAMENT TYPE	C-8
BURNING POSITION	BD

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10307 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Ave. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	05/25/01	TITLE BXE, INC10V-7.5A INCANDESCENT LAMP	
		CHKD	J.COOPER	05/25/01		
		ENGR				
		MFG				
		QUAL				
MATERIAL		SIZE		CODE IDENT NO.	DWG NO.	
COMPOSITE		B		BXE	1000100	
FINISH		DSGN ACTVY				
		GOVT ACTVY		SCALE	WEIGHT	SHEET
				NONE		1 OF 1