


4

5

DWG NO. 1000122 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

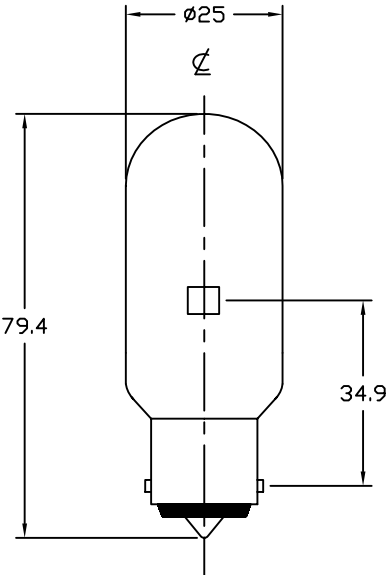

- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	50 W
COLOR TEMP.	2900 K
TOTAL LUMEN	775 Lm
BASE TYPE	BA15D
AVERAGE LIFE	50 HRS
FILAMENT TYPE	CC-13
BURN POSITION	BD

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DATE		
			DRAWN R.AMPARO		
			CHKD D.GILCZYNSKI		
MATERIAL COMPOSITE			ENGR		
			MFG		
			QUAL		
			DSGN ACTVY		
			GOVT ACTVY		
FINISH			TITLE		
			USHIO AMERICA, INC.		
			5440 Cerritos Avenue Cypress, CA 90630		
			CAX/CAW		
			INC120V-50W		
APPLICATION			SIZE	CODE IDENT NO.	DWG NO.
			B	CAX	1000122
			SCALE	NONE	WEIGHT
			SHEET		1 OF 1
			CAD		

4

3

2

1

CAD