

PROJECT NAME: \_\_\_\_\_

CAT. #: \_\_\_\_\_

NOTES: \_\_\_\_\_

FIXTURE SCHEDULE: \_\_\_\_\_

## Dusk to Dawn Night Light Gen 2



### Product Description:

MaxLite's LED Dusk to Dawn Night Light is the easy and energy-saving way to light your home at night. This plug-in night light features a dusk-to-dawn sensor that automatically turns the light on at night and off during the day. The compact size is perfect for adding small amounts of light to closets, bathrooms and hallways.

### Ordering Structure:


ORDER CODE	MODEL NUMBER
111559	UNL-DTDS-G2

### Dimensions:

MODEL NUMBER	L	W	H
UNL-DTDS-G2	3.50"	1.34"	1.39"

### Specifications

	UNL-DTDS-G2
Maximum Input Voltage	120 VAC
Nominal Input Frequency	60Hz
Watts	0.3W LED
Maximum Line Current (amps)	15A
Color Temperature	3000K
Lumen Output	≥4 lm
Efficacy	≥20 lm/W
CRI	≥60
Housing	ABS Plastic V-0
Diffuser	Polycarbonate, V-2
Certification/Standard	ETL Listed
Operating Temperature	32°F to 104°F
Environment	Indoor/ Dry location

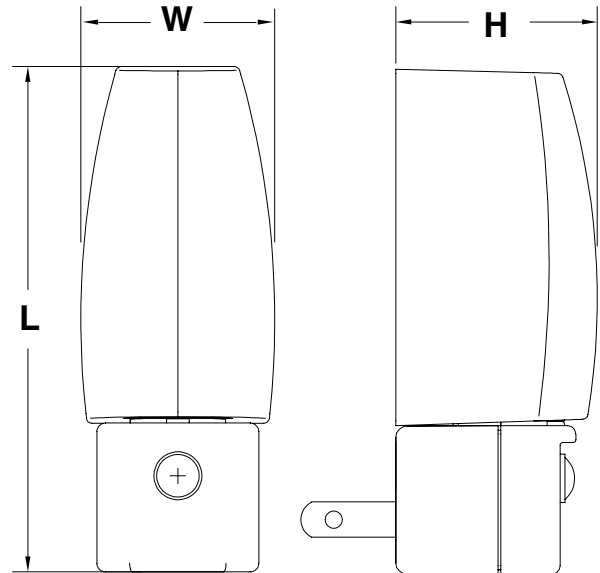

### FCC Statement:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: —Reorient or relocate the receiving antenna. —Increase separation between the equipment and receiver. —Connect the equipment into an outlet or circuit different from that to which the receiver is connected. —Consult the dealer or an experienced radio/TV technician for help.



**1-year standard warranty** (further details available at [www.maxlite.com/warranties](http://www.maxlite.com/warranties))