

4


3

DWG NO. 3000053 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

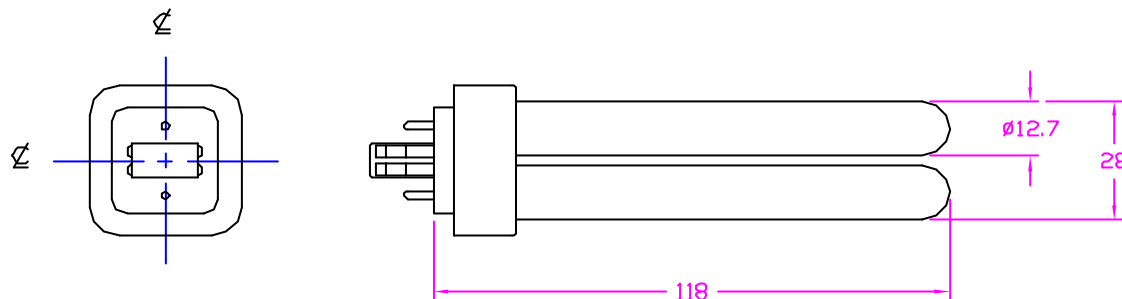

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS

VOLTAGE	59 V
WATTAGE	13 W
CURRENT	0.285 A
COLOR TEMP	3500 K
CRI	82
LUMENS	780 Lm
ANSI SHAPE	T-4 DOUBLE TUBE
BASE TYPE	CAP TYPE-GX23-2
AVE. LIFE	10,000 HRS
ENVELOPE DIA	12.7
BURN POSITION	ANY

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DRAWN	R.AMPARO	03/06/01
			CHKD	K.CORDERO	03/06/01
			ENGR		
MATERIAL COMPOSITE			MFG		
			QUAL		
FINISH			DSGN ACTVY		
			GOVT ACTVY		
NEXT ASSY			USED ON		
			APPLICATION		
			SCALE	NONE	WEIGHT
			SIZE	B	CODE IDENT NO.
			DATE	03/06/01	DWG NO.
			TITLE	UFL-CF13D/835 COMPACT FLUORESCENT	3000053
			SHEET	1 OF 1	

USHIO AMERICA, INC.

10550 Camden Dr. Cypress, CA 90630

UFL-CF13D/835
COMPACT FLUORESCENT

3000053

1 OF 1

4

3

2

1

CAD