



CLQ18WH/8XX-EB

Std. Pack Qty.	50
Order Code	CLQ18WH/8XX-EB

PRODUCT SPECIFICATION

COMPACT LED RETROFIT BULB


GENERAL CHARACTERISTICS

Lamp Type	Compact LED Retrofit Ballast Compatible Bulb
Voltage	120-277V, or 347V (Depend on Ballast Spec)
Base	G24q
Lamp Wattage	9
System Wattage	12
Rated Avg. Life (hrs)	50,000
Replacement	18W, 26W, 32W, 42W CFQ

DIMENSIONS

Overall Length (inches) (D)	6.65
Base Face to Top of Lamp (inches) (C)	6.06
Front (inches) (A)	1.1
Side (inches) (B)	1.1

Dimension Layout

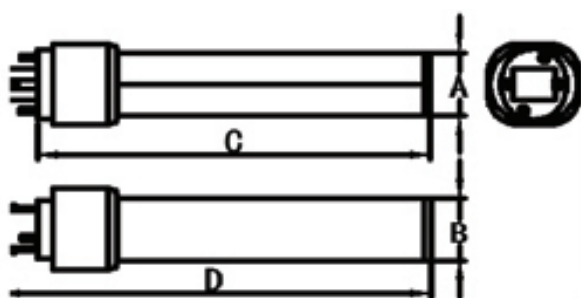

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1000
Beam Angle	120Å°
Color Temperature	2700, 3000K, 3500K, 4000K, 5000K
Color Rendering Index (CRI)	82

FEATURES

- Comply with UL 1993, UL8750
- Comply with FCC 47 Part 15 Class B
- Work with electronic ballast (instant start, rapid start and program start)
- No UV, No Mercury
- Quick Installation
- High Lumen
- Extended Life
- High Quality Color Rendering
- Five Year Limited Warranty