

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE — The CPX Series LED is a low-glare panel featuring an external driver. This cost-effective, reliable panel is visually comfortable and can be recessed mounted. Suitable for many applications such as schools, offices, retail, convenience stores, and other commercial spaces. Certain airborne contaminants can diminish integrity of acrylic. [Click here for Acrylic Environmental Compatibility table for suitable uses.](#) **U.S. Patent No. 10,681,784.**

CONSTRUCTION — The extruded aluminum frame with satin white lens provides excellent shielding and uniform luminance. CPX's low-profile design provides increased installation flexibility especially in restricted plenum spaces. The back plate includes integral T-bar clips for installation into T-grid ceilings.

ELECTRICAL — Long-life LEDs, coupled with a high-efficiency driver, provide superior illumination for extended service life. Greater than 70% LED lumen maintenance at 50,000 hours (L70>50,000). 0-10V dimming driver, dims to 10% and contains non-isolated dimming leads.

LISTINGS — Pending Certification. Damp location listed. IC rated.


DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice

CPX LED

LED Panel




ORDERING INFORMATION

Catalog Number	UPC	Description	Lumens	Color Temperature	CRI	Voltage	Wattage	Efficacy	Pallet Qty.
CPX 2X2 3200LM 40K A12 M4	194995100996	2x2 LED Panel with Prismatic Lens	3200	4000K	80	120-277	31.5	102	32
CPX 2X4 4000LM 40K A12 M2	194995101023	2x4 LED Panel with Prismatic Lens	4000	4000K	80	120-277	38.9	103	16

DIMENSIONS

Length: 23.8" (60.5cm)
 Width: 23.8" (60.5cm)
 Depth: 1.7" (4.3cm)
 Weight:
 Unit: 8.8 lbs
 Unit Carton: 10 lbs
 Master Carton: 41.9 lbs

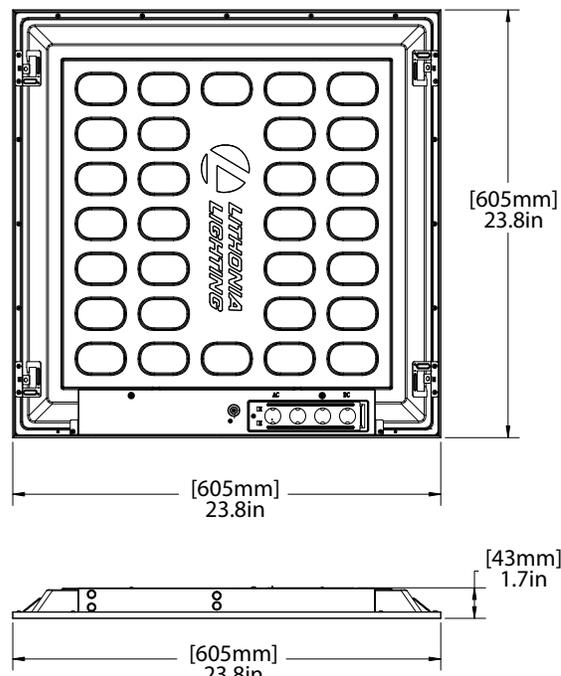

DIMENSIONS

Length: 47.8" (121.4cm)
Width: 23.8" (60.5cm)
Depth: 1.7" (4.3cm)
Weight:
Unit: 16.4 lbs
Unit Carton: 18.6 lbs
Master Carton: 40.5 lbs

