


VC-2S102-FO

Brand Name	MAGNETIC STD
Ballast Type	Magnetic Weatherproof
Starting Method	Rapid Start
Lamp Connection	Series
Input Voltage	277
Input Frequency	60 HZ
Status	Discontinued

Electrical Specifications

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	MAX THD %	Power Factor	Lamp Current Crest Factor	B.E.F .
* F48PG17/VHO	1	116	-20/-29	0.59	137	0.85	35	0.81	1.8	0.62
F48PG17/VHO	2	116	-20/-29	0.89	227	0.85	35	0.93	1.7	0.37
F48T12/VHO	1	116	-20/-29	0.59	137	0.85	35	0.81	1.8	0.62
F48T12/VHO	2	116	-20/-29	0.94	241	0.87	40	0.93	1.7	0.36
F60T12/VHO	1	138	-20/-29	0.65	157	0.86	35	0.87	1.7	0.54
F72PG17/VHO	1	168	-20/-29	0.71	173	0.85	35	0.88	1.8	0.49
F72T12/VHO	1	168	-20/-29	0.69	168	0.87	35	0.88	1.7	0.52
F96PG17/VHO	1	215	50/10	0.81	191	0.84	40	0.85	1.8	0.44
F96T12/VHO	1	215	50/10	0.89	216	0.88	45	0.88	1.7	0.41

Wiring Diagram

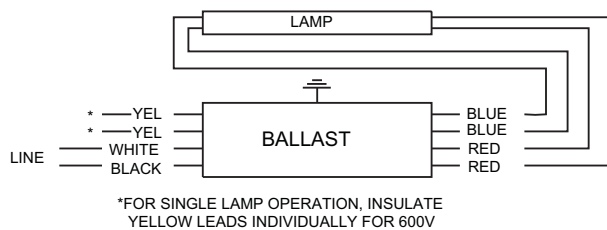


Diag. 39

The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black	6.5	16.5	Yellow/Blue		0
White	6.5	16.5	Blue/White		0
Blue	6.5	16.5	Brown		0
Red	6.5	16.5	Orange		0
Yellow	6.5	16.5	Orange/Black		0
Gray		0	Black/White		0
Violet		0	Red/White		0

Enclosure

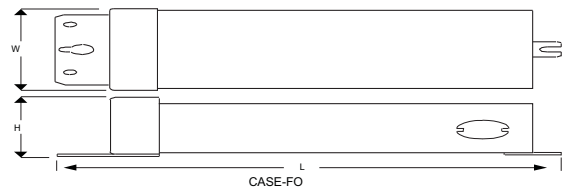

Enclosure Dimensions

OverAll (L)	Width (W)	Height (H)	Mounting (M)
21.0625 "	3.75 "	3 "	20.3125 "
21 1/16"	3 3/4"	3"	20 5/16"
53.5 cm	9.5 cm	7.6 cm	51.6 cm

Revised 10/26/2011

Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.