


JUNO® TASK LINEAR ACCENT

FlexConnect™

Architectural Linear Lighting System

SLW424 Series, Double Populated Wet Location (IP67)

Indoor/Outdoor

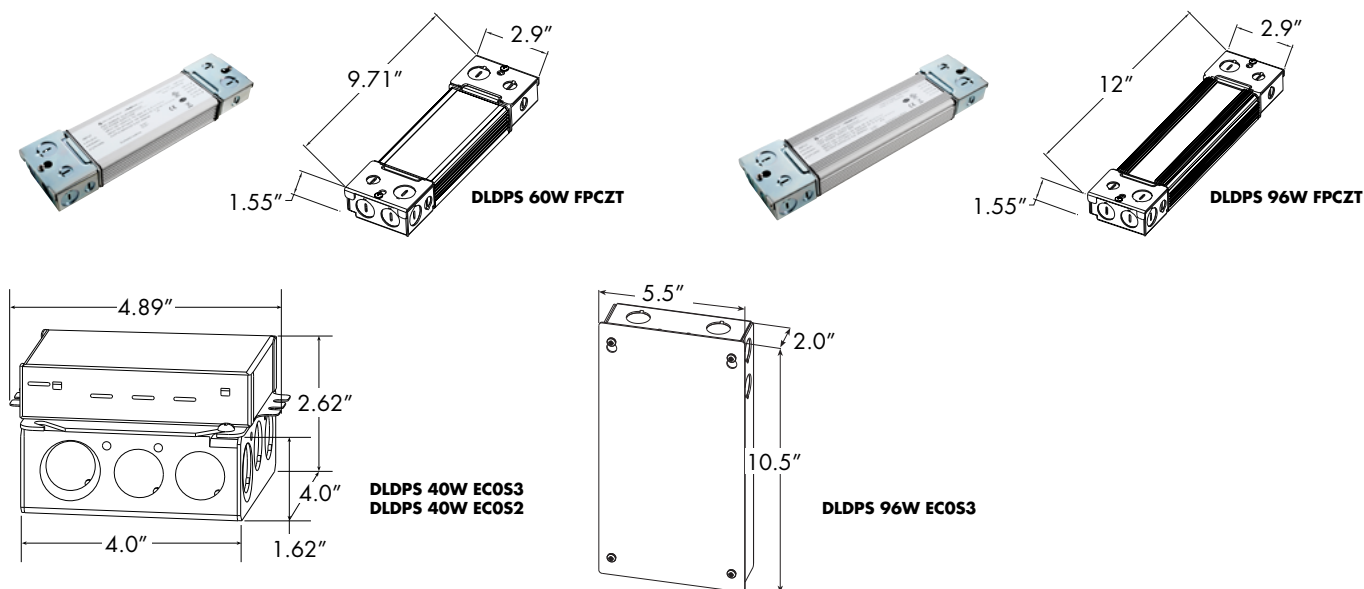

Class 2 Remote LED Driver	Catalog #	Input Voltage	Output Voltage	Max Voltage	Dimming	Min. Dim %
Remote 24VDC Driver	DLDPS 60W FPCZT	120-277 VAC	24VDC	60W	0-10V, ELV, Trac	5%
	DLDPS 96W FPCZT	120-277 VAC	24VDC	96W	0-10V, ELV, Trac	5%
Lutron Hi-Lume, A-series, 3-wire	DLDPS 40W ECOS3	120-277 VAC	24VDC	40W	3-wire & EcoSystem	1%
	DLDPS 96W ECOS3	120-277 VAC	24VDC	96W	3-wire & EcoSystem	0.1%
Lutron Hi-Lume, A-series, 2-wire	DLDPS 40W ECOS2	120 VAC	24VDC	40W	2-wire Forward Phase	1%



Electrical Feeds	Catalog #	Description	Length
Starter Cable	SL101P 36IN	22 AWG, CL2 rated starter cable, rated for in-wall use	36"
	SL101P 144IN	22 AWG, CL2 rated starter cable, rated for in-wall use	144"
Terminal Block, IP67	SLW101TB	One end connects to strip. Accepts 14 to 20 AWG solid/stranded wire, including non-metallic sheathed cable. IP67 Rated.	
	SL102FLX 2IN	22 AWG cable, 2"	2"
Straight Joiner Cables	SL102FLX 6IN	22 AWG, CL2 rated cable, rated for in-wall use	6"
	SL102FLX 12IN	22 AWG, CL2 rated cable, rated for in-wall use	12"
	SL102FLX 36IN	22 AWG, CL2 rated cable, rated for in-wall use	36"
	SL102FLX 72IN	22 AWG, CL2 rated cable, rated for in-wall use	72"
End to End Connector, IP67	SLW102EE	End to End Connector for continuous lit run, IP67	
4-way Connector, IP67	SLW102X	4-way connector, accepts up to 4 strips or 1 feed and 3 strips, IP67	
End Cap, IP67	SLW101EC	End Cap for sealing field cut end of luminaire, IP67	