

# GTX™ City VLA Model LED Signal Modules

8 and 12 inch  
Incandescent look (120V)

## Robust Features

- Optimal thermal management for longer life.
- Provides performance under extreme field temperature conditions.

## Innovative Design

- Low profile module permits efficient installation into existing traffic housings.
- Power consumption levels allow compatibility with most controllers.
- Mask compatible to fit your unique signaling needs.\*

## Outstanding Performance

- High-brightness central light source and custom optical lensing distribute light uniformly and efficiently.
- Rigorously tested for long life design and low maintenance costs.
- Excellent color uniformity.



## Meets Rigorous Certification & Testing Standards

- Intertek ETL Verified compliant.
- Compliant with ITE VTC SH LED Circular Signal Supplement dated June 27<sup>th</sup> 2005.
- CSA approved version available.

\* Sold separately. Refer to masks datasheet TRAF208.



imagination at work




The Greatest Signals Stand the Test of Time.™

# GTX™ City LED Signal Modules

• 8 and 12 inch

## Mechanical Outline Dimensions in inches [mm]

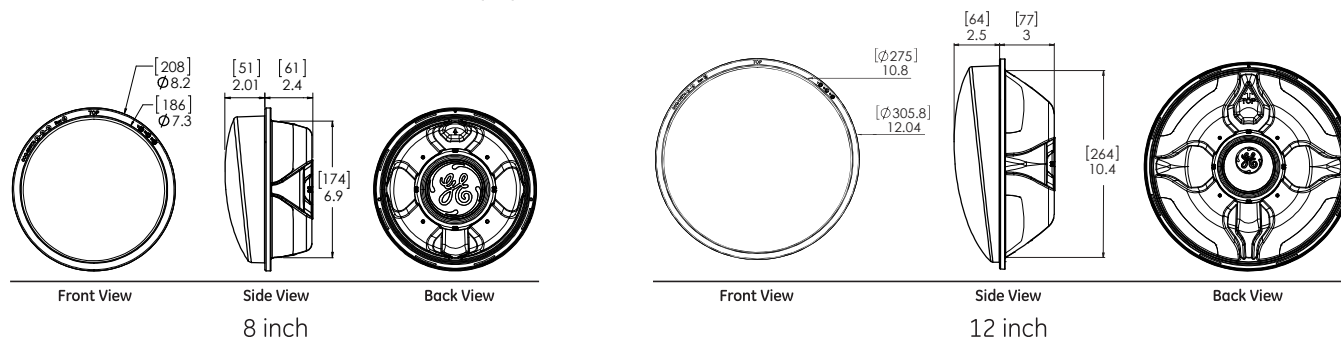

## Design Compliance

Test type	Compliance
Luminous Intensity	ITE VTCSH-LED Circular Signal Supplement -June 2005
Chromaticity	ITE VTCSH-LED Circular -June 2005
Moisture Resistance	Blown Wind Rain MIL-STD-810F method 506.4
Mechanical Vibration	MIL-STD-883 Method 2007
Electronic Noise	FCC Title 47 Sub. B Sec 15 <sup>1</sup>
Transient Voltage Protection	Sec. 2.1.6 NEMA TS2-2003, 300V, 2500W Sec. 2.1.6 NEMA TS2-2003, 600V, 10µF Sec. 2.1.8 NEMA TS2-2003, 1kV, 2Ω
Controller Compatibility	ITE VTCSH-LED Circular Signal Supplement -June 2005
Wiring	NFPA 70, National Electric Code
Transient Suppression	Sec. 8.2 IEC 61000-4-5 & Sec. 6.1.2 ANSI/IEEE C62.41.2 - 2002, 3KV, 2 Ω Sec. 8.0 IEC 61000-4-12 & Sec. 6.1.1 ANSI/IEEE C62.41.2 - 2002, 6KV, 30 Ω

## Operating Specifications

Parameter	Rating
Operating Temperature Range*	-40 to +74°C (-40 to +165°F)
Operating Voltage Range	80 to 135 V (60Hz AC)
Power Factor (PF)	> 90%
Total Harmonic Distortion (THD)	< 20%
Minimum Voltage Turn-Off (VTO)	35 V
Turn-On / Turn-Off Time	< 75 ms
Lens & Shell Material	UV Stabilized Polycarbonate
Wiring	8 in lamp: 40in, 20 AWG, Color Coded with Strain Relief ** 12 in lamp: 40in, 20 AWG, Color Coded with Strain Relief **

\* Operating Temperature Range per ITE 2005, Section 3.3.2

\*\* For CSA approved version : 40in, 18AWG, Color Coded with Strain Relief

## Product Information

Model Number	Front Shell	Size (in)	AC Voltage Nominal	Power (W) Nominal	Wavelength (nm) nominal	Maintained Intensity (Cd) Minimum <sup>2</sup>
DR4-RTFB-VLA	Tinted	8	120V - 60Hz	6.7	628	165
DR4-RCFB-VLA	Clear	8	120V - 60Hz	10.9	588	410
DR4-YZFB-VLA	Tinted	8	120V - 60Hz	7.9	589	410
DR4-YTFB-VLA	Tinted	8	120V - 60Hz	7.3	499	215
DR4-YCFB-VLA	Clear	8	120V - 60Hz	7.3	499	215
DR4-GTFB-VLA	Tinted	8	120V - 60Hz	7.3	499	215
DR4-GCFB-VLA	Clear	8	120V - 60Hz	7.3	499	215
DR6-RTFB-VLA	Tinted	12	120V - 60Hz	6.7	625	365
DR6-RCFB-VLA	Clear	12	120V - 60Hz	10.9	588	910
DR6-YZFB-VLA	Tinted	12	120V - 60Hz	9.9	589	910
DR6-YTFB-VLA	Tinted	12	120V - 60Hz	8.4	501	475
DR6-YCFB-VLA	Clear	12	120V - 60Hz	8.4	501	475
DR6-GTFB-VLA	Tinted	12	120V - 60Hz	8.4	501	475
DR6-GCFB-VLA	Clear	12	120V - 60Hz	8.4	501	475

Standard product equipped with universal connectors (insulated spade-quick disconnect).

All colors available in tinted or clear lens.

<sup>1</sup> Class A

<sup>2</sup> Measured at vertical angle of -2.5° and at horizontal angle of 0°.

Distributed by:



GE Lighting • 1-888-MY-GE-LED • www.gelighting.com

1 - 8 8 8 - 6 9 - 4 3 - 5 3 3 for North America · or · + 1 . 2 1 6 . 2 6 6 . 2 4 1 9

GE Lighting Solutions, LLC is a subsidiary of the General Electric Company. "The Greatest Signals Stand the Test of Time" are trademarks of GE Lighting, LLC. The GE brand and logo are trademarks of the General Electric Company. © 2014 GE Lighting, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

TRAF282-R120314