


VH-1B9-TP-W

Brand Name	COMPACT-HPF
Ballast Type	Magnetic
Starting Method	Pre-Heat
Lamp Connection	Series
Input Voltage	277
Input Frequency	60 HZ
Status	Active

Electrical Specifications

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Starting Current (Amps)	Open Circuit (Amps)	Input Power (Watts)	Ballast Factor	MAX THD %	Power Factor
* CFQ9W/G23	1	9	0/-18	0.05	0.18	0.17	15	0.95	35	0.95
CFT5W/G23	1	5	0/-18	0.05	0.18	0.17	11	0.95	50	0.82
CFT7W/G23	1	7	0/-18	0.05	0.18	0.17	12	0.93	45	0.84
CFT9W/G23	1	9	0/-18	0.05	0.18	0.17	12	0.94	35	0.89

Wiring Diagram

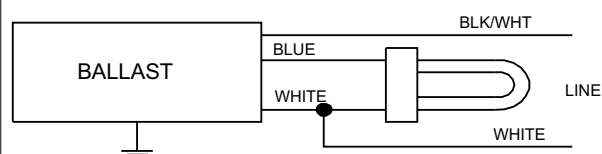


Diag. 47

The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black		0	Yellow/Blue		0
White	15	38.1	Blue/White		0
Blue	15	38.1	Brown		0
Red		0	Orange		0
Yellow		0	Orange/Black		0
Gray		0	Black/White	15	38.1
Violet		0	Red/White		0

Enclosure

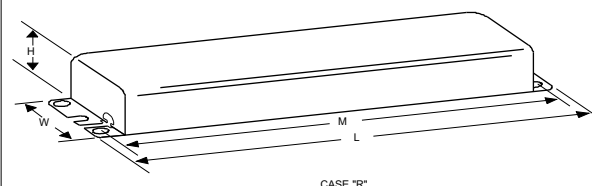

Enclosure Dimensions

OverAll (L)	Width (std)/(TP)	Height (H)	Mounting (M)
4.75 "	2.21875 "/0 "	1.625 "	4.375 "
4 3/4	2 7/32 / 0	1 5/8	4 3/8
12.1 cm	5.6 cm / 0 cm	4.1 cm	11.1 cm

Revised 07/01/1999



Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.