


Electrical Specifications

VLO-13-TP

Brand Name	COMPACT-OPEN
Ballast Type	Magnetic
Starting Method	Pre-Heat
Lamp Connection	Series
Input Voltage	277
Input Frequency	60 HZ
Status	Active

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Starting Current (Amps)	Open Circuit (Amps)	Input Power (Watts)	Ballast Factor	MAX THD %	Power Factor
* CFQ13W/GX23	1	13	32/00	0.30	0.35	0.00	21	1.00	05	0.27
CFQ26W/G24D	1	26	50/10	0.27	0.35	0.00	29	0.80	10	0.41
CFT13W/GX23	1	13	32/00	0.30	0.35	0.00	22	1.00	10	0.26

Wiring Diagram

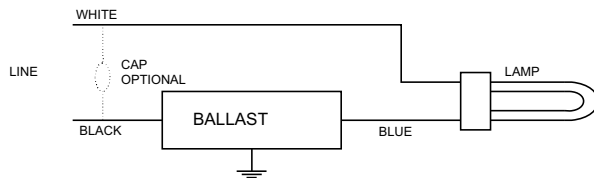

Diag. 140

The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black	15	38.1	Yellow/Blue		0
White		0	Blue/White		0
Blue	15	38.1	Brown		0
Red		0	Orange		0
Yellow		0	Orange/Black		0
Gray		0	Black/White		0
Violet		0	Red/White		0

Enclosure

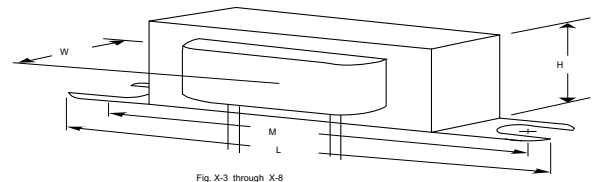


Fig. X-3 through X-8

Enclosure Dimensions

OverAll (L)	Width (std)/(TP)	Height (H)	Mounting (M)
3.25 "	1.50 "/1.75 "	2.0 "	2.8125 "
3 1/4	1 1/2 / 1 3/4	2	2 13/16
8.3 cm	3.8 cm / 4.4 cm	5.1 cm	7.1 cm

Revised 09/14/1999



Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.