

Fc2 Lampholders

For discharge lamps with base Fc2

If the lampholders are used for lamps with ignition voltage max. 20 kV the luminaire manufacturer is responsible for sufficient creepage distances and clearances.

Fc2 lampholder

Casing: ceramic, T250

Nominal rating: 10/500/5 kV

Contacts: Ni

Lead: Cu tinned, stranded conductors 1 mm²,


Si-insulation max. Ø 3.6 mm, length: 300 mm

Fixing holes for screws M4

Weight: 100 g, unit: 200 pcs.

Type: 02500

Ref. No.: 108937

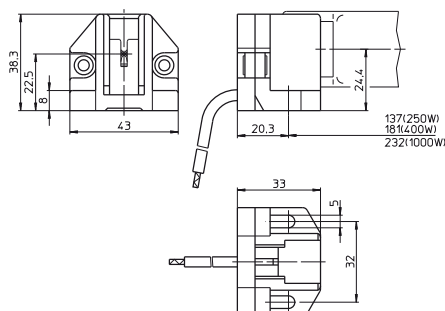

Fc2 lampholder

Casing: ceramic, T250

Nominal rating: 10/250/5 kV, contacts: Ni

Lead: Cu tinned, stranded conductors 1 mm²,



Si-insulation max. Ø 3.6 mm, length: 300 mm

Fixing screws M4, captive

Weight: 102 g, unit: 25 pcs.

Type: 02574 rigid fixing

Ref. No.: 100096

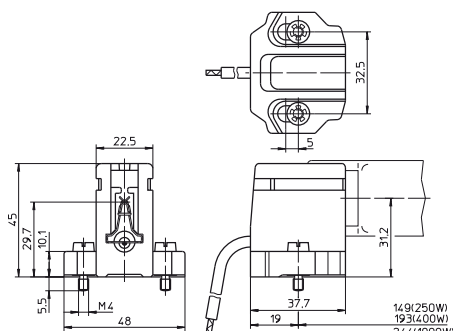

Fc2 lampholder

Casing: ceramic, T250

Nominal rating: 10/250/5 kV, contacts: Ni

Lead: Cu tinned, stranded conductors 1 mm²,



Si-insulation max. Ø 3.6 mm, length: 300 mm

Fixing screws M4, captive

Weight: 102 g, unit: 25 pcs.

Type: 02575 adjustable fixing

Ref. No.: 100098

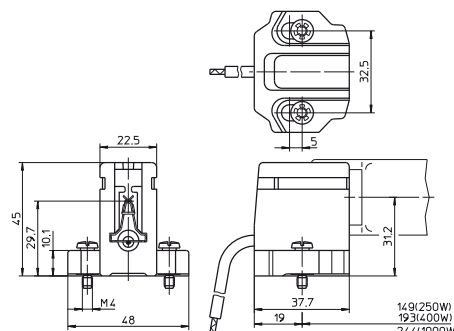

Fc2 lampholder

Casing: ceramic, T250

Nominal rating: 10/250/20 kV, contacts: Ni

Lead: Cu tinned, stranded conductors 1 mm²,

Si-insulation with spun glass filler Ø 7 mm,

for ignition voltage: max. 20 kV,

length: 500 mm

Fixing screws M4, captive

Weight: 120 g, unit: 25 pcs.

Type: 02525 rigid fixing

Ref. No.: 100082

