

Snap-in lampholder for T8 and T12 lamps
Lamp axis: 25mm (0.984")

Casing: PC, white

Push-In terminals: 18AWG


Snap-in foot for wall thickness
0.4–1mm (0.016–0.039")

Side and bottom wire entry

Weight: 6g, packing qty.: 500 pcs.

Type: 28921

Ref. No.: 108438

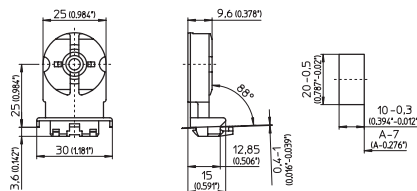

UL US
E110363

Snap-in lampholder/starter combination
for T8 lamps, with starter attachment
Lamp axis: 25mm (0.984")

Casing: PC, white

Push-In twin terminals: 18AWG


Snap-in foot for wall thickness
0.4–1mm (0.016–0.039")

Side and bottom wire entry

Weight: 8.5g, packing qty.: 500 pcs.

Type: 28920

Ref. No.: 108437

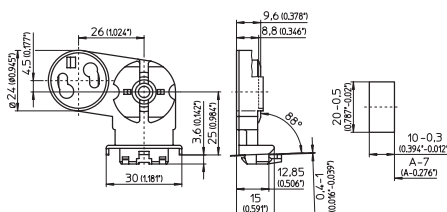

UL US
E110363

Snap-in lampholder for T8 and T12 lamps
Lamp axis: 51mm (2.008")

Casing: PC, white

Push-In twin terminals: 18AWG


Snap-in foot for wall thickness
0.5–1mm (0.020–0.039")

Side entry wiring or through bracket foot

Weight: 10g, packing qty.: 500 pcs.

Type: 47520

Ref. No.: 101758

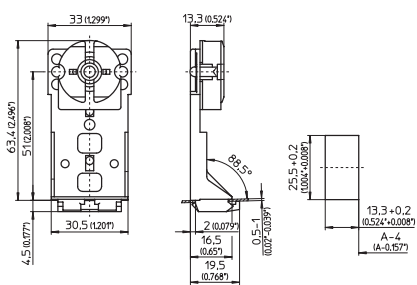

UL US
E110363

Snap-in lampholder/starter combination
for T8 and T12 lamps, with starter attachment
Lamp axis: 51mm (2.008")

Casing: PC, white

Push-In terminals: 18AWG


Snap-in foot for wall thickness
0.5–1mm (0.020–0.039")

Side entry wiring or through bracket foot

Weight: 14g, packing qty.: 500 pcs.

Type: 47620

Ref. No.: 101777

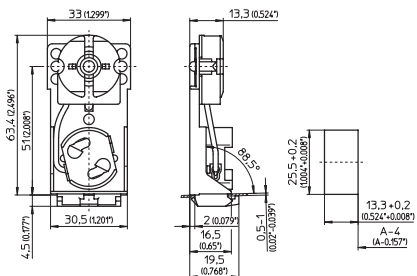

UL US
E110363