

Features

- High Efficiency (Up to 90%)
- Active Power Factor Correction (Up to 0.99)
- Constant Current Output
- Lightning Protection
- All-Round Protection: OVP, SCP, OTP
- Waterproof (IP67) and Damp & Wet Location



Description

The EUC-060SxxxST Series operate from a 90 ~ 305 Vac input range. They are designed to be highly efficient and highly reliable. Features include over voltage protection, short circuit protection and over temperature protection.

Models

Output Current	Input Voltage Range	Output Voltage Range	Max. Output Power	Typical Efficiency (2)	Power Factor		Model Number (3)
					120Vac	220Vac	
350 mA (1)	90 ~ 305 Vac	85~170 Vdc	60 W	90%	0.99	0.95	EUC-060S035ST (4)★
450 mA (1)	90 ~ 305 Vac	67~134 Vdc	60 W	90%	0.99	0.95	EUC-060S045ST (4)
700 mA (1)	90 ~ 305 Vac	43 ~86 Vdc	60 W	90%	0.99	0.95	EUC-060S070ST (4)★
1050 mA (1)	90 ~ 305 Vac	29 ~58 Vdc	60 W	89%	0.99	0.95	EUC-060S105ST (4)★
1400 mA (1)	90 ~ 305 Vac	21 ~43 Vdc	60 W	89%	0.99	0.95	EUC-060S140ST (5)★
1700 mA (1)	90 ~ 305 Vac	18 ~36 Vdc	60 W	89%	0.99	0.95	EUC-060S170ST (6)★
2300 mA (1)	90 ~ 305 Vac	13 ~27 Vdc	60 W	88%	0.99	0.95	EUC-060S230ST (6)★
3300 mA (1)	90 ~ 305 Vac	9 ~18 Vdc	60 W	88%	0.99	0.95	EUC-060S330ST (6)
5000 mA	90 ~ 305 Vac	6 ~12 Vdc	60 W	87%	0.99	0.95	EUC-060S500ST (6)

- Notes:**
- (1) The output current is adjustable at factory from 50% to 100%.
 - (2) Measured at full load and 220 Vac input.
 - (3) A suffix –xxxx may be added to denote variations or modifications to the base product, where x can be any alphanumeric character or blank.
 - (4) Non-Class 2 output (USR & CNR).
 - (5) Class 2 output (USR), Non-Class 2 output (CNR).
 - (6) Class 2 output (USR & CNR).
 - (7) ★: Popular model.

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	90 V	-	305 V	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	1 mA	At 277Vac 60Hz input

Specifications are subject to changes without notice.

Input Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Input AC Current	-	-	0.8 A	Measured at full load and 100 Vac input.
	-	-	0.36 A	Measured at full load and 220 Vac input.
Inrush Current	-	-	60 A	At 230Vac input 25°C Cold Start

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%	-	5%	
Ripple and Noise (pk-pk)	-	-	5% V _O	Measured by 20 MHz bandwidth oscilloscope and the output paralleled a 0.1 uF ceramic capacitor and a 10 uF electrolytic capacitor.
Line Regulation	-	-	1%	
Load Regulation	-	-	3%	
Turn-on Delay Time	-	0.8 s	1.2 s	Measured at 120Vac input.
	-	0.4 s	0.6 s	Measured at 220Vac input.

Note: All specifications are typical at 25 °C unless otherwise stated.

Protection Functions

Parameter	Min.	Typ.	Max.	Notes
Over Voltage Protection I _O = 350 mA I _O = 450 mA I _O = 700 mA I _O = 1050 mA I _O = 1400 mA I _O = 1700 mA I _O = 2300 mA I _O = 3300 mA I _O = 5000 mA	- - - - - - - - -	195 V 145 V 92 V 65 V 50 V 42 V 31 V 22 V 15 V	215 V 160 V 102 V 70 V 55 V 45 V 38 V 25 V 17 V	Latch mode. The power supply shall return to normal operation only after the power is turn-on again.
Over Temperature Protection	-	110 °C	-	Latch mode. The power supply shall return to normal operation only after the power is turn-on again.
Short Circuit Protection	No damage shall occur when any output operating in a short circuit condition. The power supply shall be self-recovery when the fault condition is removed.			

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency I _O = 350 mA I _O = 450 mA I _O = 700 mA I _O = 1050 mA I _O = 1400 mA I _O = 1700 mA I _O = 2300 mA I _O = 3300 mA I _O = 5000 mA	86%	88%	-	Measured at full load, 120Vac input, 25°C ambient temperature, after the unit is thermally stabilized.
	86%	88%	-	
	86%	88%	-	
	85%	87%	-	It will be lower about 2%, if measured immediately after startup.
	85%	87%	-	
	85%	87%	-	
	84%	86%	-	
	84%	86%	-	
	83%	85%	-	

Specifications are subject to changes without notice.

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Efficiency				
$I_o = 350 \text{ mA}$	88%	90%	-	Measured at full load, 220Vac input, 25°C ambient temperature, after the unit is thermally stabilized.
$I_o = 450 \text{ mA}$	88%	90%	-	
$I_o = 700 \text{ mA}$	88%	90%	-	
$I_o = 1050 \text{ mA}$	87%	89%	-	
$I_o = 1400 \text{ mA}$	87%	89%	-	
$I_o = 1700 \text{ mA}$	87%	89%	-	It will be lower about 2%, if measured immediately after startup.
$I_o = 2300 \text{ mA}$	86%	88%	-	
$I_o = 3300 \text{ mA}$	86%	88%	-	
$I_o = 5000 \text{ mA}$	85%	87%	-	
MTBF	-	367,000 hours	-	Measured at 120Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Life Time				
$I_o = 2300 \text{ mA}$	112,800 hours			Measured at 120Vac input, 80%Load; Case temperature=60°C @ Tc point. See life time vs. Tc curve for the details
$I_o = 5000 \text{ mA}$	66,500 hours			
Case Temperature	-	-	88 °C	2300 mA;3300 mA : 90°C
Dimensions				
Inches (L × W × H)	5.91 × 2.66 × 1.44			
Millimeters (L × W × H)	150 × 67.5 × 36.5			
Net Weight	-	750 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes
Operating Temperature	-35°C	-	+70 °C	Humidity: 10% RH to 100% RH See Derating Curve for more details
Storage Temperature	-40 °C	-	+85 °C	Humidity: 5% RH to 100% RH

Safety & EMC Compliance



Safety Category	Standard
UL/CUL	UL8750, UL1012, UL1310 Class 2, CSA-C22.2 No. 107.1, CSA C22.2 NO. 223-M91 Class 2
CE	EN61347-1, EN61347-2-13
EMI Standards	Notes
EN 55015	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS

Specifications are subject to changes without notice.

Safety & EMC Compliance (Continued)


EMS Standards	Notes
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 4 kV, line to earth 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies to Lighting Equipment

Derating Curve

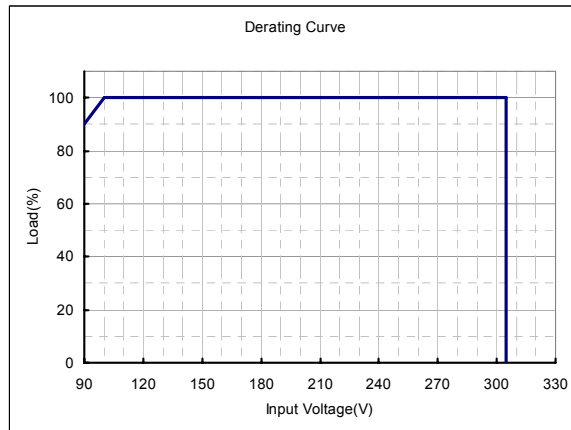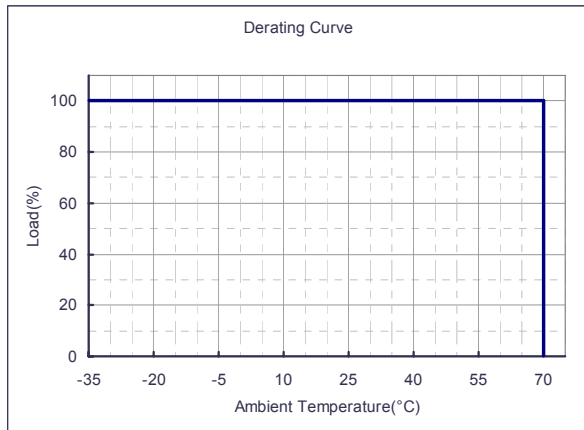


Life time vs. Case Temperature Curve


EUC-060S230ST

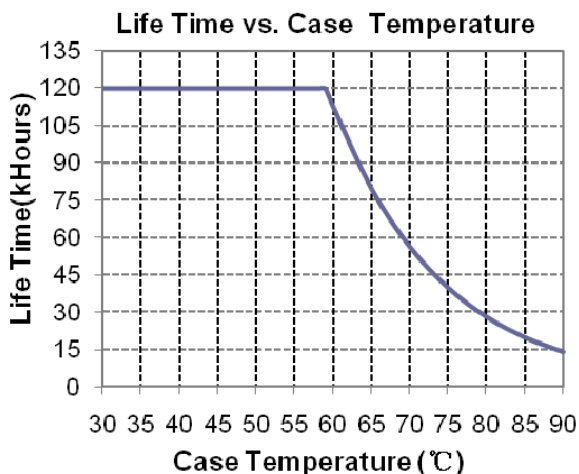

EUC-060S500ST

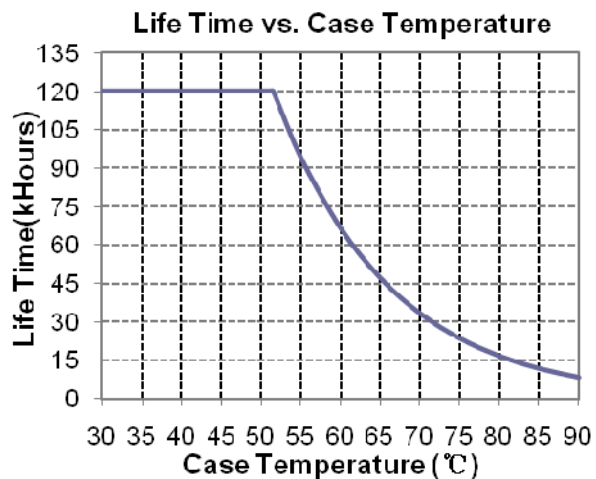

Mechanical Outline

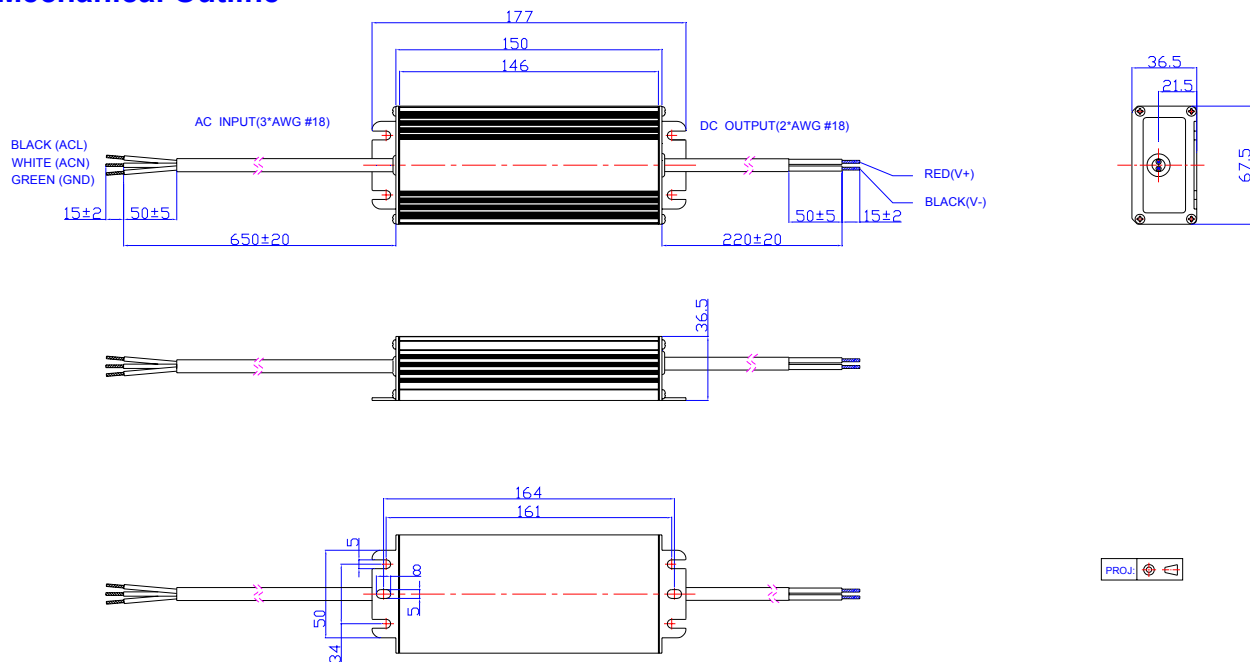

RoHS Compliance

Our products comply with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2009-09-02	V3.1	Change MTBF and Life Time		
2009-09-11	V3.2	Change Turn-on Delay Time		
2009-10-15	A	1. Add notes of UL1310 Class 2 for all models. 2. Change the OVP Value; 3. Change the main value of efficiency; 4. Change the stripper length of all wires to 50mm.		
2009-11-10	B	Change notes of efficiency.		
2009-12-03	C	Add notes: the output current is adjustable at factory from 50% to 100%		
2010-03-03	D	Change Model Note: EUC-060S230ST (4) EUC-060S330ST (4)	(4) (4)	(5) (5)
		Add Leakage Current in Input Specifications	/	/
		Add Derating Curve	/	/
		Modify the tin-plated wire length tolerance in Mechanical Outline	±0.5	±2
2010-05-31	E	Add star rank for recommended models	/	★: Popular model.
		Standardize the tolerance in Mechanical Outline	/	/
2010-08-10	F	Delete Output Overshoot / Undershoot	Max. 10%	/
		Change Turn-on Delay Time 120Vac input	Typ. 0.5S Max. 0.8S	Typ. 0.8S Max. 1.2S
2011-01-14	G	Change popular models	/	/
2011-12-09	H	EUC-060S140ST, EUC-060S170ST	Non Class 2	Class 2
2012-06-10	I	Efficiency I _o = 350 mA I _o = 450 mA I _o = 700 mA I _o = 1050 mA I _o = 1400 mA I _o = 1700 mA I _o = 2300 mA	/	1% Lower
		EN61000-4-5	line to line 2 kV, line to earth 4 kV	line to line 4 kV, line to earth 6 kV
		Life time curve	/	Added
2012-07-05	J	Inrush Current	50 A	60 A
2012-07-17	K	Max Case Temperature	/	Updated
2013-03-12	L	MTBF	/	Typical value updated
		Life time	/	Typical value updated
		Life time curve	/	Updated

Specifications are subject to changes without notice.