

Features

- Ultra High Efficiency (Up to 91.0%)
- Four Channels Output
- Active Power Factor Correction (0.99 Typical)
- Constant Current Output
- Input surge protection: 4kV line-line, 6kV line-earth
- All-Around Protection: SCP, OTP, OVP
- Waterproof (IP67) and UL Dry / Damp / Wet Location
- Class 2 & SELV Output



Description

The *EUC-144QxxxDT(ST)* series is a 144W, four-channel, constant-current LED driver that operates from 90-305 Vac input with excellent power factor. It is created for flood, tunnel and street lights. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, short circuit, and over temperature.

Models

Output Current (1)	Input Voltage Range	Output Voltage Range	Max. Output Power	Typical Efficiency (2)	Power Factor		Model Number
					120Vac	220Vac	
700 mA	90~305 Vac	29~54 Vdc	151 W	91.0%	0.99	0.95	EUC-144Q070DT(ST) ⁽³⁾
1050 mA	90~305 Vac	19~36 Vdc	151 W	90.0%	0.99	0.95	EUC-144Q105DT(ST) ⁽⁴⁾
1400 mA	90~305 Vac	14~25 Vdc	140 W	89.0%	0.99	0.95	EUC-144Q140DT(ST) ⁽⁵⁾

- Notes:** (1) The output current is adjustable at factory from 50% to 100%.
 (2) Measured at full load and 220 Vac input.
 (3) Class 2 output (USR), Non-Class 2 output (CNR)
 (4) Class 2 output (USR), Class 2 output (CNR) for wet location.
 (5) Class 2 output (USR) and Class 2 output (CNR) for wet location.

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage Range	90 V	-	305 V	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.75 MIU	UL8750; 277Vac/ 60Hz , grounding effectively
			0.70 mA	IEC60598-1; 240Vac/ 60Hz, grounding effectively
Input AC Current	-	-	2.1 A	Measured at full load and 100 Vac input.
			0.9 A	Measured at full load and 220 Vac input.
Inrush Current	-	-	65 A	At 220Vac input, 25℃ cold start, duration=1 ms, 10%l _{pk} -10%l _{pk} .
Inrush Current(I ² t)	-	-	1.7 A ² s	

Input Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
PF	0.90	-	-	At 100Vac-220Vac, 50-60Hz, 75%load-100%load
THD	-	-	20%	At 100Vac-277Vac, 50-60Hz, 75%load-100%load

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output channel	-	4	-	
Output Current Tolerance	-5%		5%	
No-load Output Voltage I _O = 700 mA I _O = 1050 mA I _O = 1400 mA	- - -	- - -	- - -	Hiccup mode.
Output Current Ripple (pk-pk)	-	10% I _O	15% I _O	
Output Overshoot / Undershoot	-	-	10%	When power on or off.
Line Regulation	-	-	±1%	
Load Regulation	-	-	±3%	
Turn-on Delay Time	-	1.0 s	2.0 s	Measured at 120Vac input, 75%load-100%load
	-	0.5 s	1.5 s	Measured at 220Vac input, 75%load-100%load
Temperature Coefficient	-	0.02%/°C	-	Case temperature = 0°C ~T _C max

Note: All specifications are typical at 25 °C unless otherwise stated.

Protection Functions

Parameter	Min.	Typ.	Max.	Notes
Over Temperature Protection	-	120 °C	-	When OTP occurs, the output current decreases down to the half of the normal output current. The output shall be auto recovery when case temperature becomes normal.
Short Circuit Protection	Single or dual channel short does not affect the normal work of other channels. The driver recovers after short is removed and AC input recycled. Three or four channel short latches the driver and it recovers after the short is removed.			

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency I _O = 700 mA I _O = 1050 mA I _O = 1400 mA	87.0% 86.0% 85.0%	88.0% 87.0% 86.0%	- - -	Measured at full load, 120Vac input, 25°C ambient temperature, after the unit is thermally stabilized. It will be about 1% lower, if measured immediately after startup.
Efficiency I _O = 700 mA I _O = 1050 mA I _O = 1400 mA	90.0% 89.0% 88.0%	91.0% 90.0% 89.0%	- - -	Measured at full load, 220Vac input, 25°C ambient temperature, after the unit is thermally stabilized. It will be about 1% lower, if measured immediately after startup.

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
MTBF	-	383,000 Hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	95,000 Hours	-	Measured at 220Vac input, 80%Load; Case temperature=60°C @ Tc point. See lifetime vs. Tc curve for the details
Operating Case Temperature for Safety Tc_s	-40°C		90 °C	
Operating Case Temperature for Warranty Tc_w	-40°C		+70 °C	
Storage Temperature	-40°C	-	+85 °C	Humidity: 5% RH to 100% RH
Dimensions Inches (L x W x H) Millimeters (L x W x H)	7.40x 3.46 x 1.50 188 x88 x 38			With mounting ear 8.35x 3.46 x 1.50 212x88 x 38
Net Weight	-	1340 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.


Safety & EMC Compliance

Safety Category	Standard
UL/CUL	UL8750, UL1012, UL1310 Class 2, CSA-C22.2 No. 107.1, CSA C22.2 NO. 223-M91 Class 2
CE	EN 61347-1, EN61347-2-13
EMI Standards	Notes
EN 55015 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
FCC Part 15 ⁽¹⁾	ANSI C63.4 Class B This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired Operation.
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 15 kV air discharge, 8 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 4 kV, line to earth 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test


Safety & EMC Compliance (Continued)

EMS Standards	Notes
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

Derating Curve

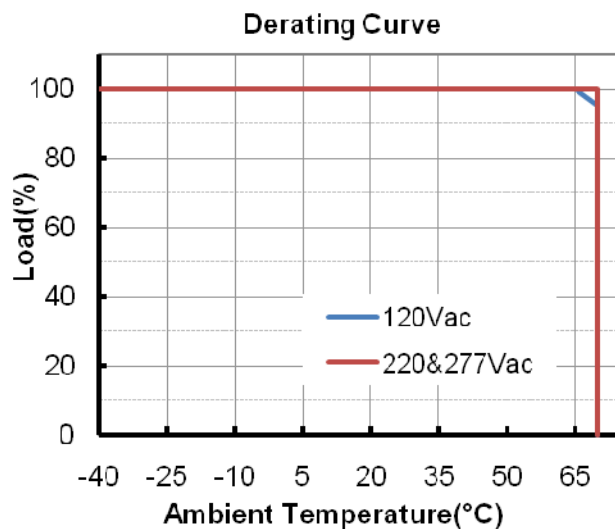


Lifetime vs. Case Temperature Curve

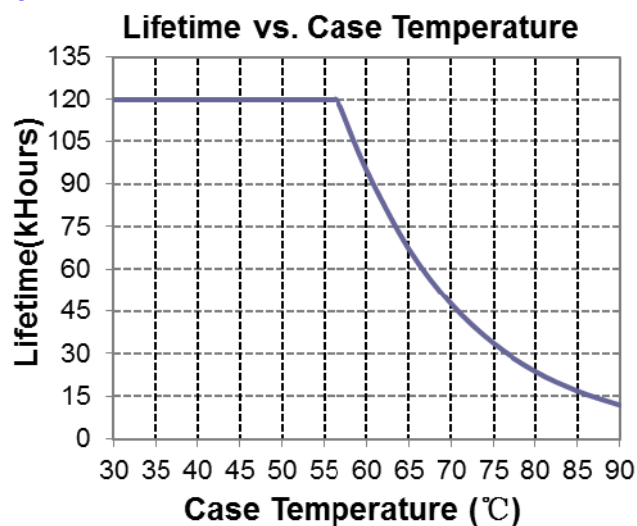


Efficiency vs. Load


EUC-144Q070DT(ST)

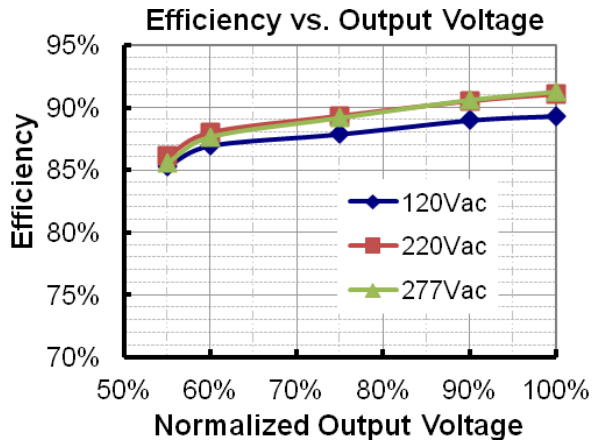


EUC-144Q105DT(ST)

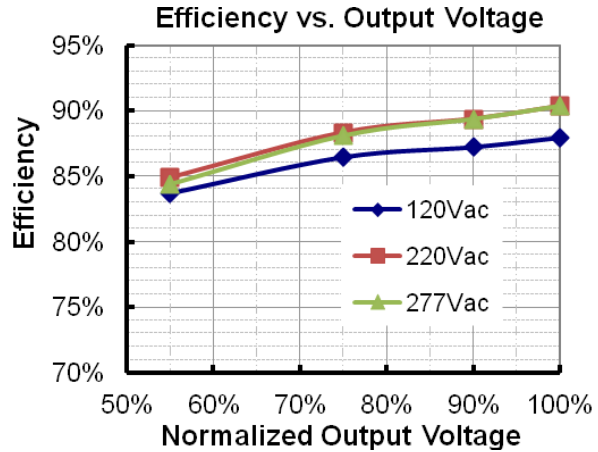


EUC-144Q140DT(ST)

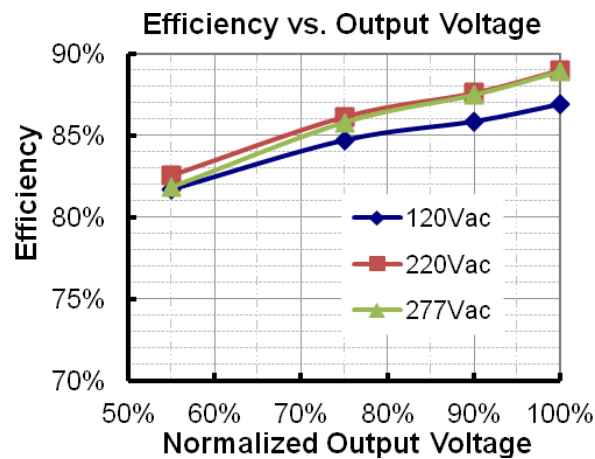

Power Factor Characteristics

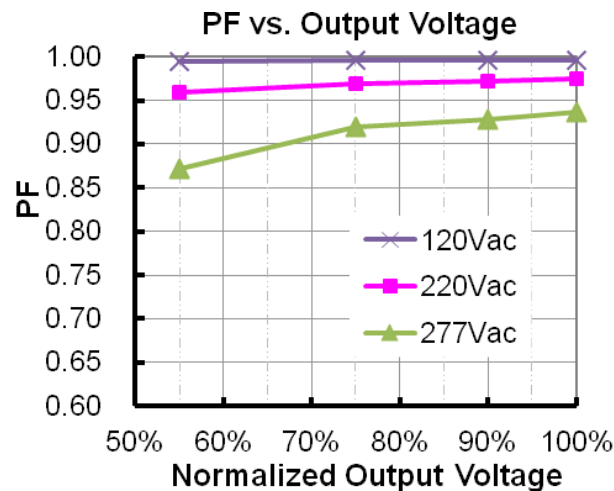


Total Harmonic Distortion

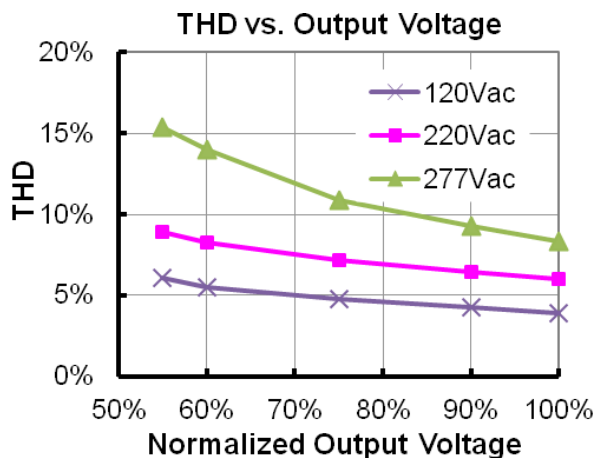

Dimming Control (On secondary side)

Parameter	Min.	Typ.	Max.	Notes
12V output voltage (Vc)	10.8 V	12 V	13.2 V	
12V Output source current	0 mA		20 mA	
Absolute maximum voltage on the 1~10V input pin	0 V	-	12 V	
Source current on 1~10V input pin	0 uA	-	200 uA	

The dimmer control may be operated from either a potentiometer or from an input signal of 1 – 10 Vdc. Two recommended implementations are provided below.

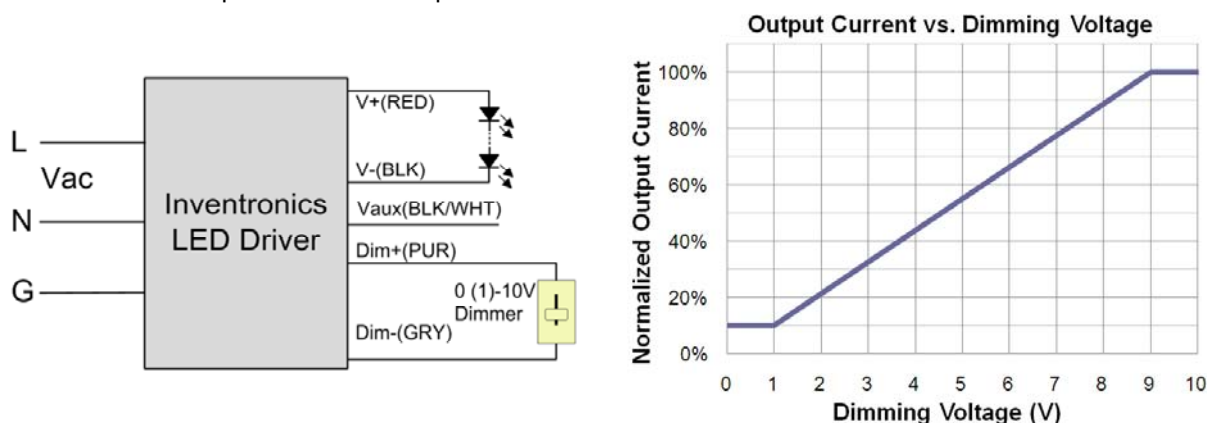

Implementation: DC input


Notes:

1. I_o is actual output current and I_r is rated current without dimming control.
2. For the driver to operate properly, the load voltage must be maintained above the minimum voltage threshold (approx. 60% of the max. output voltage for any given model).
3. If the output voltage is maintained above 60% of the maximum output voltage, the dimming control may be operated over the entire 1-10V range with output current varying from 10% to 100% of I_r .
4. The dimming signal is allowed to be less than 1V, however, when it for 0-1V, the output current is 10% I_o .


5. Do not connect the GND of dimming to the output; otherwise, the LED driver cannot work normally.
6. If 0-10V dimming is not used, Dim + can be either open or connected to Vaux.

Mechanical Outline

EUC-144QxxxDT

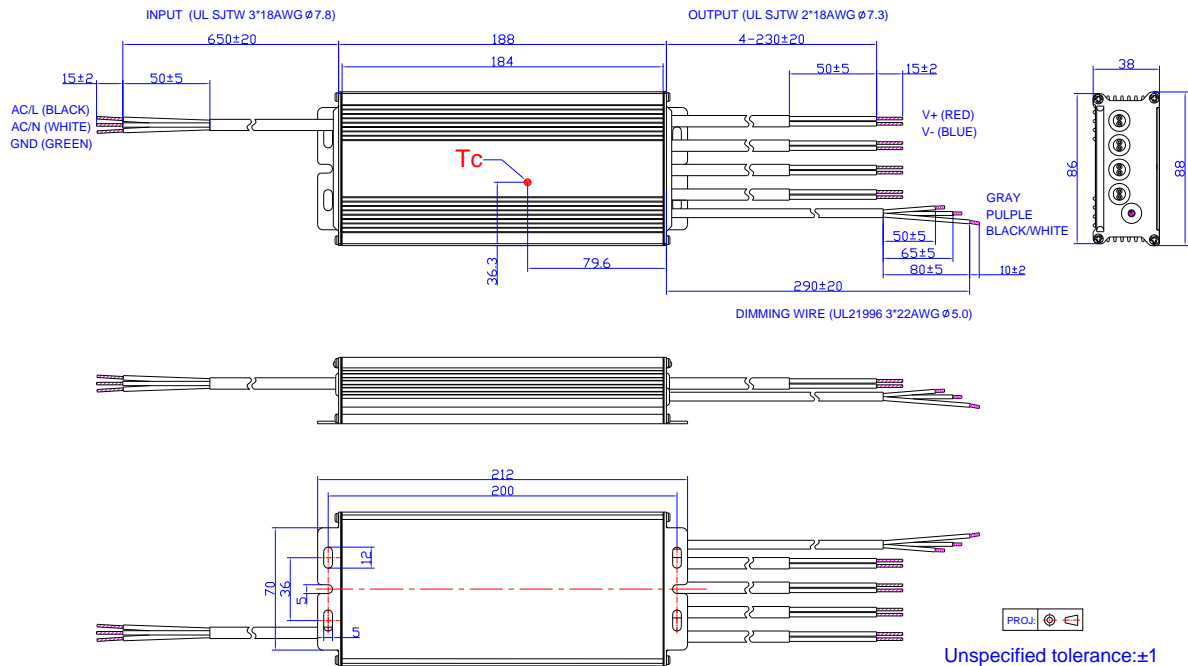

EUC-144QxxxST

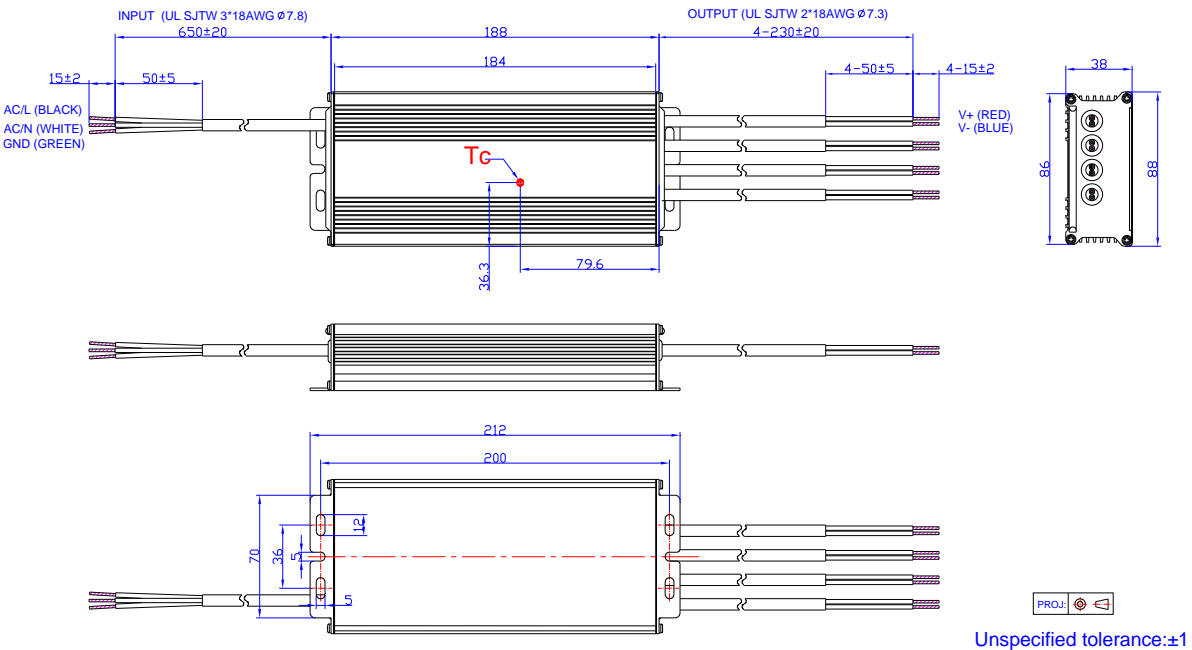

RoHS Compliance

Our products comply with the European Directive 2011/65/EC, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2012-09-07	A	Datasheet Release	/	/
2012-11-07	B	Over Temperature Protection	115 °C	120 °C
		SELV and Wet location of models corrected	/	/
2013-03-14	C	Other models of efficiency curve except 350mA	/	Added
		THD Curve	/	Added
		Mechanical Outline	/	Updated
		Life time	88,700hrs@60°C	90,400hrs@60°C
		Life time curve	/	Updated
2013-05-21	D	Life time	90,400hrs@60°C	95,000hrs@60°C
		Life time curve	/	Updated
2013-10-10	E	No-load Output Voltage	/	Updated
2014-02-25	F	PF Curve	/	Corrected
2017-10-25	G	KS	/	Added
		Features	/	Updated
		Description	/	Updated
		Models	Notes	Updated
		Input Specifications	PF/THD	Updated
		Output Specifications	Turn-on Delay Time	Updated
		Output Specifications	Temperature Coefficient	Updated
		Output Specifications	No-load Output Voltage	Updated
		General Specifications	Case Temperature	Operating Case Temperature for Safety Tc_s
		General Specifications	Operating Case Temperature for Warranty Tc_w	Added
		General Specifications	Storage Temperature	Added
		General Specifications	With mounting ear	Added
		Environmental Specifications	/	Deleted
		Safety & EMC Compliance	/	Added
		Mechanical Outline	/	Updated