



PHYSICAL DIMENSIONS

4 1/4" x 6" Core


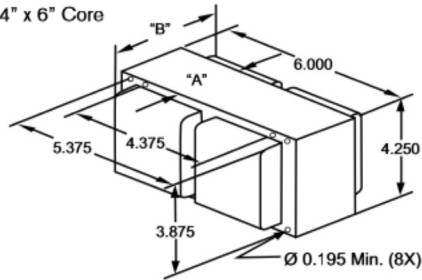


WIRING DIAGRAM

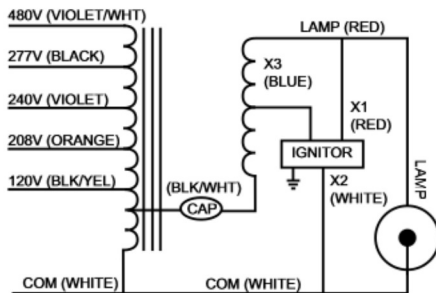


CAPACITOR

Dry Type or Oil Oval

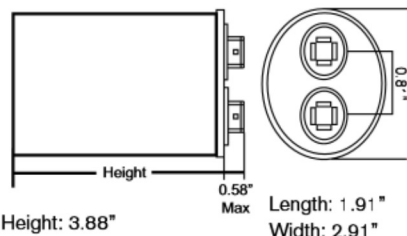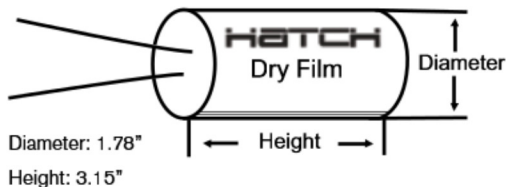

IGNITOR

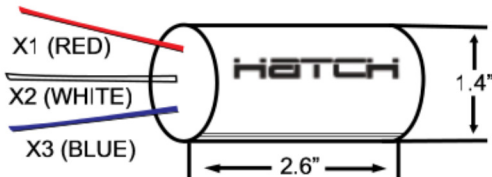

Pulse Height (kV): 3.0 ~ 5.0

Pulse Width ($\geq \mu$ s): 4.0 @ 2.7kV


**2 YEAR WARRANTY FROM
DATE OF MANUFACTURE**

MAGNETIC HID BALLAST

Ballast Type	Magnetic Pulse Start	Circuit Type	CWA
Lamp	1000W Metal Halide M141/M47 OR M166 (875W)	Frequency	60Hz

ELECTRICAL SPECIFICATIONS

		Five Tap				
Input Voltage (V)		120	208	240	277	480
Line Current (A)	Operating	8.8	5.1	4.5	3.9	2.3
	Open Circuit	3.5	2.1	1.8	1.6	0.9
	Starting	8.0	4.6	4.0	3.2	2.0
Recommended Fuse		20	15	10	10	8
Input Voltage At Lamp Dropout		65	115	130	150	265
UL Class H 180°C Temp. Code		C	B	B	A	B
UL Class N 200°C Temp. Code		A	A	A	A	A
Nom. Open Circuit Voltage		413				
Input Power (W)		1070				
Power Factor($\geq$ %)		90				
Regulation ($\pm$ %)	Line Volts	10				
	Lamp Watts	10				
Min. Starting Temp		-20°F / -30°C				
Ballast Dimensions (inches)	A	3.25				
	B	5.22				
Ballast Net Weight (lbs)		21.4				
Lead Length (inches)		12				
Capacitor	Capacitance (μ F)	24				
	Min VAC Rating (V)	480				
	Capacitance (μ F)	22 (With 875 Watt Lamp)				
	Min VAC Rating (V)	480				
Requires Ignitor Model		GHPS1K				
Coil Material (Pri./ Sec.)		Cu / Al				

60 HZ. TEST PROCEDURES

Short Circuit Current (A)	Secondary	Min	4.2				
		Max	6.5				
	Input	Min	4.2	2.4	2.1	1.8	1.1
		Max	12.6	7.2	6.3	5.4	3.2
Open Circuit Voltage (V)		Min	340				
		Max	460				
High Potential Test (V)		1 Minute	2000				
		1 Second	2400				

REFERENCE LAMP DATA

	Test Range	ANSI Standard
Starting Current (A)		4.2 ~ 6.5
CCF	1.4	≤ 1.8
OCV (V)	340 ~ 460	
Off Time (Sec.)	2.3	≤ 2.5
Peak Current (A)	10.6	≤ 11.5
Overshoot (V)	50	≤ 100
VSS (V)	378	≥ 370

OPTIONAL FEATURES

(ADD SUFFIX FOR OPTIONS)

-WB	With welded bracket
-I	With ignitor
-DC	With dry film capacitor
-OC	With oil filled capacitor
-K	With distributor replacement kit (includes bracket, capacitor and ignitor as necessary)