


PRODUCT FOCUS

MINICANDLE

Compact Fluorescent Lamp

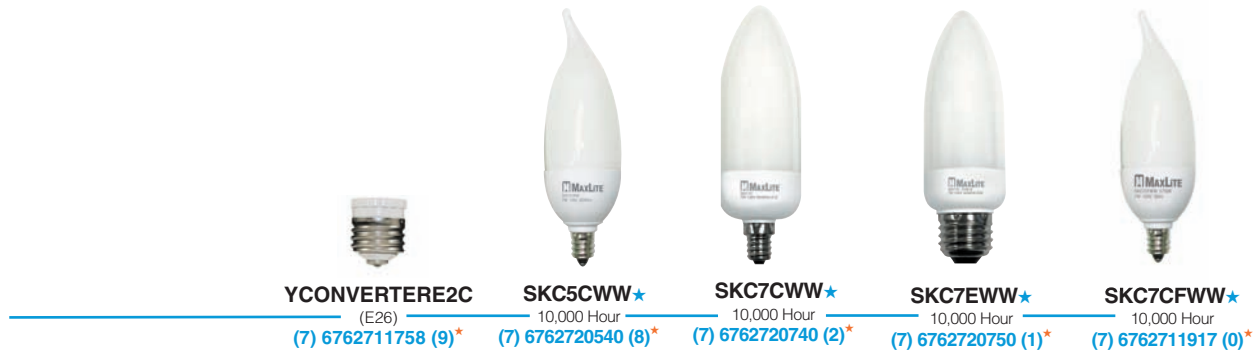

MINICANDLESPECIFICATIONS

Watts	Order Code	Description	Incandescent Equivalent	Lumens	Lamp Life (Hrs)	Pack Type	Case Pack	Dimensions (W" x MOL")	K
★ 5	20540	SKC5CWW Candle Flame Tip E12 Base	25	220	10,000	Box	24	1.42 x 4.84	2700
★ 7	20740	SKC7CWW Candle E12 Base	30	340	10,000	Box	24	1.42 x 4.84	2700
★ 7	20750	SKC7EWW Candle E26 Base	30	340	10,000	Box	24	1.46 x 3.86	2700
★ 7	70608	SKC7CFWW Candle Flame Tip E12 Base	30	340	10,000	Box	24	1.42 x 4.84	2700
	70455	YCONVERTERE2C E12 to E26 Base Adapter				Bulk	25	.8 x 1.13	

All specifications are subject to change without notice

SPECIAL NOTES	APPLICATIONS	LOCATIONS
>> Not for use on circuits with dimmers, timers, or other control devices. >> Converters sold separately for conversion from Candelabra Base to Edison Base	• Chandeliers • Wall Sconces • Ambient Decorative Lighting	• Residential • Restaurant • Retail • Hotel/Motel • Property Management

BENEFITS	SPECIFICATIONS
• Decorative shape and ultra-small size fit most standard and smaller fixtures • E12-E26 Base Converter Available • Saves up to 75% in energy costs • Long Life – Lasts 10,000 hours • Instant-on, flicker-free electronics • Soft natural light with excellent color rendering	• Ballast Type >> Electronic • Starting Method >> Instant Start • Input Line Voltage >> 120VAC • Input Line Frequency >> 50/60HZ • Mini. Starting Temp. >> 0°F • Max. Operating Temp. >> 100°F • Color Rendering Index >> 84

MAX10474-10



FCC Certified
ISO 9002 Certified
★ UPC Codes
★ ENERGY STAR®
Qualified



This device complies with Part 18 of the FCC rules. If interference occurs move this product away from the device or plug into a different outlet. This product may cause interference to radio equipment and should not be installed near maritime safety communications equipment or other critical navigation or communication equipment operating between 0.45-30MHz.