


YSM-2E75-S-TP

Brand Name	MAGNETIC STD
Ballast Type	Magnetic
Starting Method	Instant Start
Lamp Connection	Series
Input Voltage	240
Input Frequency	60 HZ
Status	Discontinued

Electrical Specifications

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	MAX THD %	Power Factor	Lamp Current Crest Factor	B.E.F .
* F60T12	2	50	0/-18	0.50	109	0.93	25	0.91	1.8	0.85
F64T12	2	52	0/-18	0.51	114	0.90	25	0.93	1.8	0.79
F72T12	2	57	0/-18	0.58	130	0.92	25	0.94	1.8	0.71
F84T12	2	70	50/10	0.63	144	0.92	30	0.95	1.7	0.64
F96T12	2	75	50/10	0.67	155	0.92	30	0.97	1.7	0.59
F96T12/ES	2	60	60/16	0.60	131	0.90	35	0.89	1.8	0.69

Wiring Diagram

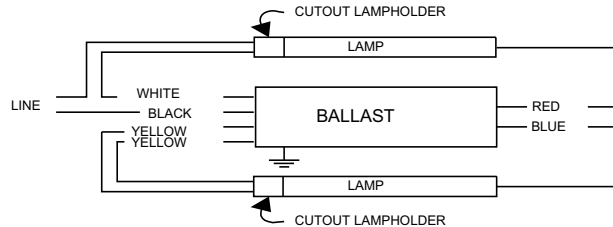


Diag. 36

The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black	19	48.3	Yellow/Blue		0
White	70	177.8	Blue/White		0
Blue	46	116.8	Brown		0
Red	46	116.8	Orange		0
Yellow	70	177.8	Orange/Black		0
Gray		0	Black/White		0
Violet		0	Red/White		0

Enclosure

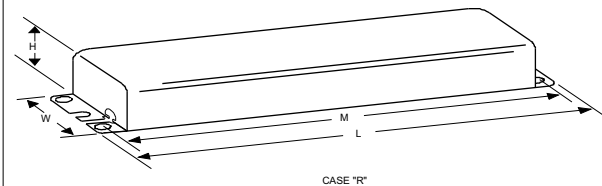

Enclosure Dimensions

OverAll (L)	Width (W)	Height (H)	Mounting (M)
11.75 "	3.109375 "	1.78125 "	11.14062 "
11 3/4	3 7/64	1 25/32	11 9/64
29.8 cm	7.9 cm	4.5 cm	28.3 cm

Revised 10/26/2011

Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.