



PHYSICAL DIMENSIONS


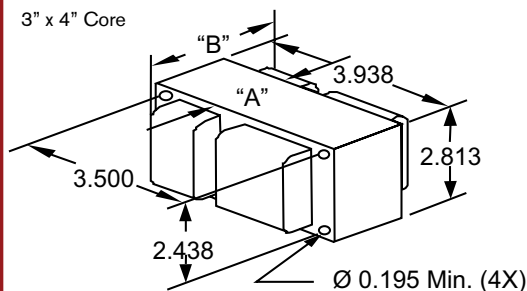


WIRING DIAGRAM

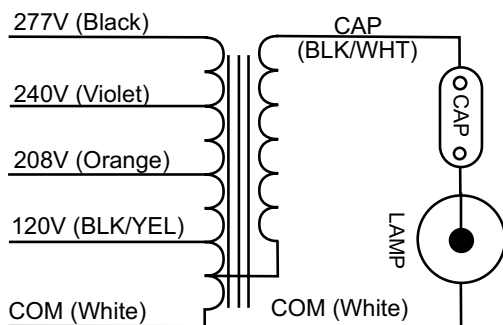

CAPACITOR

Dry Type or Oil Oval

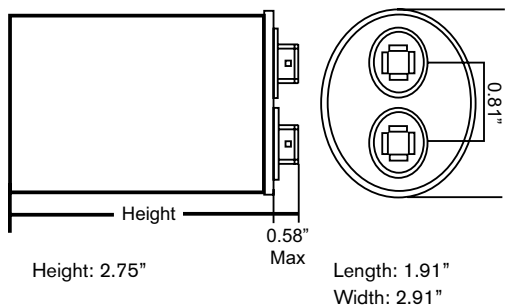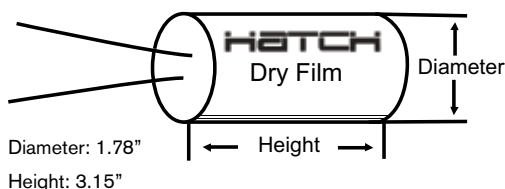

**2 YEAR WARRANTY FROM
DATE OF MANUFACTURE**

MAGNETIC HID BALLAST

Ballast Type	Magnetic Probe Start	Circuit Type	CWA
Lamp	175W Metal Halide M57 or M107 (150W)	Frequency	60Hz

ELECTRICAL SPECIFICATIONS

Input Voltage (V)		Quad Tap			
		120	208	240	277
Line Current (A)	Operating	1.9	1.1	0.95	0.82
	Open Circuit	1.6	0.9	0.8	0.7
	Starting	1.3	0.7	0.6	0.5
Recommended Fuse		10	5	4	3
Input Voltage At Lamp Dropout		65	115	128	150
UL Class H 180°C Temp. Code		B	C	C	C
Nom. Open Circuit Voltage		300			
Input Power (W)		207			
Power Factor (≥ %)		90			
Regulation (± %)	Line Volts	10			
	Lamp Watts	10			
Min. Starting Temp		-20°F / -30°C			
Ballast Dimensions (inches)	A	2.44			
	B	3.8			
Ballast Net Weight (lbs)		6.8			
Lead Length (inches)		12			
Capacitor	Capacitance (µF)	10			
	Min VAC Rating (V)	400			
Requires Ignitor Model		N/A			
Coil Material (Pri./ Sec.)		Cu / Al			

60 HZ. TEST PROCEDURES

Short Circuit Current (A)	Secondary	Min	1.5			
		Max	2.5			
	Input	Min	0.6	0.4	0.3	0.3
		Max	1.8	1.2	1.0	0.9
Open Circuit Voltage (V)	Min	250				
	Max	330				
High Potential Test (V)	1 Minute	2000				
	1 Second	2400				

REFERENCE LAMP DATA

	Test Range	ANSI Standard
Starting Current (A)		1.5 ~ 2.5
CCF	1.6	≤ 1.8
OCV (V)	250 ~ 330	
di/dt (A/ms)	1.1	≥ 0.65
Off Time (Sec.)	1.8	≤ 2.75
Peak Current (A)	3.3	≤ 3.8
Overshoot (V)	-14	≤ 45
VSS (V)	269	

OPTIONAL FEATURES

(ADD SUFFIX FOR OPTIONS)

-WB	With welded bracket
-I	With ignitor
-DC	With dry film capacitor
-OC	With oil filled capacitor
-K	With distributor replacement kit (includes bracket, capacitor and ignitor as necessary)