

PERFORMANCE

- Minimum Starting Temperature: -20°F
- Maximum Case Temperature: 194°F, 90°C
- OCV: 590V

APPROVALS

- HL Type - Hazardous Location
- UL, cUL 935 Listed
- Class P
- Type 2 Outdoor



WIRE LENGTHS

- (1) Black 24"
- (1) White 24"
- (2) Brown 46"
- (2) Yellow 75"
- (2) Blue 75"
- (2) Blue/White 46"
- (2) Red 46"

3 YEAR WARRANTY FROM DATE OF MANUFACTURE

MAGNETIC FLUORESCENT SIGN BALLAST

Ballast Type	Magnetic	Starting Method	Rapid Start
Lamp Connection	Series	Input Voltage	120Vac +5/-10%
Input Frequency	60Hz		


Electrical Specifications

Lamp Type	No. of Lamps	Lamp Footage	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F36T12/HO	2	6	123	1.17	>0.92	<1.8	1.06	0.86	45
F60T12/HO	4	20	300	2.66	>0.94	<1.8	0.96	0.32	15
F72T12/HO	3	18	260	2.31	>0.97	<1.8	0.96	0.37	15

This Ballast Will Not Operate Any Lamp Exceeding 8 Feet.

Physical Dimensions

Length (L): 11.75"
Width (W): 3.19"
Height (H): 2.60"
Mounting (M): 11.0"

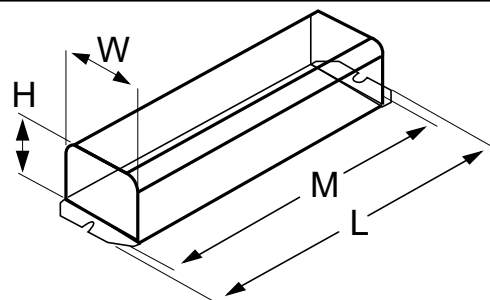

Wiring Diagram

