



Electronic Transformers

75 WATT “RL” SERIES DIMMABLE ELECTRONIC TRANSFORMERS

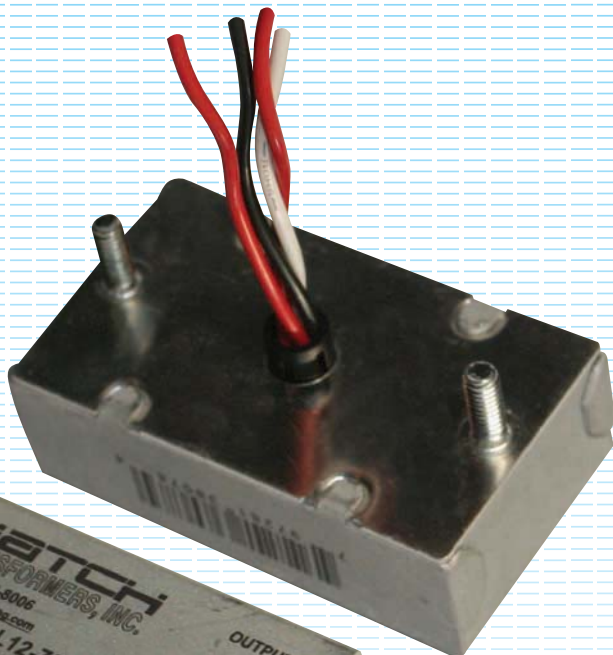

RL12-75ABF

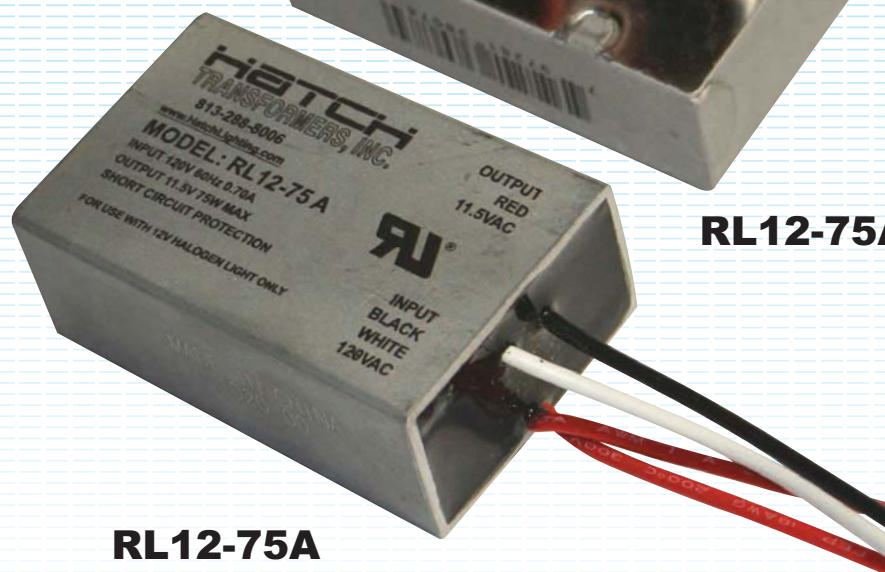

RL12-75A

Electrical/Mechanical Specifications

Electronic Short-Circuit Protection

All Hatch low-voltage transformers employ our (ESP) Electronic Short Circuit and over load Protection. The ESP sensing circuit will instantly shut down the output before any of the components are stressed if a short circuit or over load is detected. The transformer will automatically reset as soon as the fault is corrected.

75 Watt “RL” Series

Electronic Low Voltage Transformer Product Features:

- High Reliability
- Moisture Resistant
- Emits No Audible Noise
- Low Harmonic Distortion
- High Power Factor
- Lightweight, Compact Design
- Small Case Size
- Works with most commercially available dimmers. Hardwire electronic dimmers are recommended for optimum performance.
(See notes on back page.)

Environmental Specifications

Maximum Case Temperature	194° F, 90° C
Minimum Starting Temperature	0° F, - 18° C
Sound Rating	A+
Operating Humidity	95% relative humidity, non-condensing
Environmental Protection	Epoxy Sealed for moisture resistance and shock/vibration resistance
Safety Listing	c  US Class P Type 1 outdoor


Electrical/Mechanical Specifications

Input	120VAC - 50/60 Hz
Output	11.5 VAC
Enclosure Material.....	Aluminum
Weight	2.4 oz.
Power Factor	0.98
Operating Frequency	25 KHz
Total Harmonic Distortion	≤ 20%
Safety Standard	c  US
Input:.....	Black & White 8"
Output:	Red 6"

Electronic Transformer


75 Watt “RL” Series

DIMENSIONS

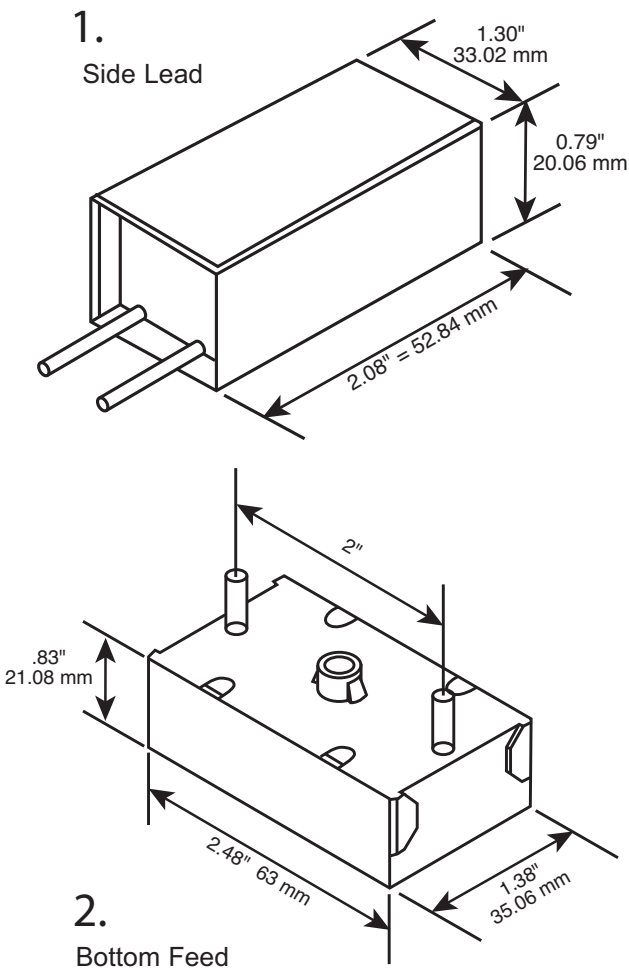

WIRING DIAGRAMS

DIAGRAM

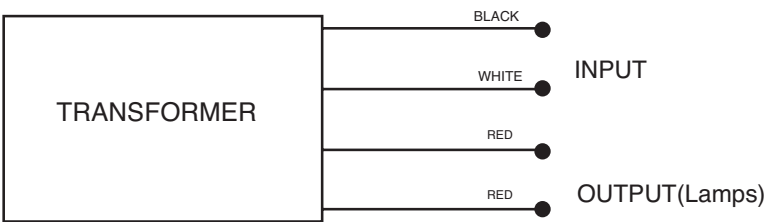

HARDWIRE ELECTRONIC

Max Watts	Min Watts	Input Volts	Output Volts	Input Amps	Output Amps	Wiring Diagram	Case Style	Hatch Item No.	Safety Listing
75	20	120	11.5	0.63	6.3	A	1	RL12-75A	UL/C-UL Recognized
							2	RL12-75ABF	

Note: Lamp types minimumload for dimming is 20W. It is also important to confirm dimming controls compatibility with the manufacturer and your Hatch representative.