

DESCRIPTION


The **I42 L** Compact Fluorescent Emergency Ballast Kit is designed to allow shallow or unusually shaped fixtures (such as wall packs, sconces, and recessed stair fixtures) to be configured for normal and emergency operation. The unit consists of an open circuit board assembly and battery pack, which is offered in three profile options. In the event of a power failure, the **I42 L** switches to the emergency mode and operates **one or two** of the existing lamps for **90 minutes**. The **I42 L** can be used with most 10W-42W twin, triple, quad tube, 2D and straight 4-pin compact fluorescent lamps and 18W-36W long compacts, with a total initial output of up to **650 lumens** for one or two lamps. The **I42 L** utilizes **AC output to ensure compatibility with new lamp technologies**, and features lamp selector leads for optimizing light output for designated lamp types. The **I42 L** is a U.L. Recognized Component for factory installation only.

SPECIFICATIONS

Input Voltage	(Dual) 120/277V, 60Hz
Input Wattage	3.5 Watts
Lamps Operated	10W-42W 4-pin Rapid Start Twin, Triple, Quad Tube, 2D & Straight Compact Lamps, and 18W-36W Long Compact Lamps
Emergency Operation*	(1) 10W-42W or (2) 10W-18W 90 minutes *Long Compact - (1) lamp only
Initial Illumination	650 lumens (2) lamps 325 lumens each lamp
Operating Temp	0° to 50° C
Battery	24 Hour Recharge 7-10 Year Life Expectancy
Weight	2.5 lbs.
UL Conditions of Acceptability	Must be factory wired Battery temperature must not exceed 50° C



DIMENSIONS

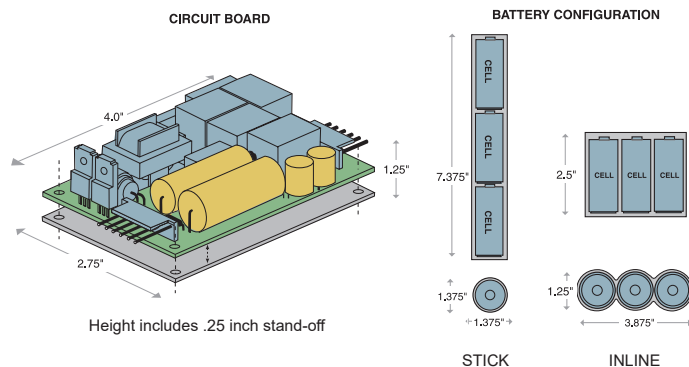

MODEL NO: _____

TYPE: _____

PROJECT: _____

COMMENTS: _____

INITIAL LUMEN OUTPUT

650 Lumens

LAMPS OPERATED*




(1) 10W-42W 4-PIN Compact (2) 10W-18W 4-PIN Compact
(1) 18W-36W Long Compact

*Refer to Lumen Reference Chart for list of compatible lamps

PRODUCT ADVANTAGES

- **Open Circuit Board Design for use in fixtures with limited space**
- **AC output for compatibility with Low-Mercury Content Amalgam lamps**
- **Time Delay feature for compatibility with End-of-Lamp-Life Circuitry**
- **Open Circuit Isolation protects unit when load is absent**
- **Two battery profiles available**

FEATURES

- UL Recognized Component
- Will cold start and operate all specified lamps
- Long life high temperature recyclable Ni-Cad battery
- Includes one-piece TBTS test switch and charge indicator
- For use with switched or unswitched fixtures
- **5-Year Warranty**
- Lamp selector leads optimize light output for desired lamp type
- Meets or exceeds all NEC, IBC, and Life Safety Code Emergency Lighting Requirements
- RoHS Compliant 
- International Voltage Models available



I42 L

FLUORESCENT EMERGENCY BALLAST KIT FOR 4-PIN LAMPS

CONFIGURATION



I42 L SAMPLE SPECIFICATION

Emergency lighting shall be provided by using a standard fluorescent fixture equipped with an **IOTA I42 L** fluorescent emergency battery kit. The **I42 L** shall consist of a high temperature, maintenance-free nickel cadmium battery, charger board and an electronic circuit installed within the designated fixture. A combination one-piece long-life LED charge indicator light and test switch shall be included. The fluorescent EM kit shall operate one 10w-42w or two 10w-18w twin, triple, quad tube, 2D or straight **4-pin** fluorescent lamps, or one 18w-36w long compact fluorescent lamp. The **I42 L** shall provide reduced illumination for a minimum of 90 minutes in the emergency mode with a total initial output of 650 lumens. **The I42 L will operate the lamp(s) with AC output** and will feature lamp selector leads for optimizing light output for the designated lamp type. The **I42 L** shall have 3.5 watts of input power and a battery capacity of 14.4 watt hours. The **I42 L** is a UL Recognized Component and meets or exceeds all NEC and Life Safety Code Emergency Lighting Requirements. The **I42 L** is warranted for a full five (5) years from the date of purchase.

INITIAL LUMEN RATINGS

LAMP	1 LAMP	2 LAMPS
13W PL CF 4-PIN	350	400
18W PL CF QUAD 4-PIN	350	550
26W PL CF QUAD 4-PIN	425	
32W PL CF QUAD 4-PIN	600	
42W PL CF QUAD 4-PIN	750	
F282 D/42 4-PIN	475	500
F382 D/42 4-PIN	500	650
18W LONG COMPACT	500	
24W LONG COMPACT	575	
36W LONG COMPACT	650	

Warranty: 5-Year Limited Warranty
Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx