

4


3

DWG NO. 1000821 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

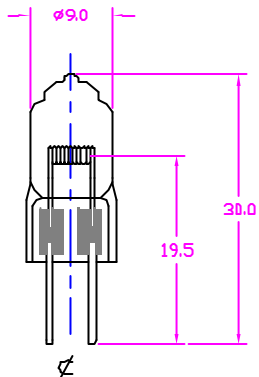

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS

DESIGN VOLTS	12 V
DESIGN WATT	20 W
LUMEN OUTPUT	380 Lm
COLOR TEMP	2850 K
BASE TYPE	C4
AVERAGE LIFE	2000 HRS
FILAMENT TYPE	C-8
BURN POSITION	ANY

NEXT ASSY	USED ON
APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DATE		
			DRAWN R.AMPARO 02/05/01		
			CHECKED K.CORDERO 02/05/01		
MATERIAL			ENGR		
COMPOSITE			MFG		
FINISH			QUAL		
			DESIGN ACTVY		
			DDVT ACTVY		
			SCALE NONE		
			WEIGHT		
			SHEET 1 OF 1		

USHIO AMERICA, INC.

5440 Carritas Ave. Cypress, CA 90630

TITLE

JC12V-20W/G4 C-6
HALOGEN LAMP

SIZE

B

CODE IDENT NO.

1000821

DWG NO.

1000821

4

3

2

1

CAD