

KTEB-221PS-1-TP	
Ballast Type	Electronic
Starting Method	Programmed Preheat Start
Lamp Connection	Parallel
Input Voltage	120Vac $\pm$ 10%
Input Frequency	60Hz / 50Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F28T5	2	50	0.70	0.59	1.51	0.80	1.60	130
F21T5	2	41	0.60	0.58	1.51	1.0	2.44	130
F14T5	2	30	0.44	0.55	1.55	0.95	3.17	130

PERFORMANCE:


- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Lamp end-of-life protected
- Meets FCC Part 18 (Class B) Consumer Limits
- 3-Year Warranty

APPROVALS:


- UL, cUL 935 listed.

PHYSICAL DIMENSIONS:

Length (L):	6.46"
Width (W):	1.37"
Height (H):	1.00"
Mounting (M):	6.00"

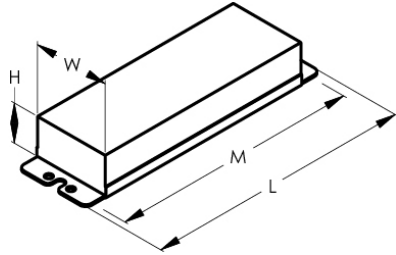

WIRING DIAGRAM:

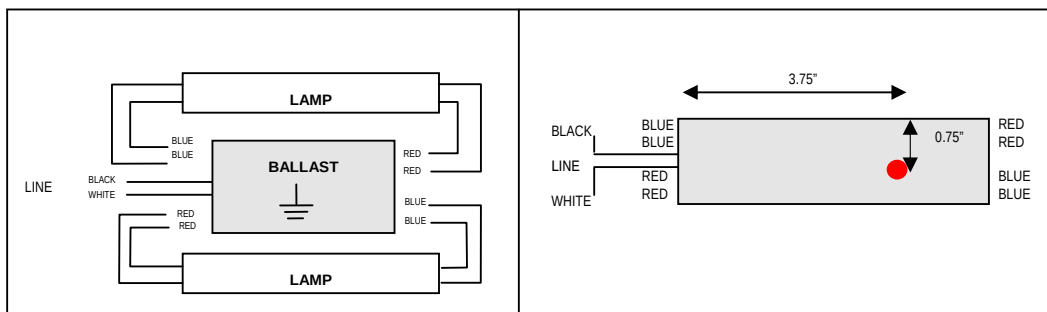

Hot Spot Location:

