

KTEB-228-1-TP-PH-SL	
Ballast Type	Electronic
Starting Method	Rapid Start
Lamp Connection	Parallel
Input Voltage	120Vac $\pm$ 10%
Input Frequency	60Hz / 50Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F28T5	2	56	0.83	0.56	1.42	0.86	1.54	130
F21T5	2	46	0.70	0.55	1.43	0.95	2.07	130
F14T5	2	38	0.59	0.54	1.51	1.14	3.00	130

PERFORMANCE:


- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Lamp end-of-life protected
- Meets FCC Part 18 (Class B) Consumer Limits
- 3-Year Warranty

APPROVALS:


- UL, cUL 935 Listed

PHYSICAL DIMENSIONS:

Length (L): 9.00"
Width (W): 0.95"
Height (H): 0.95"
Mounting (M): 8.75"

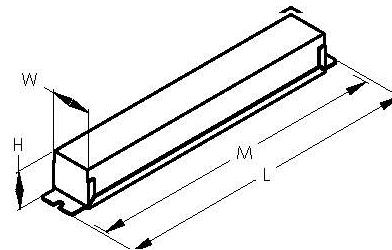

WIRING DIAGRAM:

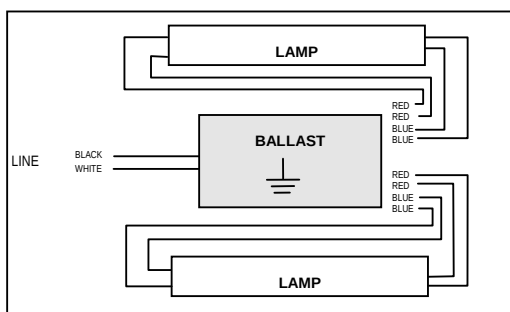

Hot Spot Location:

