

KTEB-232RIS-1-TP-SL	
Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	Parallel
Input Voltage	120Vac $\pm$ 10%
Input Frequency	60Hz / 50Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F32T8	2	57	0.80	0.60	1.7	0.88	1.54	150
	1	37	0.55	0.57	1.7	1.00	2.70	150
F25T8	2	57	0.65	0.57	1.7	0.90	1.58	150
	1	31	0.47	0.57	1.7	1.05	3.39	150
F17T8	2	34	0.50	0.54	1.7	0.93	2.74	150
	1	25	0.39	0.54	1.7	1.10	4.40	150
F40T12	1	42	0.60	0.57	1.7	1.00	2.38	150

PERFORMANCE:


- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- OCV: 600V

APPROVALS:


- UL, cUL 935 listed

PHYSICAL DIMENSIONS:

Length (L):	9.50"
Width (W):	1.16"
Height (H):	0.88"
Mounting (M):	8.90"

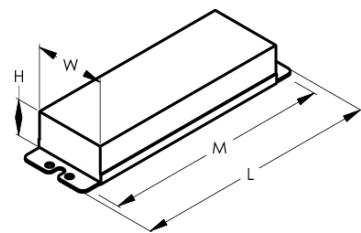

WIRING DIAGRAM:

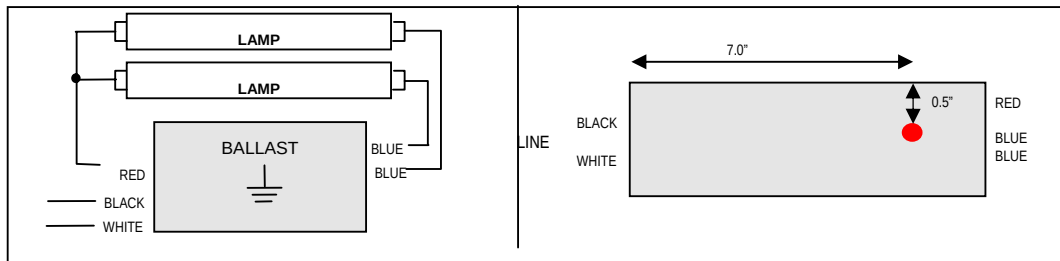

Two Lamps Application
(Cap off 1 Blue Lead for 1 lamp application)