

# Linear T5HE HO

Commercial Grade LED T5 Lamp















#### \* EMERGENCY BALLAST RESTRICTIONS


### Features & Benefits


- No rewiring needed
- Works with fluorescent electronic T5 ballast
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing T5 sockets
- Compatible with controls and sensors
- No Mercury, No UV
- Works in cold temperature applications
- Glass tube for superior optical performance
- Full Glass Design
- Super Wide View Angle, 240
- 5 Year Warranty

## Specification

Order Code1	Length	Lamp Wattage	System Wattage	ССТ	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life	OLG.
L36T5HO/830/18G-EB-AC	36 in	18W	21W	3000K	1680	83	240	93	80	50000	No
L36T5HO/835/18G-EB-AC	36 in	18W	21W	3500K	1680	83	240	93	80	50000	No
L36T5HO/840/18G-EB-AC	36 in	18W	21W	4000K	1680	83	240	93	80	50000	No
L36T5HO/850/18G-EB-AC	36 in	18W	21W	5000K	1680	83	240	93	80	50000	No

## Wiring Diagram

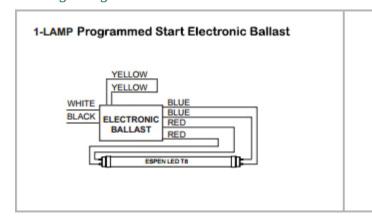



Dlc Information



Order Code	DLC Product ID	DLC Product Model	DLC Version
L36T5HO/830/18G-EB-AC	N/A	N/A	N/A
L36T5HO/835/18G-EB-AC	N/A	N/A	N/A
L36T5HO/840/18G-EB-AC	N/A	N/A	N/A
L36T5HO/850/18G-EB-AC	N/A	N/A	N/A

<sup>\*</sup> Please refer to "Ballast Compatibility List" for compatible battery backup and/or emergency ballasts.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.

Toll Free: (866) 933-7736 | Tel.: (562) 529-2938 | Fax: (562) 529-2978 | Email: info@espentech.com

<sup>\*</sup> Please refer to "Ballast Compatibility List" on Related Downloads.