

## **Features & Benefits**

- No rewiring needed
- Works with fluorescent electronic T5 ballast
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing T5 sockets
- No Mercury, No UV
- Compatible with controls and sensors
- Works in cold temperature applications
- Full Glass Design
- Super Wide View Angle, 240°
- 5 Year Warranty







\* EMERGENCY BALLAST RESTRICTIONS








## **Specification Data**

Order Code	Length	Lamp Wattage	System Wattage	сст	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life	
L48T5HO/835/24G-EB-AC	48"	25W	28W	3500K	3200	83	240°	128	115	50000	Yes
L48T5HO/840/24G-EB-AC	48"	25W	28W	4000K	3200	83	240°	128	115	50000	Yes
L48T5HO/850/24G-EB-AC	48"	25W	28W	5000K	3200	83	240°	128	115	50000	Yes
L48T5HO/830/24G-EB-AC	48	25W	28W	3000K	3200	83	240	128	115	50000	Yes

## **Wiring Diagram**

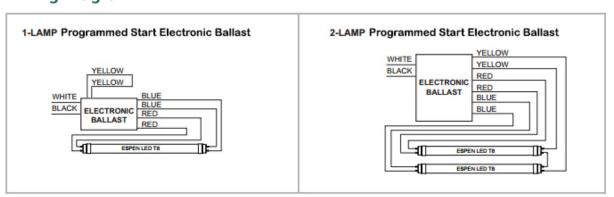

- \* Please refer to "Ballast Compatibility List" for compatible battery backup and/or emergency ballasts.
- \* Please refer to "Ballast Compatibility List" on Related Downloads.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.