

Features & Benefits

- No rewiring needed
- Works with fluorescent electronic ballast (Instant Start and Programmed Start)
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing instant start or rapid start sockets
- Works with dimming ballast
- Compatible with controls and sensors
- Works in cold temperature applications
- Glass tube for superior optical performance
- 5 Year Warranty




RetroFlex™
LED T8 LAMP • Simplicity.
Commercial Grade LED T8 Lamp

Specification Data

Order Code	Length	Power	Input Voltage	CCT	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life
L96T8/850/42W-EB 96	42	42	300-635V	5000K	4200	83	240	115	100	50,000
L96T8/840/42W-EB 96	42	42	300-635V	4000K	4200	83	240	115	100	50,000
L96T8/835/42W-EB 96	42	42	300-635V	3500K	4200	83	240	115	100	50,000

PRODUCT SPECIFICATIONS

Photometric Data

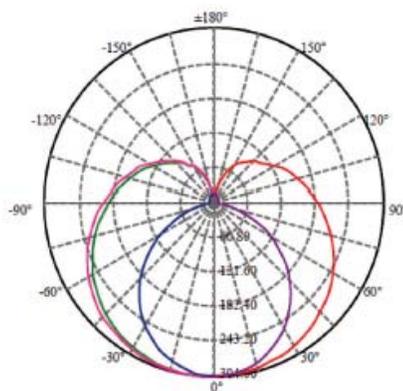

C195(Max) _____

C0 _____

C180 _____

C90 _____

C270 _____

Wiring diagram

* Please check ballast compatibility list before installation.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.