# **LED Turtle Safe Series: A19 / PAR Dimmable Series**

| Stock No. | Product Description         |
|-----------|-----------------------------|
| LED-1733  | A19-120-7-1-Amber (590nM)   |
| LED-4270  | MR16-30-5-1-Amber (590nM)   |
| LED-1730  | PAR20-30-6-1-Amber (590nM)  |
| LED-1731  | PAR30-30-10-1-Amber (590nM) |
| LED-1732  | PAR38-30-15-1-Amber (590nM) |

### **Description:**

A19, PAR: Fully encapsulated, 120 Volt, screw-in medium base mounting. MR-16: 12Volt, GU-5.3 Mounting. Amber LED @ 590nM complies with marine turtle safe lighting requirements within coastal regions

- Amber LEDs , 120 Volt operation (12V for LED-4270)
- Remote transformer not required
- Operates off of standard house current
- AMBER LED's 590nM
- Compare to up to 50w
- Up to 50,000 hour lamp life
- Low heat output
- 5 year warranty (see www.ledllc.com for full details)
- Dimmable\*
- UL listed
- Energy Star certified (LED-1668-B only)

#### **Applications:**


Indoor incandescent retrofit applications near coastal area.

- Retail display applications
- Task lighting
- Track lighting
- Recessed down lighting
- Residential lighting

## Packaging:

Master pack: 25 lamps

\*Dimming: Contact sales@ledllc.com for a full list of compatible incandescent dimmers.

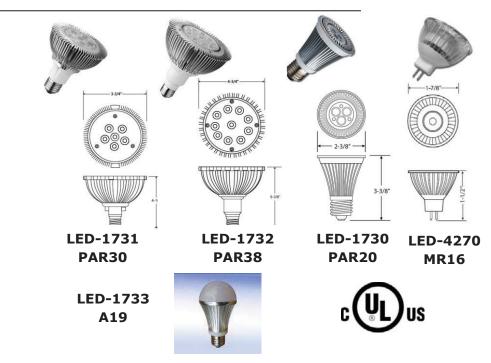

## **Technical Specifications:**

| Model               | LED-1731    | LED-1732        | LED-1730    | LED-4270 | LED-1733 |  |  |  |
|---------------------|-------------|-----------------|-------------|----------|----------|--|--|--|
| <b>Bulb Type</b>    | PAR30       | PAR38           | PAR20       | MR16     | A19      |  |  |  |
| Base Type           | E26         | E26             | E26         | GU5.3    | E26      |  |  |  |
| Material            |             | Alum/Poly       |             |          |          |  |  |  |
| <b>Power Used</b>   | <b>10</b> w | 15w             | 6w          | 5w       | 7w       |  |  |  |
| Replaces            | 40w         | 50w             | <b>20</b> w | 15w      | 25w      |  |  |  |
| Lumens              | 350lm       | 500lm           | 200lm       | 150lm    | 225lm    |  |  |  |
| <b>Input Voltag</b> | e 120v      | 120v            | 120v        | 12v      | 120v     |  |  |  |
| Color               |             | Amber LED 590nm |             |          |          |  |  |  |
| CRI                 | 30          | 30              | 30          | 30       | 30       |  |  |  |
| Dimmable            | Yes         | Yes             | Yes         | Yes      | Yes      |  |  |  |

Note: All specification information falls within a  $\pm$  2% range and is subject to change without notice.

NOTE: Light Efficient Design is providing this information to the general public. Please note that all products contained herein are trademarked, copyrighted, and/or have patents pending. Any use of these designs is strictly prohibited without prior written consent. Light Efficient Design protects its proprietary information vigorously in the courts of the United States of America.