




Operates on
120V or 277VAC

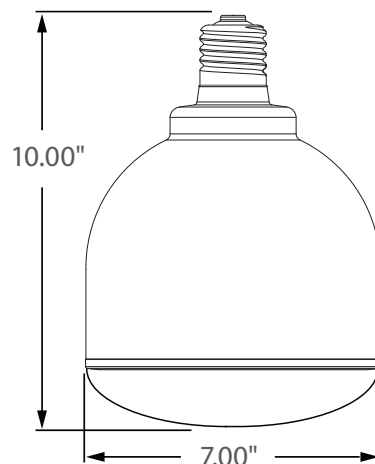

Incredible **70,000** hrs

GENERAL DESCRIPTION

Neptun's LED R56 retrofit lamps are designed for the replacement of existing HID down lighting systems. The LED-956 series lamps are offered in a variety of color temperatures and wattages for flexibility in all types of applications. The round diffused lens allows for great light distribution in high ceilings and hard to access applications, which greatly reduces maintenance costs. It can replace existing HID downlights up to 175W.

APPLICATION

- High Ceiling Down Lighting
- Atrium Lighting
- Canopy Lighting
- Church Lighting

STRUCTURE, MATERIALS, & FEATURES

- Aluminum cast heat sink for excellent thermal management.
- Mogul (E40) base socket allows for easy installation.
- Correlated Color Temperatures of 3000°K, 4100°K, & 5000°K.
- Mercury free design.
- No radiated EMI interference.
- 36 PCS High Output LED's.
- High power factor, low THD internal driver.
- InstantON flicker-free Cold Start and Hot Re-Start.
- Up to 15 years Maintenance free operation.
- 5 Year Warranty.

ORDERING INFORMATION

Sample Number: LED-35650-UNV-850-E40
Custom options and accessories available. Please consult factory

Source	Series	Wattage	Voltage	Color Temp	Base
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
LED = LED	356 = PAR56	50 = 50 W	UNV = 120-277 VAC	830 = 3000°K 841 = 4100°K 850 = 5000°K	E40 = Mogul Base



PRODUCT INFORMATION

Model No.	Rated Watts	Input Watts	Color Temp.	Initial Lumens	Universal Line Voltage (VAC)	Max Line Current (Amp) @ 120 - 277	THD	Power Factor	Base	Beam Spread
LED-35650-UNV-830	50	51	3,000°K	3,700	120-277	0.43 - 0.18	<20%	>0.90	E40	120°
LED-35650-UNV-841	50	51	4,100°K	3,900	120-277	0.43 - 0.18	<20%	>0.90	E40	120°
LED-35650-UNV-850	50	51	5,000°K	4,100	120-277	0.43 - 0.18	<20%	>0.90	E40	120°

SPECIFICATIONS

- LED Driver Constant Current
- Power Supply 350mA
- Start Method InstantON
- Hot Re-start InstantON
- Universal Input Line Voltage 120-277 VAC
- Input Line Frequency 50/60 Hz
- Driver Off-State Draw 0 Watts
- Sound Rating Class A
- ANSI Surge Protection Class A
- LED / Driver System Life 70,000 Hrs.
- Lumen Maintenance @50,000Hrs > 70%
- Color Temperature 3000°K, 4100°K, 5000°K
- Color Rendering Index (CRI) > 80
- Beam Spread 120°
- Minimum Starting Temperature -35°C
- Maximum Starting Temperature 40°C
- Lumens per Watt > 80
- Power Factor > 0.90
- Total Harmonic Distortion < 20%
- Inrush Current Peak < 10 Amp
- ETL Listed / UL Standard 1598 Yes
- FCC Compliance Part 15, Subp. C
- Warranty 5 Year

RECOMMENDED APPLICATION FIXTURES



- Existing opening must be at least 8" in diameter
- Excellent replacement for high ceiling applications



(E26A) IOP-E40-E26-EXTENDER
Mogul to Medium Base Adapter
** ORDER SEPERATELY

* Contact Factory for Application Verification.