


LED Turtle Safe Series: A19 / PAR Dimmable Series

Stock No.	Product Description
LED-1733	A19-120-7-1-Amber (590nm)
LED-4270	MR16-30-5-1-Amber (590nm)
LED-1730	PAR20-30-6-1-Amber (590nm)
LED-1731	PAR30-30-10-1-Amber (590nm)
LED-1732	PAR38-30-15-1-Amber (590nm)

Description:

A19, PAR: Fully encapsulated, 120 Volt, screw-in medium base mounting. MR-16: 12Volt, GU-5.3 Mounting. Amber LED @ 590nm complies with marine turtle safe lighting requirements within coastal regions

- Amber LEDs , 120 Volt operation (12V for LED-4270)
- Remote transformer not required
- Operates off of standard house current
- AMBER LED's 590nm
- Compare to up to 50w
- Up to 50,000 hour lamp life
- Low heat output
- 5 year warranty (see www.led-llc.com for full details)
- Dimmable*
- UL listed
- Energy Star certified (LED-1668-B only)

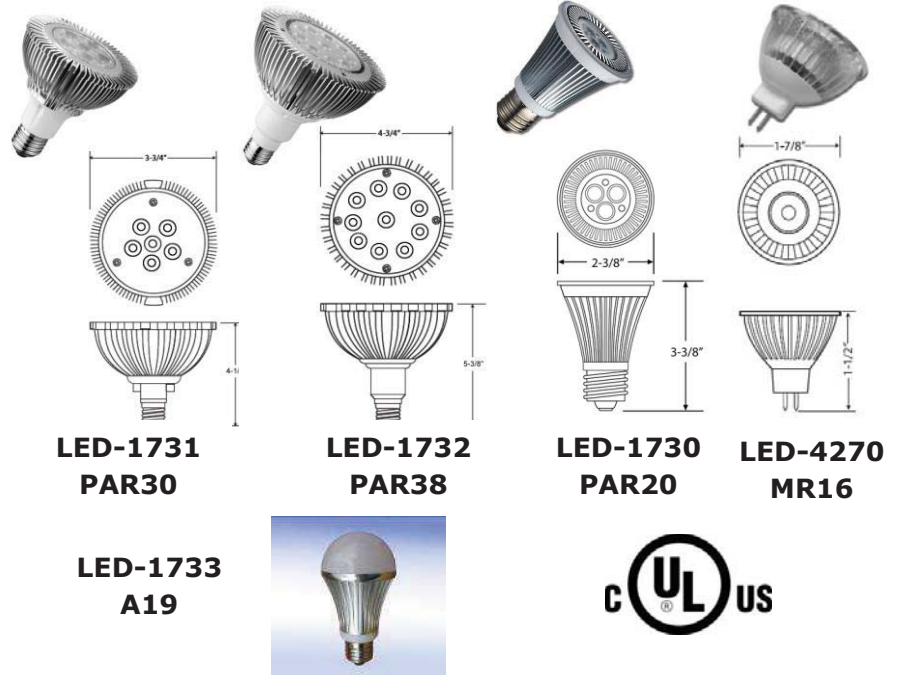

Applications:

Indoor incandescent retrofit applications near coastal area.

- Retail display applications
- Task lighting
- Track lighting
- Recessed down lighting
- Residential lighting

Packaging:

Master pack: 25 lamps

***Dimming:** Contact sales@led-llc.com for a full list of compatible incandescent dimmers.

Technical Specifications:

Model	LED-1731	LED-1732	LED-1730	LED-4270	LED-1733
Bulb Type	PAR30	PAR38	PAR20	MR16	A19
Base Type	E26	E26	E26	GU5.3	E26
Material	Alum/Poly				
Power Used	10w	15w	6w	5w	7w
Replaces	40w	50w	20w	15w	25w
Lumens	350lm	500lm	200lm	150lm	225lm
Input Voltage	120v	120v	120v	12v	120v
Color	Amber LED 590nm				
CRI	30	30	30	30	30
Dimmable	Yes	Yes	Yes	Yes	Yes

Note: All specification information falls within a $\pm 2\%$ range and is subject to change without notice.

NOTE: Light Efficient Design is providing this information to the general public. Please note that all products contained herein are trademarked, copyrighted, and/or have patents pending. Any use of these designs is strictly prohibited without prior written consent. Light Efficient Design protects its proprietary information vigorously in the courts of the United States of America.