



Operates on
120-277 VAC



Incredible **25,000** hrs

GENERAL DESCRIPTION

Neptun's high performance LED A21 bulbs are designed for the replacement of existing incandescent or halogen bulbs up to 75W. The LED-621 series bulbs are offered in a variety of color temperatures for flexibility in all types of applications. Its universal operating voltage allows for use in 120V or 277V applications.

APPLICATION

- Suitable for use in outdoor and indoor environments
- Not for use in fully enclosed fixtures
- Not for use where directly exposed to water

STRUCTURE, MATERIALS, & FEATURES

- Fin-less design with excellent thermal management.
- Round frosted polycarbonate shatterproof lens. (Glare Free)
- Wide variety of Correlated Color Temperatures.
- High Luminous Efficacy: > 90 Lm/W
- Environmental Friendly - mercury and lead free.
- Up to 15 years Maintenance free operation.
- Integrated high efficiency driver.
- High Output LED's.
- RoHS Compliant.
- No UV or IR radiation.
- 5 Year Warranty.

ORDERING INFORMATION

Sample Number: LED-62113-UNV-841-E26
Custom options and accessories available. Please consult factory

| Series | Wattage | Voltage | Color Temp | Base |
|---------------|-----------|-------------------|--|-------------------|
| LED-621 = A21 | 13 = 13 W | UNV = 120-277 VAC | 827 = 2700°K 830 = 3000°K 841 = 4100°K 850 = 5000°K | E26 = Medium Base |



lightinnovations@work™

PRODUCT INFORMATION

| Model No. | Watts | Input Line Current (Amp) @ 120-277VAC | Power Factor | THD | CCT (°K) | CRI | Lumens | Lm/W | Base | Beam Angle |
|-------------------|-------|---------------------------------------|--------------|------|----------|-----|--------|------|------|------------|
| LED-62113-UNV-827 | 13 | 0.113-0.049 | >0.90 | <15% | 2,700° | >80 | 1,196 | 92 | E26 | 300° |
| LED-62113-UNV-830 | 13 | 0.113-0.049 | >0.90 | <15% | 3,000° | >80 | 1,222 | 94 | E26 | 300° |
| LED-62113-UNV-841 | 13 | 0.113-0.049 | >0.90 | <15% | 4,100° | >80 | 1,248 | 96 | E26 | 300° |
| LED-62113-UNV-850 | 13 | 0.113-0.049 | >0.90 | <15% | 5,000° | >80 | 1,274 | 98 | E26 | 300° |


SPECIFICATIONS

- LED Driver Constant Current
- Power Supply 350mA
- Start Method InstantON
- Hot Re-start InstantON
- Universal Input Line Voltage 120-277 VAC
- LED / Driver System Life 25,000 Hrs.
- Color Temperature Various
- Color Rendering Index (CRI) > 80
- Minimum Starting Temperature -20°C
- Maximum Starting Temperature +45°C
- Lumens per Watt > 90
- Power Factor > 0.90
- Total Harmonic Distortion < 15%
- FCC Compliance Part 15, Subp. C
- Warranty 5 Year

ENERGY SAVINGS

75% Energy Savings

Operation Costs Comparison over Life of LED Bulb

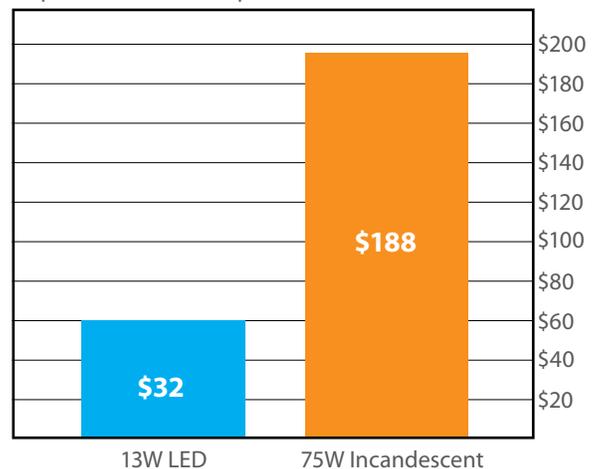

*Based on \$0.10 kw/H
*12Hrs. per Day Usage

Neptun Light, Inc.
13950 Business Center Drive
Lake Forest, IL 60045
Fax: 847.735.8004

Neptun Light, Inc. reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.
©2002-2016 Neptun Light, Inc. All rights reserved. Spec. Rev. 7-2016