



Key Features & Benefits


- ▶ Retrofit for T8 & T12 Fluorescent Tube
- ▶ Excellent color consistency
- ▶ No flickering
- ▶ Noise free design
- ▶ Universal Voltage 120-277V
- ▶ UL/cUL Listed
- ▶ 50,000 hrs rated average life

Applications

- ▶ Conference Room
- ▶ Meeting Room
- ▶ Factory/ Office
- ▶ School & University
- ▶ Hospital
- ▶ Hotel




LED TUBE T8




Dimensions

LED	Diameter (in/mm)	Length (in/mm)	Weight (lbs)
2 ft	1 / 25.4	24 / 610	0.50
3 ft	1 / 25.4	36 / 915	0.50
4 ft	1 / 25.4	48 / 1219	0.80
8 ft	1 / 25.4	94 / 2381	1.50

Wiring Method

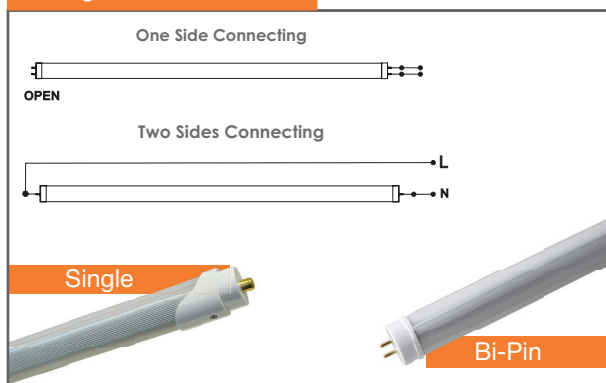

Package

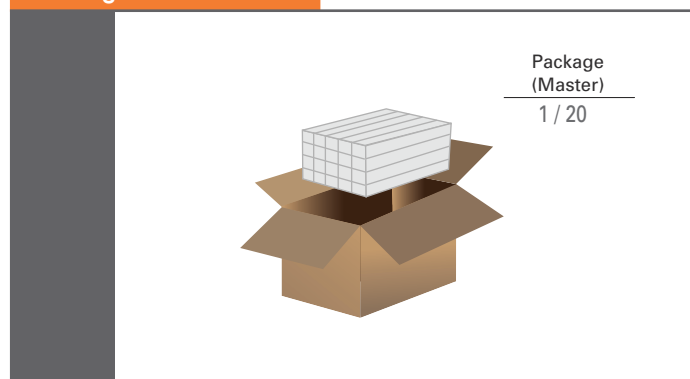

Product Data

Item Code	Description	Wattage	CCT	Lumen Output	Equiv. Wattage	Lens	Bulb	Base	DLC
5778	LED10T8/24FR10/840	10W	4000K	1,000	17W	Frosted	24"	Bi-Pin	●
5774	LED10T8/24FR10/850	10W	5000K	1,050	17W	Frosted	24"	Bi-Pin	●
5779	LED10T8/36FR10/840	10W	4000K	1,000	25W	Frosted	36"	Bi-Pin	●
5780	LED10T8/36FR10/850	10W	5000K	1,050	25W	Frosted	36"	Bi-Pin	●
5817	LED14T8/FR17/840	14W	4000K	1,650	32W	Frosted	48"	Bi-Pin	●
5818	LED14T8/FR17/850	14W	5000K	1,650	32W	Frosted	48"	Bi-Pin	●
5819	LED16T8/FR17/840	16W	4000K	1,750	32W	Frosted	48"	Bi-Pin	●
5820	LED16T8/FR17/850	16W	5000K	1,850	32W	Frosted	48"	Bi-Pin	●
5775	LED18T8/FR19/840	18W	4000K	1,900	17W	Frosted	48"	Bi-Pin	●
5776	LED18T8/CL19/840	18W	4000K	1,900	32W	Clear	48"	Bi-Pin	●
5773	LED18T8/FR19/850	18W	5000K	1,900	32W	Frosted	48"	Bi-Pin	●
5777	LED18T8/CL19/850	18W	5000K	1,900	32W	Clear	48"	Bi-Pin	●
5811	LED40T8/96FR43/840	40W	4000K	4,300	75W	Frosted	94"	Single	●
5812	LED40T8/96FR43/850	40W	5000K	4,300	75W	Frosted	94"	Single	●