

Mogul-Base LED Replacement Lamp

3000K, 4000K / 27W, 36W, 45W, 54W



Project:	
Catalog#:	
Approved by:	

**No Ballast needed (UL Type B)
Internal driver/line voltage lamp
Remove ballast from fixture**

Applications

Features

- Reduced Uplight, Base Down
- Cutoff Distribution, No LED's on Top
- 107-109 Lm/W
- Power Factor: >0.9
- CCT: 3000K or 4000K; CRI: >80
- Long Life: 10 years
- Operating temperature range: -40 to +140°F
- IP64 Design - Driver is fully potted with silicone.
- Waterproof, dust proof, and bug proof
- Flame retardant material
- UL/cUL Listed, UL Classified
- 120-277 VAC, 50/60Hz
- Non-dimming
- Warranty: 5 Years
- No Fan



Acorn



Ball



Post Top



Ordering Information


Catalog #	Lumens	CCT	Watts	Lm/W	Cover	Base	Replacement
LEDMXR-3027-MV	2900	3000	27	107	Clear	EX39	100W HPS or MH
LEDMXR-4027-MV	2900	4000	27	107	Clear	EX39	100W HPS or MH
LEDMXR-3036-MV	3900	3000	36	108	Clear	EX39	150W HPS or MH
LEDMXR-4036-MV	3900	4000	36	108	Clear	EX39	150W HPS or MH
LEDMXR-3045-MV	4900	3000	45	109	Clear	EX39	175W MH
LEDMXR-4045-MV	4900	4000	45	109	Clear	EX39	175W MH
LEDMXR-3054-MV	5900	3000	54	109	Clear	EX39	200W HPS or MH
LEDMXR-4054-MV	5900	4000	54	109	Clear	EX39	200W HPS or MH

Mogul-Base LED Replacement Lamp

3000K, 4000K / 27W, 36W, 45W, 54W

Project:	
Catalog#:	
Approved by:	

Dimensions (in)

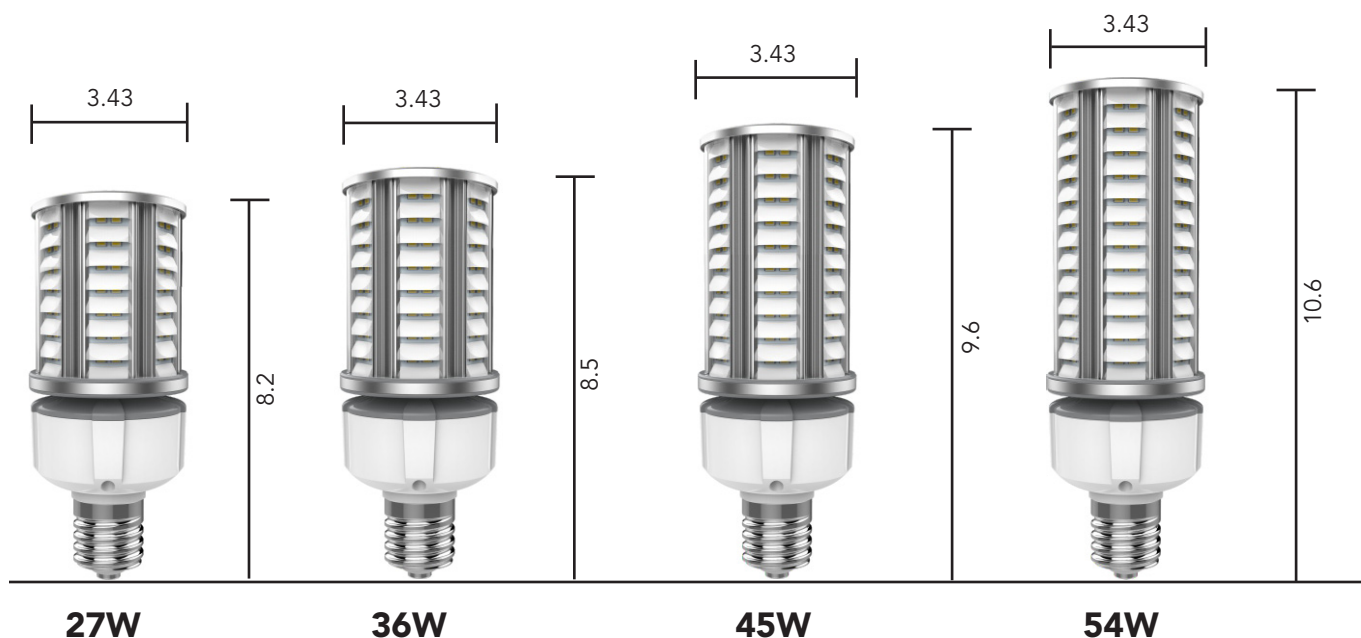

LEDMXR vs. Common Lamp Sizes

Lamp	Base	L (in.)	D (in.)	
LEDMXR-XX27-MV	EX39	8.2	3.43	
LEDMXR-XX36-MV		8.5		
LEDMXR-XX45-MV		9.6		
LEDMXR-XX59-MV		10.6		
LU100	E39	7.75	2.94	
LU150/55				
MH150/U		8.31	3.5	
MH175/U				
H39KB-175		8.25		
H37KC-175/DX				

