

Features & Benefits

- Double-sided Design Sign Light
- 360° Beam Angle
- Rotateable End Caps
- Internal Driver
- UL for Safety
- No UV, No Mercury
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Input from Both Ends
- Utilizes R17d sockets
- Compatible with controls and sensors
- Works in cold temperature applications
- Plastic tube for Shatterproof
- 5 Year Warranty



Internal Driver **LED Lamp**
Double End Input



Flex™
Internal Driver **LED Lamp**

Specification Data

Model No.	Length	Base type	Lamp Wattage	Input Voltage	CCT	Initial Lumens	CRI	Beam Angle	LPW	Power Factor	THD	Life (hours)
LS96T8HO/840/42P-ID DE	96	R17d	42	120-277	4000K	5000	80	360	120	0.9	<20%	50000
LS96T8HO/865/42P-ID DE	96	R17d	42	120-277	6500K	5000	80	360	120	0.9	<20%	50000

Ordering Information

EXAMPLE: **LS48T8HO/840/21P-ID DE**

L

Manufacturer's Code

S

Sign Light
Double-sided
Design

48

Normal Length
48=48"

T8

Lamp Shape
T8=T8

HO

HO Application
R17d Base

8

CRI
8
=>80

40

CCT
50
=5000K
40
=4000K
35
=3500K

21 P

Wattage
21P-21W


ID

Internal Driver

DE

Double End Input

Wiring diagram

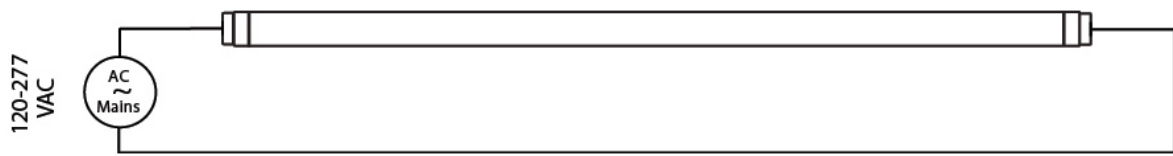

Espen Technology, Inc. | 12257 Florence Avenue | Santa Fe Springs, CA 90670 | Phone: (562) 529-2938 | Fax: (562) 529-2978
Toll-free: (866) 933-7736 | Email: info@espentech.com | www.espentech.com