

HP1527P • HP1527PBLS

Ballast Type:	Electromagnetic
Input Voltage:	277VAC+5%,-5%
Input Frequency:	60 Hz.

Starting Method:	Preheat
Lamp Connection:	Series
Unit Color;	Black

Unit Weight	1.60 lb.
Carton Quantity:	24
Skid Quantity:	1440

ELECTRICAL SPECIFICATION:

[illegible]

PERFORMANCE:

- Electromagnetic reactor type ballast
- Preheat start
- Series operation
- High power factor
- Encased & potted
- Sound rated A
- Meets ANSI C82.1

APPLICATION:


- Maximum case temperature: 194°F/90°C
- Maximum ambient temperature: 104°F/40°C
- Minimum starting temperature: 32°F/0°C
- Remote mounting: 10 ft.

SAFETY:

- UL listed (Class P, Type HL, Type 1 outdoor)
- CSA/C22.2 Certified
- Automatic reset thermal protector
- No PCB's
- RoHS Compliant

STYLE:


8

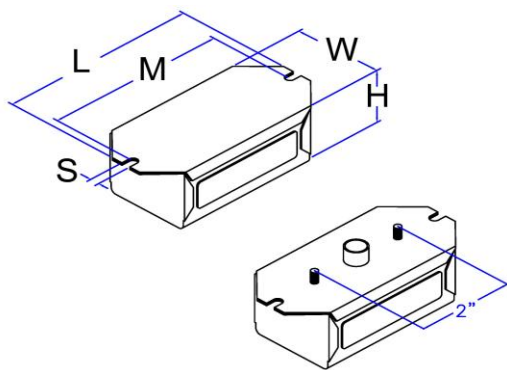

H	W	L	M	S
1 5/8	2 3/16	4 3/4	4 3/8	7/32
1.63	2.19	4.75	4.38	0.22
4.14 cm	5.56 cm	12.07 cm	11.03 cm	0.56 cm

WIRING DIAGRAM:

102

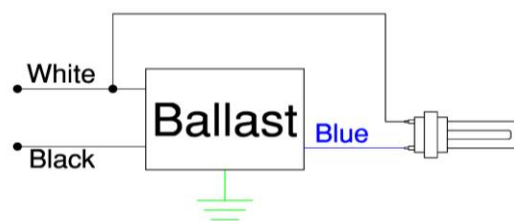

Standard lead lengths:

Side Leads

- | | | |
|-------------------|------------|--------------|
| • Blk: 12" | • Blu: 12" | • Wht: 12" |
| Bottom Leads Stud | | |
| • Blk: 12" | • Blu: 12" | • Wht: 12" |
| | | * 3/8" Strip |

WARRANTY

Robertson Worldwide warrants to the purchaser that this ballast will be free from defects in material or workmanship for a period of 2 years from date of manufacture when properly installed and under normal conditions of use. For more information on Robertson Worldwide's ballasts, call 1-800-323-5633 or visit www.robertsonww.com. For our energy star compliant ballasts, visit www.nema.org/lampballastmatrix/

Revised 12/17/10

ROBERTSON WORLDWIDE

13611 Thornton Rd, Blue Island, IL 60406, TEL: 1-800-323-5633, FAX: 1-877-388-2420, www.robertsonww.com