

REN1L36L120

Ballast Type: Electronic
 Input Voltage: 120VAC±10%
 Input Frequency: 50/60 Hz.

Starting Method: Preheat Rapid Start
 Lamp Connection: Series
 Unit Color: White

Unit Weight: 0.60 lbs
 Carton Quantity: 60
 Skid Quantity: 1920

ELECTRICAL SPECIFICATION:

Line Voltage (V)	Lamp Type	Lamp Watts	No. of Lamps	Line Current (A)	Input Power (W)	Power Factor	Max Current THD (%)	Current Crest Factor	Ballast Factor	Wiring Diagram	B.E.F.
120	FT40W/2G11/RS	40	1	0.52	40	≥0.58	≤150	≤1.7	0.90	103	2.25
120	FT36W/2G11	36	1	0.44	32	≥0.58	≤150	≤1.7	0.85	103	2.66
120	FT24W/2G11	24	1	0.38	27	≥0.58	≤150	≤1.7	1.00	103	3.70
120	CFTR32W/GX24q	32	1	0.40	30	≥0.58	≤150	≤1.7	0.90	103	3.00
120	CFS38W/GR10q	38	1	0.44	32	≥0.58	≤150	≤1.7	0.80	103	2.50
120	F40T8	40	1	0.60	45	≥0.58	≤150	≤1.7	1.00	003	2.22
120	F32T8 F32T8U	32	1	0.51	38	≥0.58	≤150	≤1.7	1.10	003	2.89
120	F40T12	40	1	0.46	34	≥0.58	≤150	≤1.7	0.80	003	2.35
120	F40T12ES	34	1	0.42	32	≥0.58	≤150	≤1.7	0.80	003	2.50
120	F30T12	30	1	0.40	28	≥0.58	≤150	≤1.7	0.85	003	3.04
120	F30T12ES	30	1	0.38	27	≥0.58	≤150	≤1.7	0.85	003	3.15

PERFORMANCE:

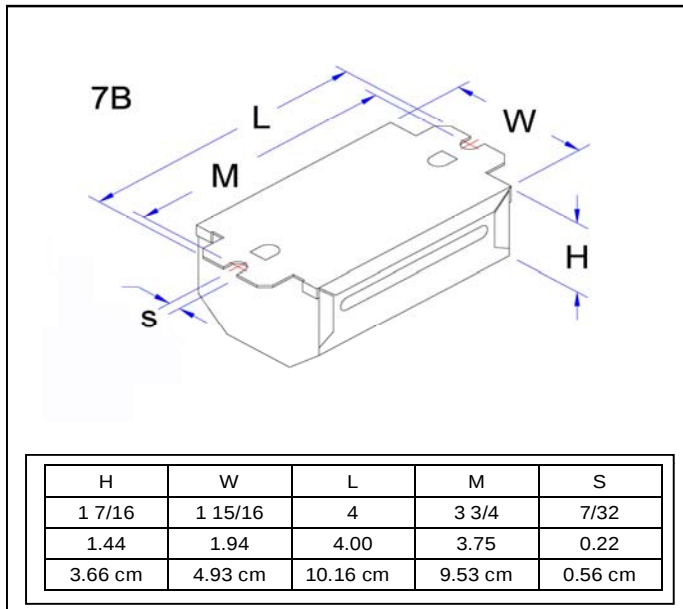
- Electronic ballast
- Preheat rapid start
- Series operation
- Normal power factor
- Encased & potted
- Sound rated A
- Internal surge protection
- Meets ANSI standard C82.11
- Meets ANSI standard C62.41

APPLICATION:

- Maximum case temperature: 167°F/75°C
- Maximum ambient temperature: 104°F/40°C
- Minimum starting temperature: 0°F/-18°C
- Lamp starts: >15,000 starts
- Remote mounting: 18 ft.

SAFETY:

- UL/935 (Class P, Type 1 outdoor) listed
- CSA/C22.2 certified
- Inherent Thermal Protection
- No PCB's

STYLE:

WARRANTY:

Robertson Worldwide warrants to the purchaser that this ballast will be free from defects in material or workmanship for a period of 3 years from date of manufacture when properly installed and under normal conditions of use. For more information on Robertson Worldwide ballasts, call 1-800-323-5633 or visit www.robertsonww.com. Specifications subject to change without notice.

WIRING DIAGRAM:
