

SS2PWS

Ballast Type:	Electromagnetic
Input Voltage:	120VAC+5%, -10%
Input Frequency:	60 Hz.

Starting Method:	Preheat Self Start
Lamp Connection:	Series
Unit Color:	White

Unit Weight:	0.83
Carton Quantity:	60
Skid Quantity:	1920

ELECTRICAL SPECIFICATION:

[illegible]

PERFORMANCE:

- Electromagnetic reactor type ballast
- Preheat self start
- Series operation
- Normal power factor
- Encased and potted
- Sound rated A
- Meets ANSI C82.1


APPLICATION:

- Maximum case temperature: 194°F/90°C
- Maximum ambient temperature: 104°F/40°C
- Minimum starting temperature: 50°F/10°C
- Remote mounting: 10 ft.

SAFETY:

- UL/935 (Class P, Type HL, Type 1 outdoor) listed
- CSA/C22.2 Certified
- No PCB's
- Automatic reset thermal protector
- RoHS Compliant


STYLE:

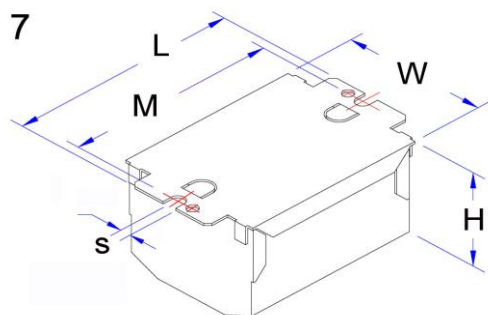

H	W	L	M	S
1 7/16	1 7/8	3	2 3/4	3/16
1.44	1.88	3.00	2.75	0.19
3.66 cm	4.78 cm	7.62 cm	6.99 cm	0.47 cm

WIRING DIAGRAM:

036

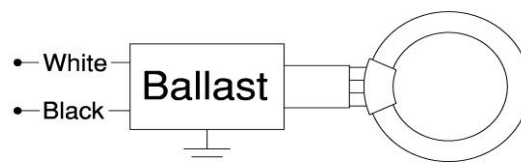

Standard lead lengths:

- Blk: 7"
- Wht: 7"
- Socket assembly: 7"

* 3/8" Strip

WARRANTY

Robertson Worldwide warrants to the purchaser that this ballast will be free from defects in material or workmanship for a period of 2 years from date of manufacture when properly installed and under normal conditions of use.