




ELECTRONIC BALLAST-1 & 2 Light

RESIDENTIAL - NPF
RAPID START
FOR USE WITH F17T8, F15T8, F20T8, F20T12

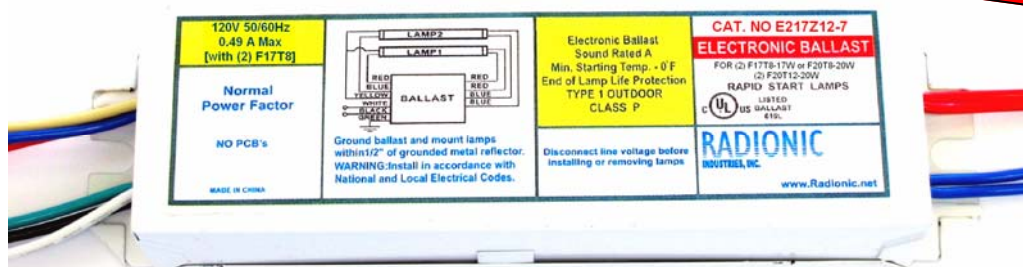

Key Benefits

- VALUE PRICED
- **FCC-B**
- **ENERGY STAR**
- 2 YEAR WARRANTY
- CLASS P
- cULus LISTED

Features

- 120V, 50/60 Hz
- MULTI-LAMP TYPE DESIGN
- CREST FACTOR < 1.7
- THD < 130%
- NORMAL POWER FACTOR: > 50%
- MINIMUM STARTING TEMP: 0° F
- END OF LIFE (EOL) PROTECTION

Catalog Number	Input Voltage	Lamp Type	Rated Lamp (W)	Lamp Qty	(Max.) Input Watts	(Max.) Line Amps	Ballast Factor	Power Factor	Crest Factor
E217Z12-7	120VAC 50/60 Hz	F17T8	17	2	30.0	0.42	0.88	> 0.5	< 1.7
		F20T8	20	2	27.0	0.37			
		F20T12	20	2	27.4	0.38			
E217Z12-15	120VAC 50/60 Hz	F15T8	15	2	25.1	0.36	0.88	> 0.5	< 1.7
		F20T8	20	2	27.0	0.37			
		F20T12	20	2	27.4	0.38			
E117Z12-15	120VAC 50/60 Hz	F15T8	15	1	16.3	0.25	0.95	> 0.5	<1.7
		F20T8	20	1	18.1	0.27			
		F20T12	20	1	17.8	0.26			

Enclosure Dimension (inches)

Length (L)	Width (W)	Height (H)	Mounting (M)
6.56	1.75	1.00	6.00

